



**PERMANENT
TP-125**

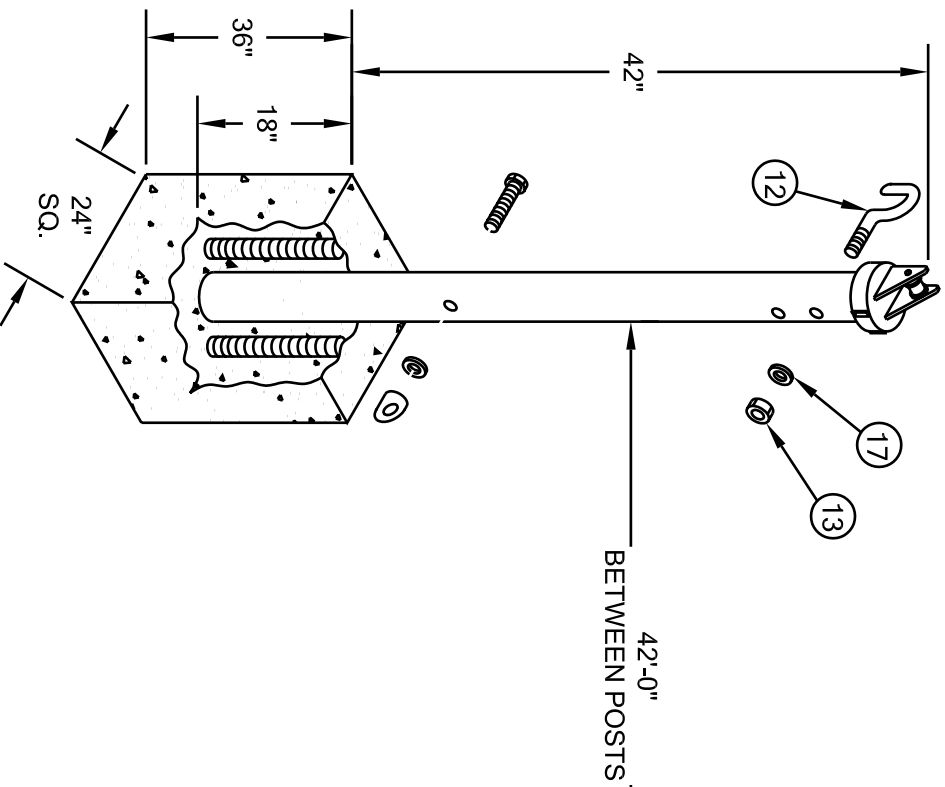

**SEMI-PERMANENT
TP-150**

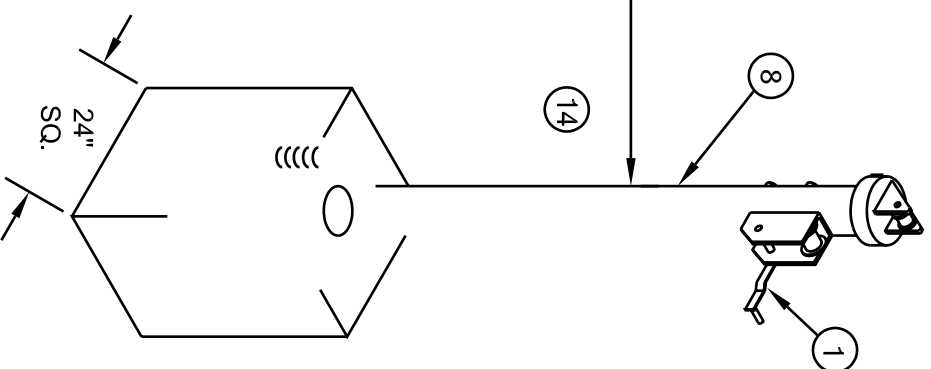

THESE ARE MINIMUM SUGGESTED DIMENSIONS FOR AVERAGE SOIL CONDITIONS.

NOTE: CONCRETE SPECIFIED SHOULD BE 4000# MIN. CURING TIME SHOULD BE 14 DAY MIN. BEFORE PUTTING INTO SERVICE.

TP-125/150

PERMANENT AND SEMI-PERMANENT
TENNIS POSTS

JAYPRO SPORTS

PERMANENT AND SEMI-PERMANENT TENNIS POSTS, TP-125/150 LIST OF MATERIALS

<u>PIECE NO.</u>	<u>PART NO.</u>	<u>DESCRIPTION</u>	<u>QTY.</u>
1	RT-5	RATCHET WHEEL WITH HANDLE	1
2	HS324	SET SCREW 3/8"-16 x 1/2"	4
3	AF71	PULLEY CAP	2
4	HN2949	EYENUT 3/8"-16	2
5	05319	HEX HEAD SCREW 1/4"-20 x 2"	2
6	HN256	LOCK NUT 1/4"-20	2
7	AF737	PULLEY	2
8	TP1252	UPRIGHT ASSEMBLY	2
9	AF1213A	SLEEVE-TOP CAP (TP-150 ONLY)	2
10	AP5010	GROUND SLEEVE (TP-150 ONLY)	2
11	RP717	SLEEVE-BOTTOM CAP (TP-150 ONLY)	2
12	HB852	U-BOLT 3/8"-16 x 4"	1
13	HN265	LOCK NUT 3/8"-16	1
14	HW337	LOCK WASHER 3/8"	2
15	HS856	HEX HEAD BOLT 3/8"-16 x 4"	4
16	HN1230	THIN LOCK NUT 1/2"-13	2
17	HW2047	FLAT WASHER 3/8"	3

IMPORTANT

FOR TENNIS SLEEVE INSTALLATION, SET SLEEVES 42'-3 1/2" ON CENTER.

FOR OUTDOOR VOLLEYBALL INSTALLATION, SET SLEEVES 36' ON CENTER.

TP-150, SEMI-PERMANENT TENNIS POSTS SLEEVE INSTALLATION INSTRUCTIONS

Set ground sleeves exactly 42'-3 1/2" on center (42' between posts). This may require the services of a qualified local contractor familiar with the soil conditions and building codes particular to your area. The referenced minimum concrete dimensions are typical for average conditions, but unusual conditions may warrant modifications by the contractor.

IMPORTANT: PROPER INSTALLATION OF THE GROUND SLEEVES IS ESSENTIAL TO THE SUCCESSFUL PERFORMANCE OF THIS UNIT.

NOTE: CONCRETE SPECIFIED SHOULD BE 4000# MIN. CURING TIME SHOULD BE 14 DAY MIN. BEFORE PUTTING INTO SERVICE.