

## ASSEMBLY INSTRUCTIONS FOR 9B9301 KWIK BENCH SHADE

- 1. Unpack all parts and check for damage that may have occurred during shipping. If damage has occurred, notify Kwik Goal immediately. Lay out all parts. Remove all cardboard and packaging immediately. Wet or damp packaging may damage contents.
- 2. Read through entire instruction before beginning assembly and installation.




\*\*\*CAUTION\*\*\*

In slight wind, Kwik Bench Shade will cause assembled unit to overturn without any person or weight on Kwik Bench. In windy conditions this unit could be damaged, come apart, or cause injury

> 140 Pacific Drive Quakertown, PA 18951 800-531-4252 Kwikgoal.com © 2019 Rev 2020 Kwik Goal Ltd.

3. Starting at one location, attach shade tube and tube clamp assembly to Kwik Bench (Not Supplied) as shown. Note: Make sure the open end of shade tube is at the top.

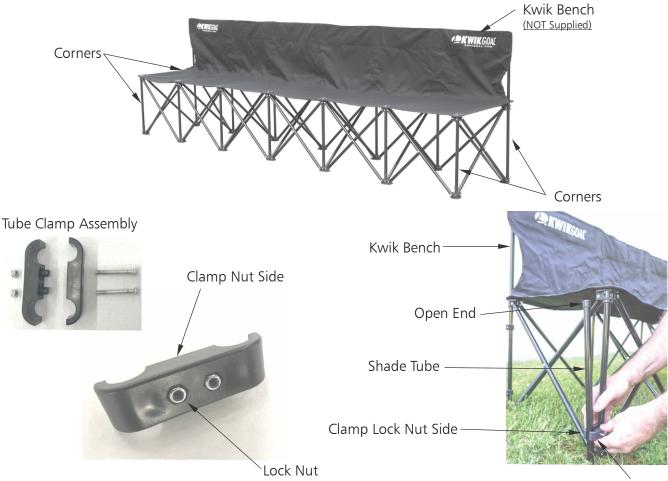


4. Tighten screws until clamp is snug on Kwik Bench and shade tube as shown. Do not overtighten screws.

As high as possible

Clamp Screw Side






5. Attach remaining tube clamp assemblies to all four corners on Kwik Bench as shown in steps 3 and 4. Do not overtighten screws.

## \*\*\*CAUTION\*\*\*

In slight wind, Kwik Bench Shade will cause assembled unit to overturn without any person or weight on Kwik Bench. In windy conditions this unit could be damaged, come apart, or cause injury 6. Assemble shade rod frame assembly.



7. Starting at one end of shade insert one shade rod frame assembly into shade pocket as shown.

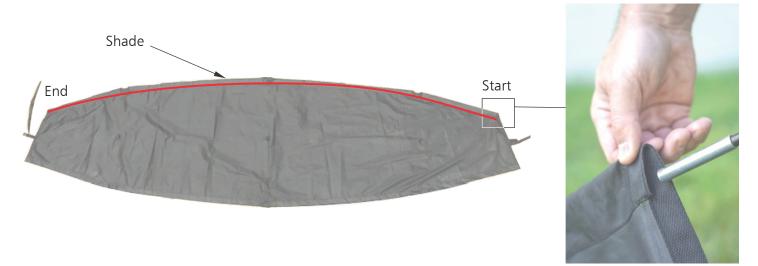

8. Insert the second shade rod frame assembly into shade pocket.



## \*\*\*CAUTION\*\*\*

In slight wind, Kwik Bench Shade will cause assembled unit to overturn without any person or weight on Kwik Bench. In windy conditions this unit could be damaged, come apart, or cause injury

9. With shade and shade rod assemblies installed, lift shade over Kwik Bench with Kwik Goal logos toward the front. Insert ends of shade rod assemblies into shade tubes at all 4 locations.



10. Connect side straps of shade to the X-brace at each side of Kwik Bench and pull strap snug. Do not over pull, too much tension could cause damage to shade.



\*\*\*CAUTION\*\*\*

In slight wind, Kwik Bench Shade will cause assembled unit to overturn without any person or weight on Kwik Bench. In windy conditions this unit could be damaged, come apart, or cause injury 11. Insert end shade tension rods into shade pockets at each end as shown and secure shade to tension rod with velcro tab.



\*\*\*CAUTION\*\*\* In slight wind, Kwik Bench Shade will cause assembled unit to overturn without any person or weight on Kwik Bench. In windy conditions this unit could be damaged, come apart, or cause injury

Velcro Tab

13. Attach shade center strap on to the back at the center of Kwik Bench at location shown and pull strap snug. Do not over pull, too much tension could cause damage to shade.



14. To collapse Kwik bench disconnect shade straps, shade tension rods and remove shade rod assemblies from shade tubes at all four locations. Remove shade rods assemblies from shade pockets. Rod assemblies and shade can be packed into carry bag.

NOTE: Rod tubes and tube clamps do NOT need to be removed to fold bench.

Go to kwikgoal.com for additional product information.

## \*\*\*CAUTION\*\*\*

In slight wind, Kwik Bench Shade will cause assembled unit to overturn without any person or weight on Kwik Bench. In windy conditions this unit could be damaged, come apart, or cause injury