
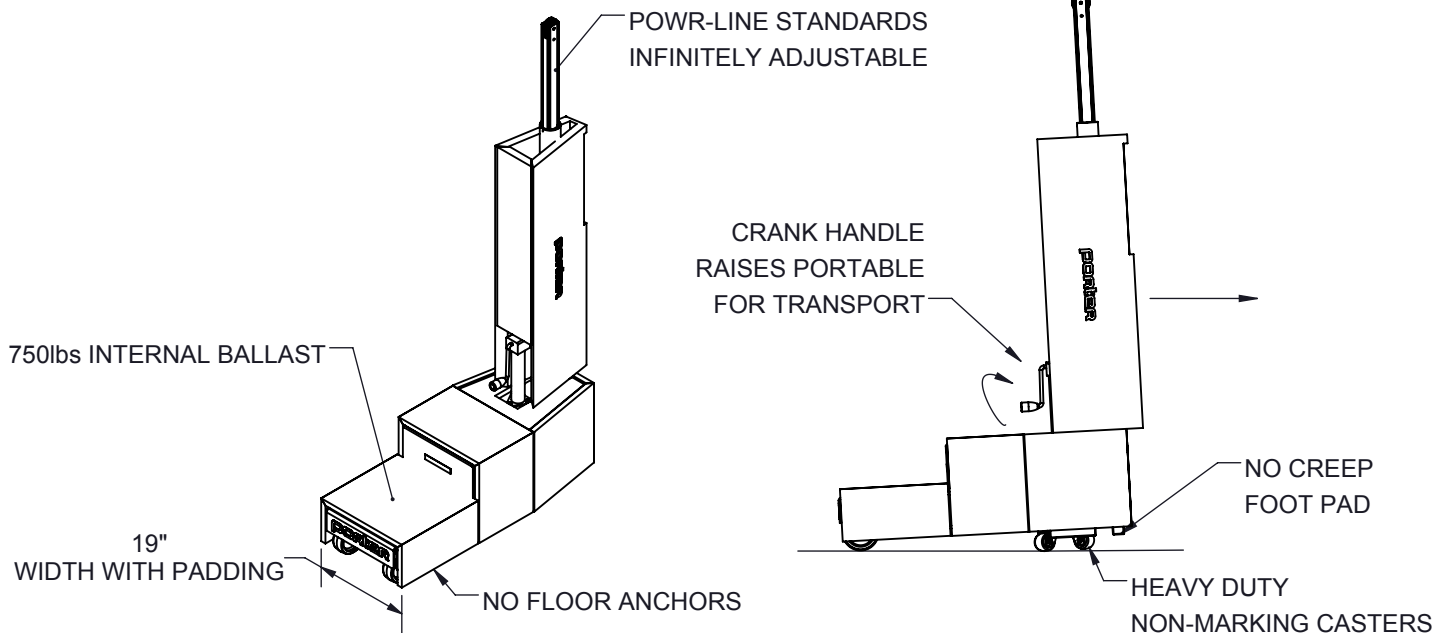


1935 - POWR-COURT VOLLEYBALL SYSTEM

FULLY PORTABLE VOLLEYBALL END STANDARDS

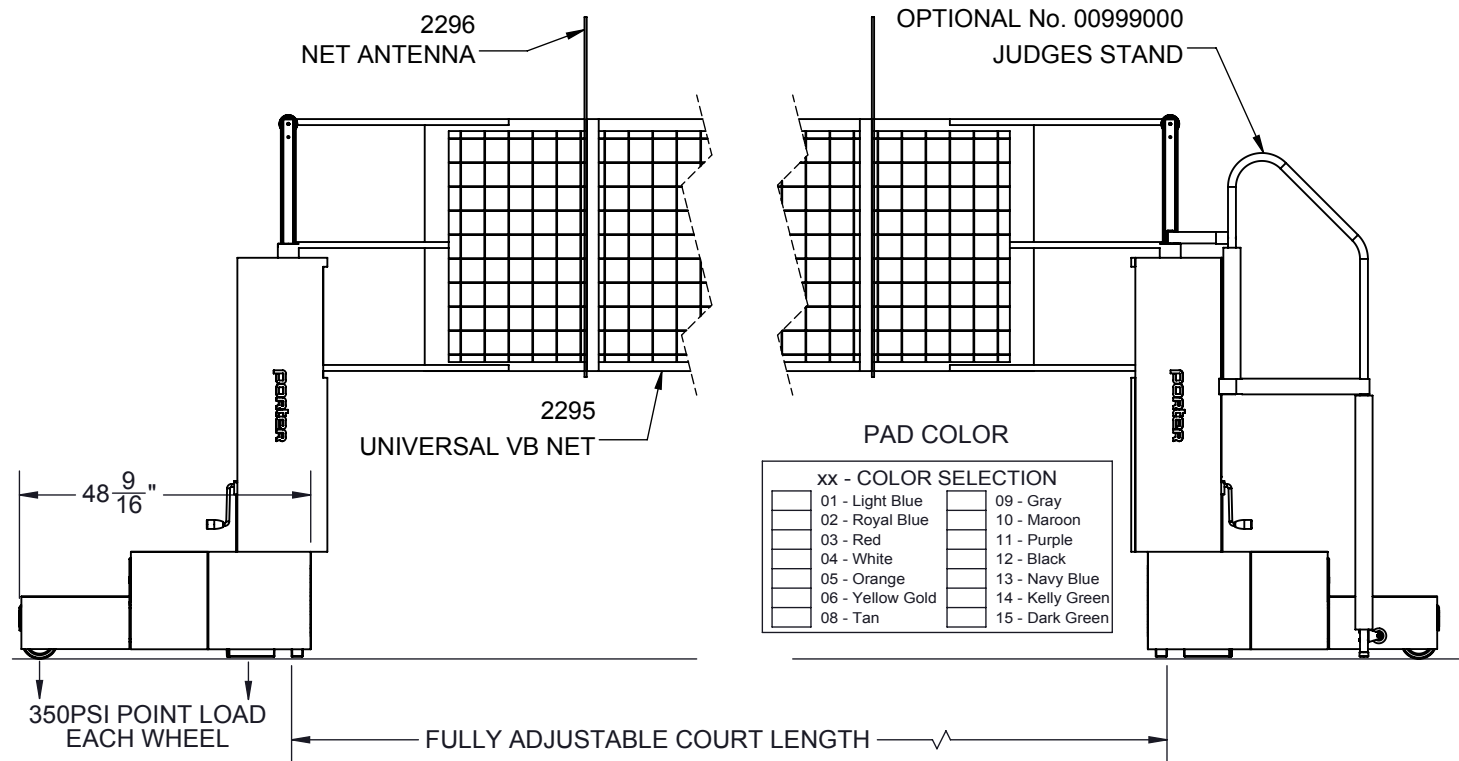

____ - 1935XX POWR-COURT END STANDARDS (PAIR)
INCLUDES PADDING, WINCH, NET, AND ANTENNAS

____ - 1935XXSP POWR-COURT END STANDARDS (PAIR)
INCLUDES GRAPHIC PADDING, WINCH, NET, AND ANTENNAS

____ - 00999000 FITTED JUDGE'S STAND
____ - 9931XX SET OF PROTECTIVE PADS FOR JUDGE'S STAND

1935 - POWR-COURT VOLLEYBALL SYSTEM

FULLY PORTABLE VOLLEYBALL END STANDARDS

SPECIFICATIONS

PORTER No. 1935XX POWR-COURT PORTABLE VOLLEYBALL STANDARDS (PAIR)

System shall be a fully portable volleyball unit consisting of two upright post and base assemblies. Entire assembly shall comply with all USAV, NCAA and NFHS requirements for competition volleyball.

Upright posts shall be aluminum telescoping type with infinite height adjustment settings. Posts that do not telescope (that extend above the top of the net) will not be approved as equal.

Base shall be welded steel and furnished with two (2) rear casters, and one (1) front swivel caster assembly. Front caster assembly shall connect to the base frame with a heavy duty jack crank. Casters shall be high-quality polyurethane and non-marking. Base assembly shall be furnished complete with compact, heavy solid steel ballast (750#) weights concealed and nested inside the rear of the frame. Ballast shall be of sufficient anchoring weight to avoid any floor anchors or "creep" when the net is tensioned. Bases that require anchoring will not be approved as equal.

System width shall not exceed 20" with padding

Pad shall be designed and fabricated to meet the latest requirements as prescribed by the USAV, NFHS, and NCAA for player protection and safety. Pad shall cover the front and sides of the base units and extend up to a minimum height of 6'-0" above the floor. Pad shall be of thick shock absorbing foam, covered in a heavy 15 oz. (per square yard) vinyl coated polyester scrim material.

Tensioning reel shall be a vertical lift, worm gear winch with steel frame. Frame construction shall be of interlocking steel for high rigidity and precise alignment, semi enclosed for safety, and powder coated for corrosion resistance. Self-locking worm drive will prevent snap back or loss of tension. Net shall attach directly to the winch eliminating the need for straps.

System shall consist of two portable weighted bases, two Powr-Line aluminum uprights, one winch, full pad sets, universal net, net height chain, and net antennas.

NOTE: System not recommended for use on poured court surfaces