
# 1971 POWR-RIB II VOLLEYBALL SYSTEM

## SLEEVE-TYPE 3 ½" OD ALUMINUM VOLLEYBALL END STANDARDS



PARTS LIST - No. 1971						
No.	QTY.	. DESCRIPTION				
1	2	UPRT 00296 000 UPRIGHT ASSEMBLY				
2	1	WINH 00099 TENSION WINCH				
3	1	SLVE 00070 001 SLEEVE WITH PULLEY				
4	1	SLVE 00071 001 SLEEVE WITH NET TIE-OFF				
5	2	LABL 00167 000 HEIGHT LABEL - 7'-11%"				
6	2	LABL 00168 000 HEIGHT LABEL - 7'-4%"				
7	2	LABL 00169 001 HEIGHT LABEL - 7'-0"				
8	2	LABL 00170 000 HEIGHT LABEL - BADMINTON				

OTY DART No DECORPTION

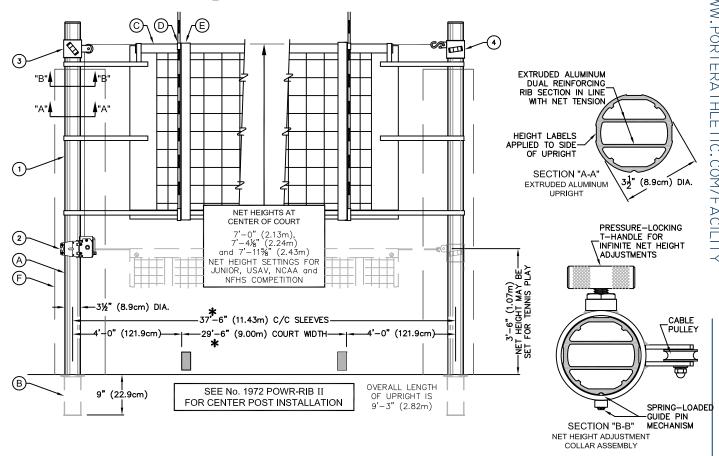

- 1971 POWR-RIB II VOLLEYBALL STANDARDS (PAIR)
- \_ 1971-9XX POWR-RIB II VOLLEYBALL STANDARDS WITH PADS (PAIR)
- . 1971-9XXSP POWR-RIB II VOLLEYBALL STANDARDS WITH GRAPHIC PADS (PAIR)

DACEN

QIY	PARINO.	DESCRIPTION	NO.	PAGE NO.
	VARIOUS	3 1/2" DIA FLOOR SLEEVE - EACH	В	VARIOUS
	2295	UNIVERSAL VOLLEYBALL NET	С	V-2295
	2296	NET ANTENNA (PAIR)	D	V-2296-1
	02297-000	BOUNDARY MARKERS (PAIR)	E	V-2296-1
	8390XX	UPRIGHT PROTECTIVE PADS	F	V-839
	02991-340	TENNIS NET - 34' x 39" (NOT SHOWN)		V-2991
	00889-100	JUDGE'S STAND (NOT SHOWN)		V-889-1
	9931XX	PADS FOR JUDGE'S STAND (NOT SHOWN)		V-993-1
		, ,		



PROJECT NUMBER

PROJECT NAME

VOLLEYBALL SPECIFICATION SHEET

V-1971

# 1971 POWR-RIB II VOLLEYBALL SYSTEM

## SLEEVE-TYPE 3 1/2" OD ALUMINUM VOLLEYBALL END STANDARDS

### **SPECIFICATIONS**

## PORTER No. 1971 POWR-RIB II VOLLEYBALL STANDARDS (PAIR)

Posts shall be provided in a high strength (6063T6), lightweight aluminum alloy, designed with dual internal reinforcing ribs to provide maximum rigidity and minimum deflection. Posts to be finished in a durable clear anodized finish. Both ends of upright posts shall be fitted with a special molded, composite type cap to protect finished floors when moving standards.

Uprights shall be 3-1/2" (8.9cm) O.D. to fit standard floor sleeves for new construction or existing floors. Specify No. 870, 872, 873 or 875 type floor sleeve.

Upright posts shall be equipped with special sliding collar devices incorporating a spring-loaded guide pin and positive pressure locking T-handle mechanism for instant net height settings for tennis, badminton and volleyball, to meet all USAV, NCAA and NFHS requirements for competition. Posts shall be furnished with height marking labels for BOYS'/MEN'S height setting of 7' 11-5/8" (2.43m), GIRLS'/WOMEN'S height setting of 7' 4-1/8" (2.24m),12 YEAR AND UNDER height setting of 7'-0" (2.13m), and BADMINTON height setting of 5'-0" (1.52m).

Adjustable collar assemblies shall be positioned on a vertical axis by means of an external groove in the extruded aluminum upright, which is engaged by a spring-loaded ball/pin mechanism to prevent rotational movement of the collar. A pressure locking, threaded T-handle assembly shall be located on the opposite side of the collar assembly and shall tighten securely against a flat, extruded channel indent on the upright post for a positive locking system.

Tensioning reel shall be a vertical lift, worm gear winch with steel frame. Frame construction shall be of interlocking steel for high rigidity and precise alignment, semi enclosed for safety, and powder coated for corrosion resistance. Self-locking worm drive will prevent snap back or loss of tension. Net shall attach directly to the winch eliminating the need for straps.

Standards shall consist of one reel post and one end post. (For multiple court usage, specify additional No.1972 Powr-Rib II center standards as required).

#### **NET SELECTION**

Specify No. 2235 tennis net if 42'-0" sleeve centers are used.

Specify No. 02991-340 tennis net if 35'-6" sleeve centers are used.

Specify No. 2236110 net for badminton application.

### WARRANTY

Volleyball system furnished with the following warranty:

Uprights – 10 year limited warranty

Winch – 1 year limited warranty