
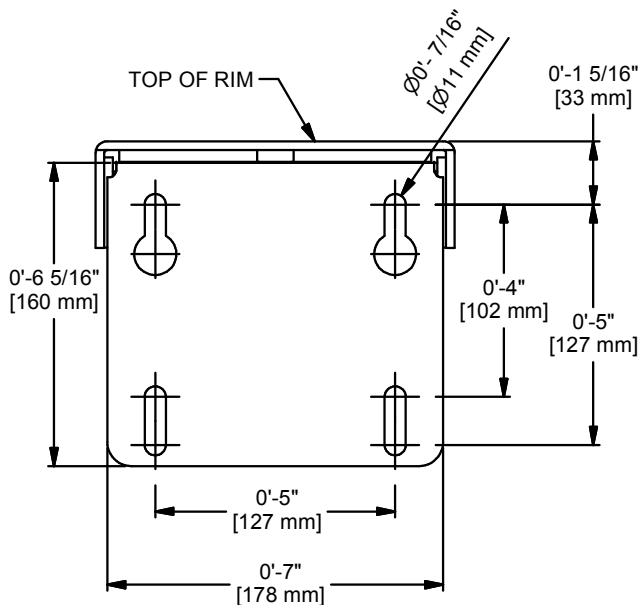



FINISH IS OFFICIAL ORANGE POWDER COAT

GOAL IS SUPPLIED WITH ANTI-WHIP NYLON NET AND MOUNTING HARDWARE

SHIPPING WEIGHT 25 LBS [11.3 Kg]

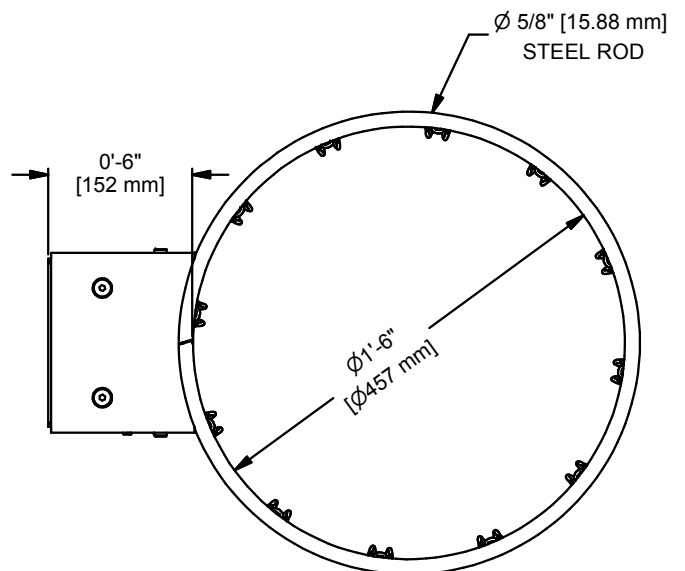

MOUNTING PLATE VIEW

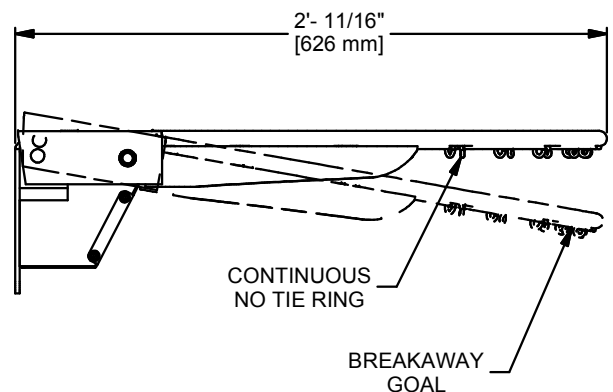

E	JJC	11/17/17
D	RWP	04/21/08
C	WAE	12/20/16
B	JJC	12/03/03
A	JJC	10/17/03
REV	BY	DATE



Gared Holdings, LLC
9200 E. 146th St. Noblesville, IN 46060

THIS DOCUMENT CONTAINS TRADE SECRET AND OTHER MATERIALS WHICH ARE PROTECTED BY CONFIDENTIALITY NOTICE AND AGREEMENT AND BY COPYRIGHT. ANY USE OR COPYING OF THIS DOCUMENT EXCEPT AS AUTHORIZED BY GARED HOLDINGS, LLC IS STRICTLY PROHIBITED.

COLLEGIATE GOAL, BREAKAWAY POSITIVE LOCK

DRAWN	CONNERLEY	DATE	5/8/2003	DATE ISSUED
APPROVED		DATE		
FILE LOC. Q:\Inventor Files\Specification Files\08_Goals				
SIZE	SCALE	SHT. NO.	PART NO.	REV
A	NONE	1 OF 2	2000+	E



MODEL 2000+

POSITIVE LOCK BREAK-AWAY GOAL



The 2000+ goal shall be constructed with an enclosed positive lock mechanism to hold rim in solid playing position. Goal shall be designed so that any possible entrapment areas have been eliminated.

Goal shall have official size 18" ring of 5/8" diameter steel with continuous no-tie net attachment, full wing brace design, and a durable orange powder coated finish. Anti-whip net and hardware shall be included. Hole spacing shall be 5" x 5". Goal shall meet NCAA and high school specifications.



ACCESSORIES

BACKBOARDS


See Goal-Board Matrix specification sheet for board compatibility.

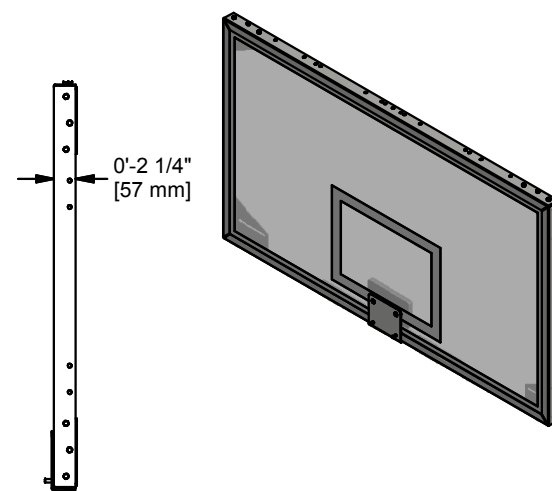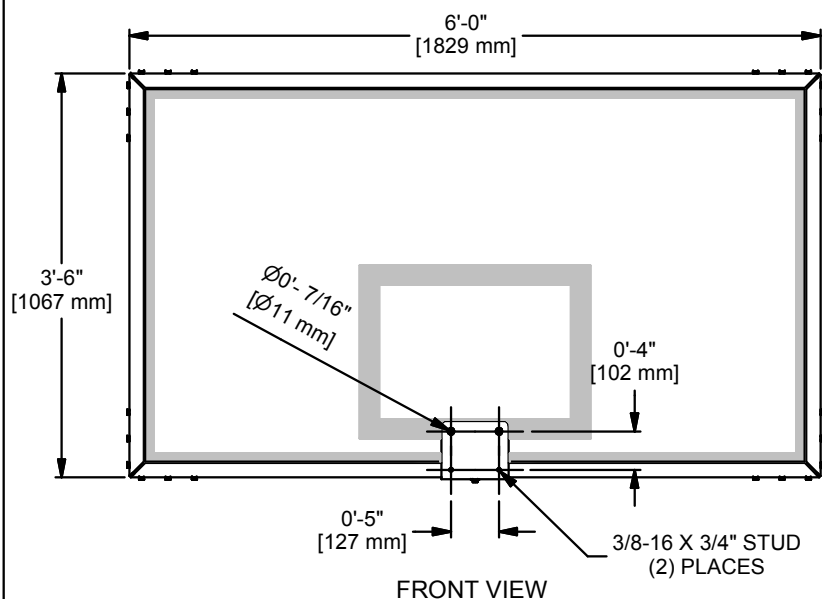

SIDE VIEW

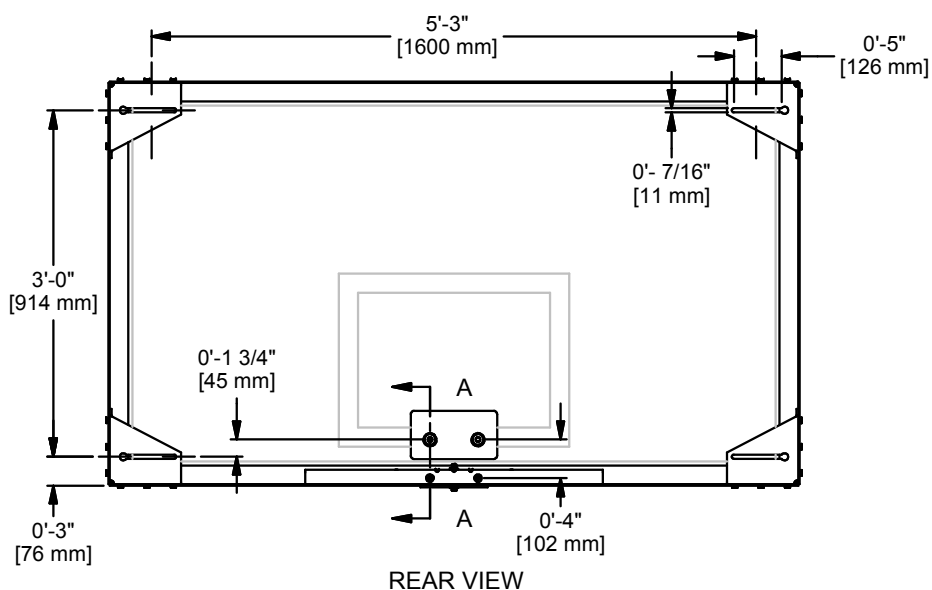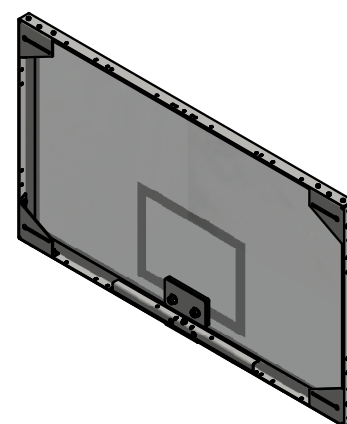

REAR VIEW

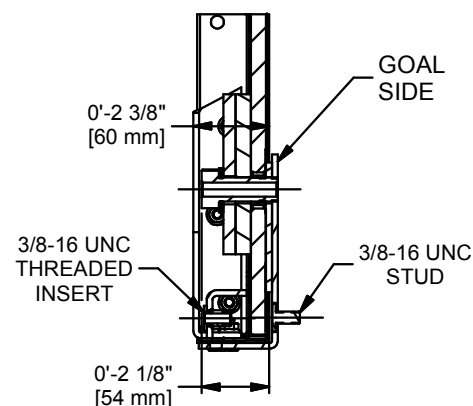

SECTION A-A

MATERIAL IS 1/2" THICK TEMPERED GLASS WITH STEEL FRAME
FINISH IS GRAY POWDER COAT ON BRACKETS AND PLATES..

D	JJC	11/15/17
C	RWP	06/08/09
B	RWP	06/06/08
A	JJC	12/01/03
REV	BY	DATE



Gared Holdings, LLC
9200 E. 146th St. Noblesville, IN 46060

THIS DOCUMENT CONTAINS TRADE SECRET AND OTHER MATERIALS WHICH ARE PROTECTED BY CONFIDENTIALITY NOTICE AND AGREEMENT AND BY COPYRIGHT. ANY USE OR COPYING OF THIS DOCUMENT EXCEPT AS AUTHORIZED BY GARED HOLDINGS, LLC IS STRICTLY PROHIBITED.

42" X 72" STEEL FRAME GLASS BACKBOARD

DRAWN	CONNERLEY	DATE	5/2/2003	DATE ISSUED
APPROVED		DATE		
FILE LOC. Q:\Inventor Files\Specification Files\07_Backboards				
SIZE	SCALE	SHT. NO.	PART NO.	REV
A	NONE	1 OF 2	LXP4200	D



MODEL LXP4200

STEEL FRAME 72" X 42" RECTANGULAR GLASS BACKBOARD

The LXP4200 backboard shall be fabricated with steel frame constructed of formed steel angles, former and fastened together and connected with heavy gauge steel mounting plates to reinforce corners. The lower horizontal frame section shall have a tubular steel support brace for added strength. Manufacturer of backboard shall have over ten years of experience producing such item. Backboard shall meet NCAA and high school requirements.


Entire frame and components shall be powder coated with a durable neutral gray finish. Acrylic cushioning pad shall be used between steel mounting plate and glass to protect board against possible breakage.

Glass shall be ½" in thickness and fully tempered with white target lines permanently fused onto the surface. 12mm glass will not be considered equal to ½" glass, with a nominal thickness range of .485" to .515", and will not be used as a substitute for full ½" glass. Vinyl shock absorbing material insulates the glass from the frame. Goal mounting holes shall be on standard 5" horizontal and 4" vertical centers.

ACCESSORIES

GOALS

See Goal-Board Matrix specification sheet for goal compatibility.

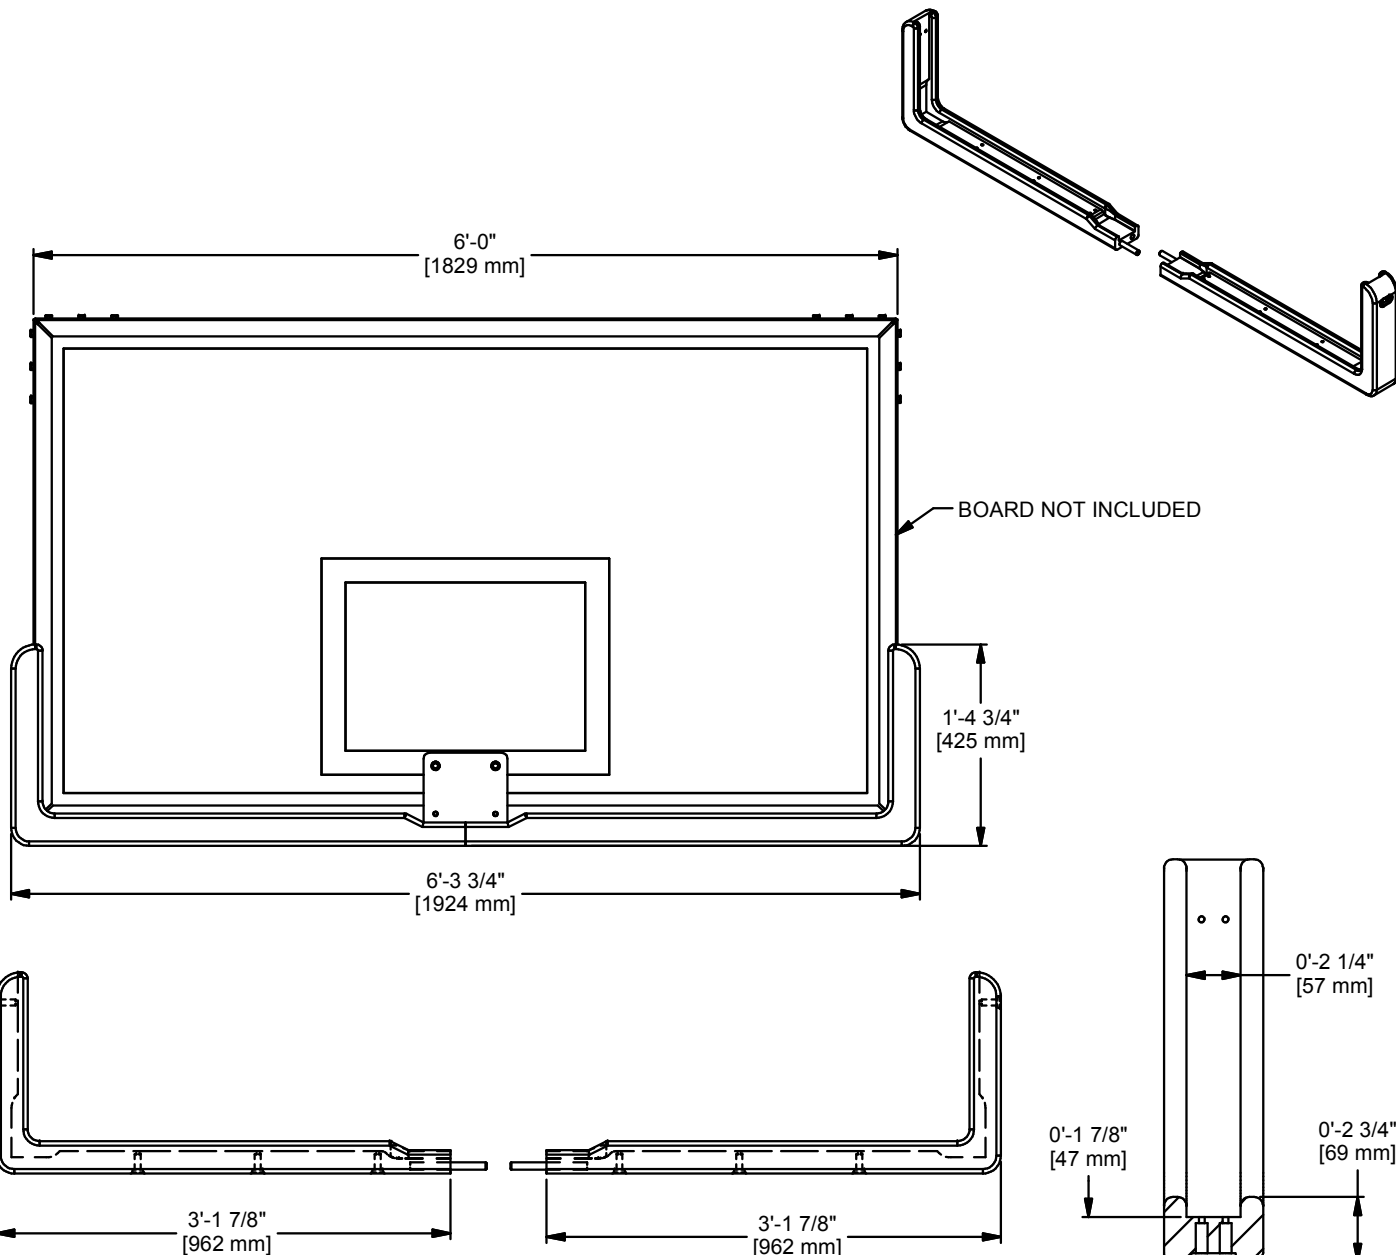

BOLT ON BACKBOARD PADDING IS DESIGNED FOR USE ON RECTANGULAR GLASS BOARDS WITH ALUMINUM OR STEEL FRAMES AND THE MODEL 1342, 2" THICK FIBERGLASS BOARD.

NOT RECOMMENDED FOR USE ON ANY WOOD BOARDS.

NOT FOR USE ON ANY FAN SHAPED BACKBOARDS.

SEE SHEET 2 FOR COLORS AVAILABLE.

CROSS SECTION

MODEL PCME PADS (1) BOARD

H	JJC	11/08/17
G	WDC	10/09/15
REV	BY	DATE



Gared Holdings, LLC
9200 E. 146th St. Noblesville, IN 46060

THIS DOCUMENT CONTAINS TRADE SECRET AND OTHER MATERIALS WHICH ARE PROTECTED BY CONFIDENTIALITY NOTICE AND AGREEMENT AND BY COPYRIGHT. ANY USE OR COPYING OF THIS DOCUMENT EXCEPT AS AUTHORIZED BY GARED HOLDINGS, LLC IS STRICTLY PROHIBITED.

BACKBOARD PADDING - BOLT ON

DRAWN	CONNERLEY	DATE	4/18/2003	DATE ISSUED
APPROVED		DATE		
FILE LOC.	Q:\Inventor Files\Specification Files\09_Accessories			
SIZE	SCALE	SHT. NO.	PART NO.	REV
A		1 OF 2	PMCE	H



MODEL PMCE
PRO MOLD CUSHION EDGE

APPLICATION

The double sided backboard padding is 2" thick, urethane foam that protects the players while the skin molding process protects the padding. Each half is 36" long and allows for 15" to run up the side of the rectangular backboard. Each half is symmetrical which allows the half sections to be used on both right and left sides of the backboard. Half sections bolt to all 72" official glass backboards that have a width of 2". Meets all NCAA, high school and FIBA specifications.

Mounting hardware is included.

Available in the following colors:

PMCE COLOR	PART NUMBER #
AWARENESS PINK	PMCEPINK
COLUMBIA BLUE	PMCECOL
ROYAL BLUE	PMCEROY
NAVY BLUE	PMCENAV
KELLY GREEN	PMCEKEL
FOREST GREEN	PMCEFST
RED	PMCERED
MAROON	PMCEMAR
BURGANDY	PMCEBUR
PURPLE	PMCEPUR
YELLOW	PMCEYEL
ORANGE	PMCEORNG
GOLD	PMCEGLD
BROWN	PMCEBRN
GREY	PMCEGRY
BLACK	PMCEBLK

Subject to design change and current manufacturing practices.