



-- OBV-100AK --
BEACH VOLLEYBALL ANCHOR KIT
Installation Instructions












Call Jaypro Sports Equipment at 1-800-243-0533 during regular business hours for technical support.

www.jaypro.com

OBV100AK


PARTS LIST (QTY: SINGLE UNIT)

IMAGE	DESCRIPTION	QTY
	(1) INSERT ANCHOR (P/N: OBV100-C)	2
	(2) STAKE FLAG 4" x 5" YELLOW (P/N: HM6633)	2
	(3) PLASTIC CORD GRIP 1/4"NPT (P/N: HM6634)	2
	(4) PLASTIC NUT, 1/4"NPT (P/N: HM6635)	2
	(5) 1/2" WASHER FLAT STD, SS (P/N: HW5025)	2
	(6) BLACK VINYL CAP (P/N: EC0069)	2
	(7) 5/8" x 18" L-HOOK ANCHOR BOLT (P/N: SR5562)	8
	(8) 5/8" FLAT WASHER (P/N: HW5072)	8
	(9) 5/8-11 HEX NUT (P/N: HN5087)	12
IMAGE	DESCRIPTION	QTY

Anchor Kits:

Model OBV-100AK – Insert Anchor

- ✓ An inverted design that elements the potential of sand and water contamination that can make removal difficult.
- ✓ Anchor is completely removable.
- ✓ Provided with a cap and identifying flag to safely identify its location beneath the sand.

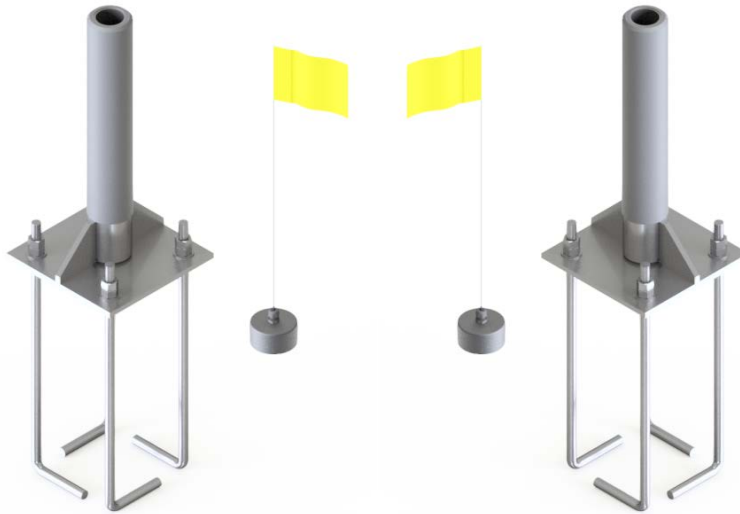


OBV-100AK
Insert Anchors

Upright Installation and Removal:

To install the poles, totally clean away all sand from around the anchor. Wipe down the anchor stem and apply a light coating of anti-seize lubricant or grease. After pole is installed backfill the area with sand.



To remove the pole, total dig away the sand surrounding the base. Slide the pole off the anchor stem. Cap-off the anchor stem with the cap and flag provided.


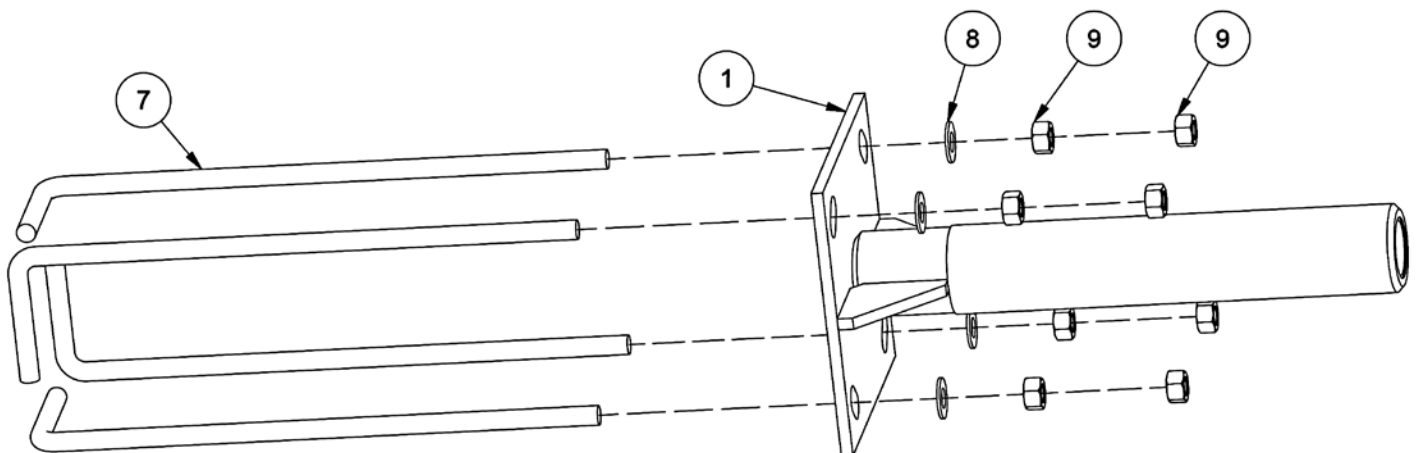


WHENEVER THE GROUND INSERT (6) IS NOT IN USE, IT SHOULD REMAIN COVERED WITH THE MARKER FLAG BOTH TO ENSURE THAT THE INSERT ISN'T FILLED WITH SAND AS WELL AS TO INDICATE THE LOCATION OF THE INSERT.

PROCEDURE

1. INSERT CORD GRIP (3) INTO TOP CAP (1).
 2. INSTALL WASHERS (5) AND NUT (4).
 3. INSERT STAKE FLAG (2) INTO CORD GRIP (3) SUCH THAT THERE IS SOME OF THE RUBBER SLEEVE IS EXPOSED.
 4. TIGHTEN NUT ON CORD GRIP UNTIL THE FLAG NO LONGER SLIDES IN GRIP.
- SLIDE CAP OVER GROUND INSERT AND BURY WITH SAND.

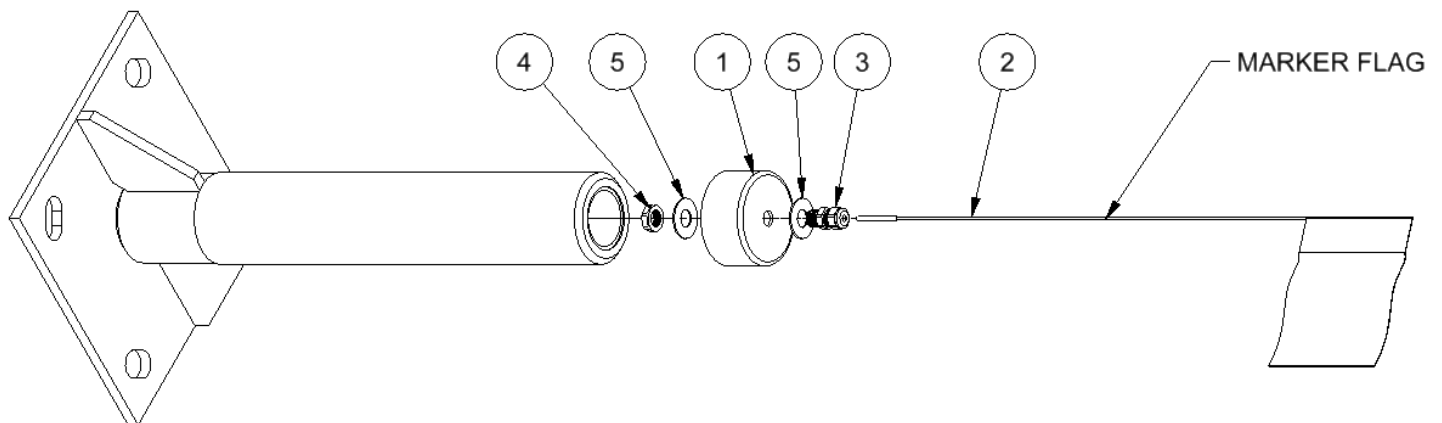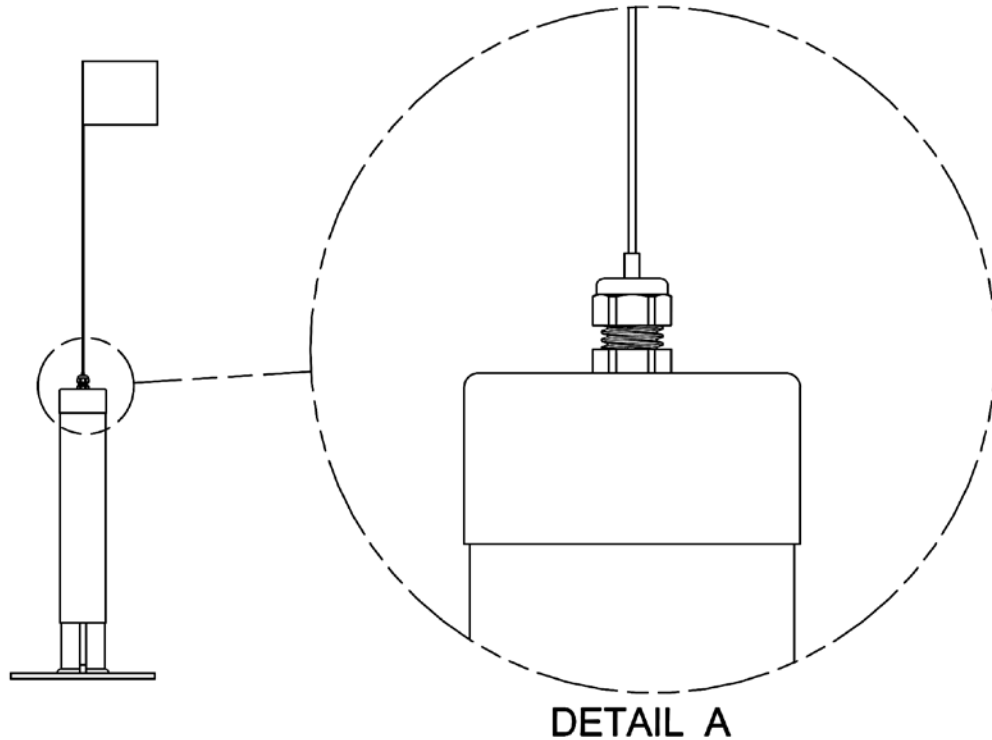

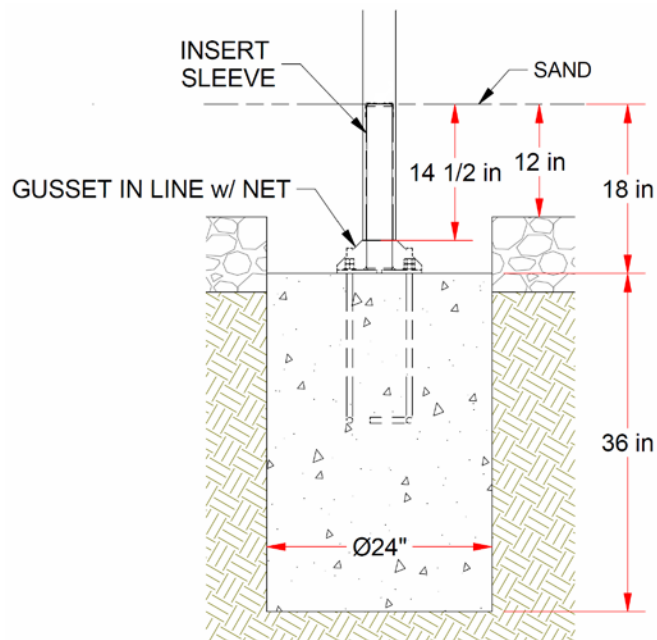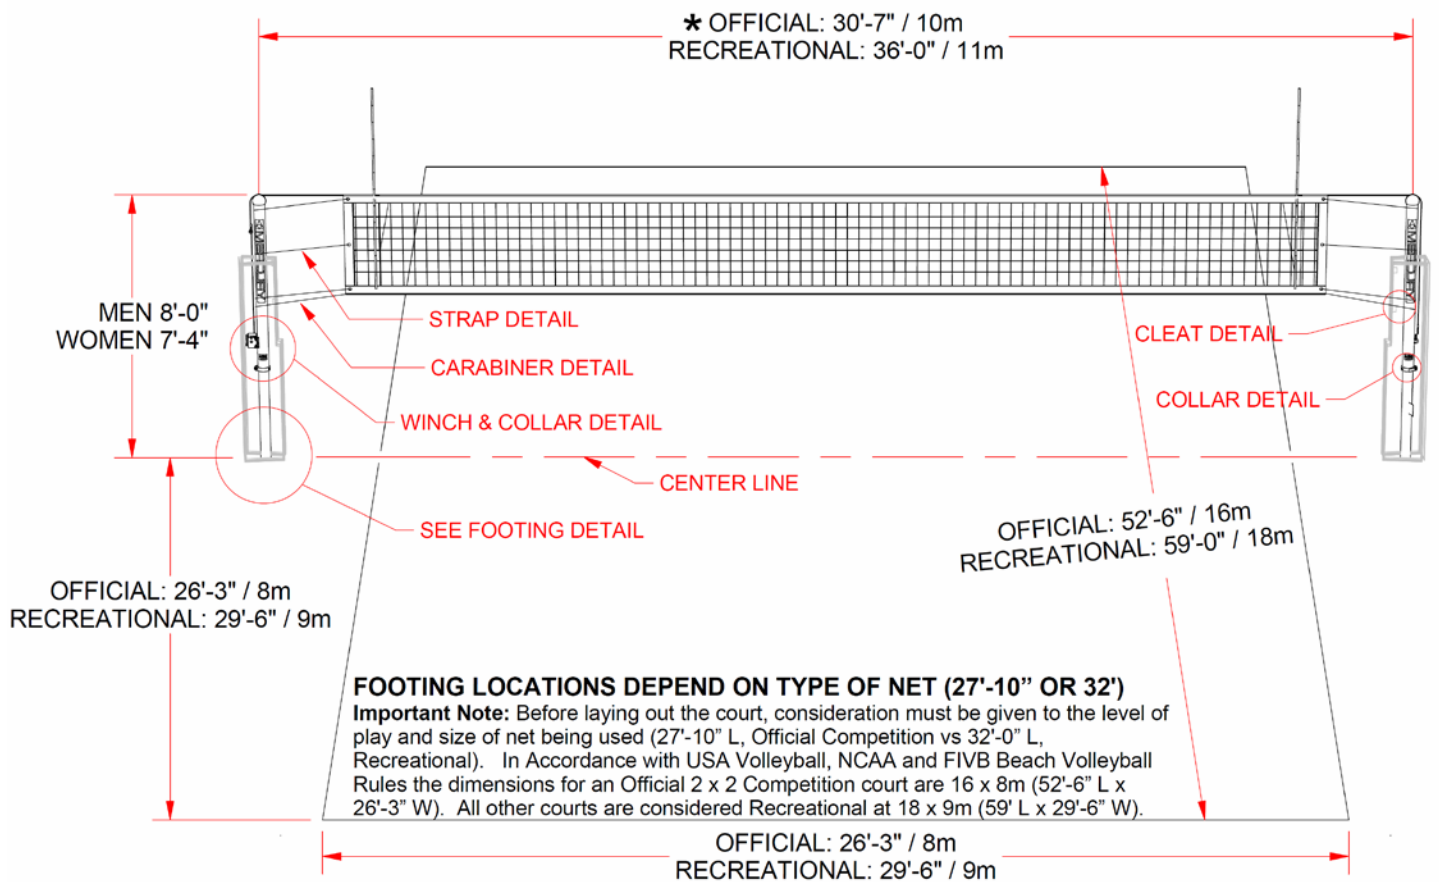

FOOTING DETAIL
(OPTIONAL ANCHOR KIT PN: OBV-100AK)

* FOR THE MOST VERSATILE FACILITY, ITS RECOMMENDED TO INSTALL POLES 36'-0" FROM EACH OTHER TO ALLOW FOR BOTH COMPETITION AND RECREATIONAL PLAY.