



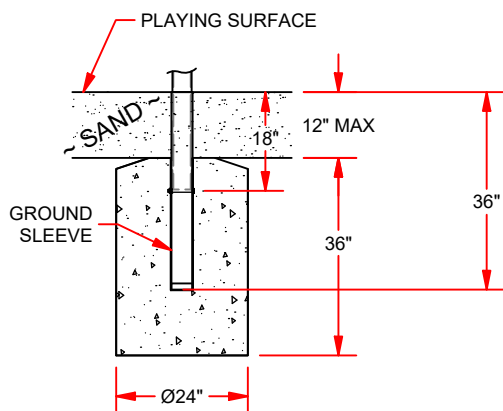


## OCV-900 ECONOMY 3-1/2" DIA. STEEL OUTDOOR VOLLEYBALL SYSTEM

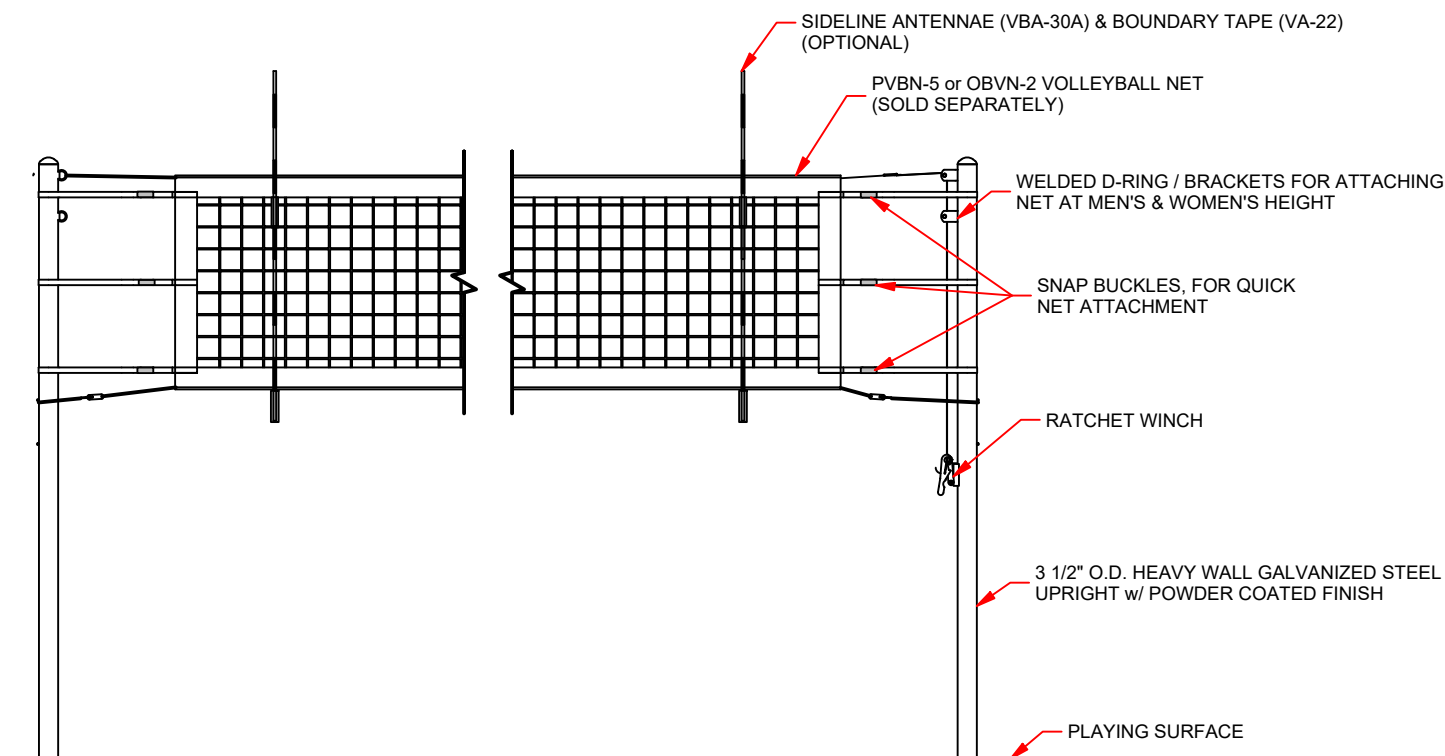

### SAND-FILLED FOOTING

\* DEPENDING ON SAND DEPTH  
(SHOWN ABOVE)

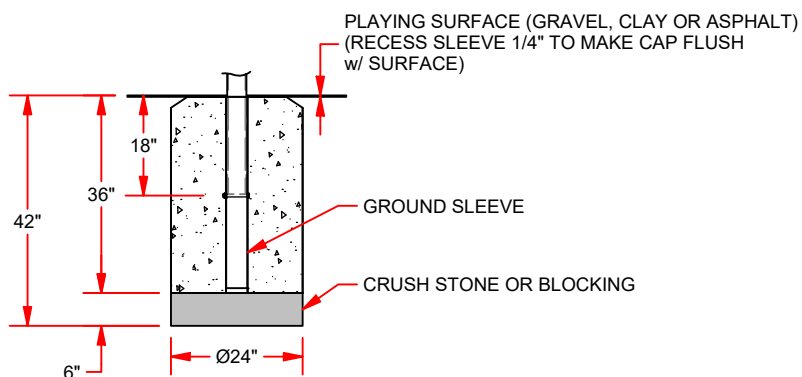


### NON-SAND FOOTING

(SHOWN ABOVE)

#### FEATURES:

- > 3-1/2" O.D. HEAVY WALL GALVANIZED STEEL UPRIGHTS
- > POWDER COATED ROYAL BLUE
- > FIXED HEIGHTS FOR MEN AND WOMEN'S PLAY.
- > RUST RESISTANT RATCHET AND 36" LONG ALUMINUM GROUND SLEEVES WITH COVER CAPS.
- > INCLUDES GROUND SLEEVES AND COVER.
- > NETS AVAILABLE SEPARATELY (PVBN-5 OR OBVN-2)
- > OPTIONAL CENTER PACKAGE AVAILABLE (OCV-900C).

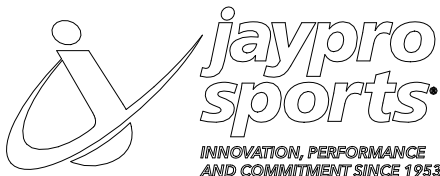

## OCV-900

ECONOMY 3-1/2" DIA. STEEL OUTDOOR  
VOLLEYBALL SYSTEM

© COPYRIGHT 2015 JAYPRO SPORTS, LLC. ALL RIGHTS RESERVED  
THIS PRINT IS THE PROPERTY OF JAYPRO SPORTS, LLC. AND MAY  
NOT BE REPRODUCED WITHOUT WRITTEN PERMISSION

www.jaypro.com  
(800) 243-0533  
976 Hartford Turnpike  
Waterford, CT 06385 USA

Sheet 1 of 2



## JAYPRO MODEL OCV-900

### 3 1/2" DIAMETER STEEL OUTDOOR VOLLEYBALL SYSTEM

The OCV-900 outdoor volleyball sleeve system is designed for use on multiple playing surfaces from grass, clay, gravel and asphalt to sand. Sand depth may vary up to 12" deep. Footing dimensions for sand will vary based on sand depth.

System shall consist of one winch upright and one anchor upright and shall be supplied with a tensioning winch and strap. Uprights are intended to fit snugly into 3.570" I.D. rigid aluminum x 40" deep ground sleeves. (Model No. OCV-900G)

Uprights shall provide men's and women's net height settings by means of twin welded roller tabs on the winch upright and twin welded "D"-rings on the anchor end. Uprights shall be constructed of 3 1/2" O.D. x .165" wall galvanized steel tubing.

Tensioning system shall consist of a ratchet-type winch and include an attached 2" high strength nylon web tensioning strap. All hardware shall be zinc-plated.