




www.gillathletics.com  
800-637-3090

## 728 - 2 Digit Display Stand Specifications

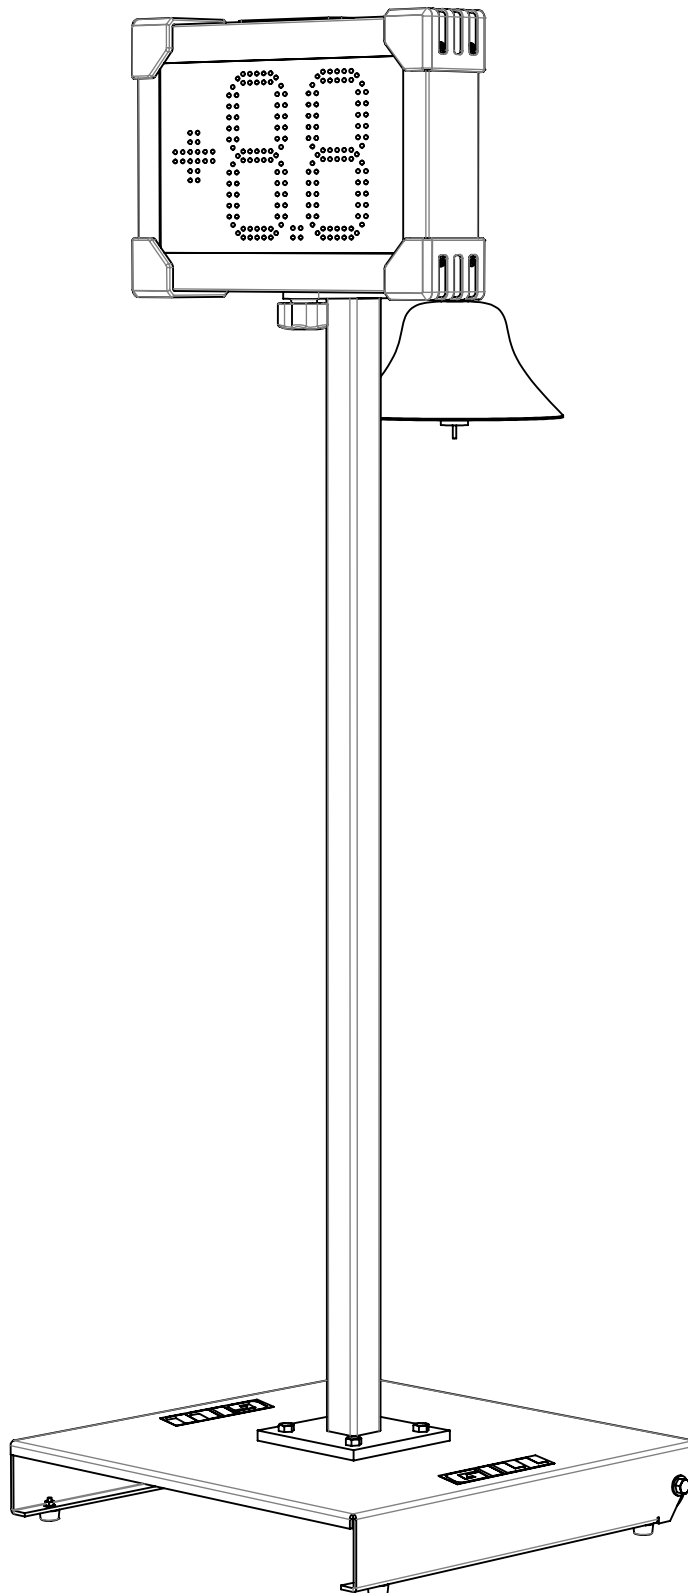

The display stand is 4'-10" tall with the 2 digit electronic display (sold separately)

The aluminum upright is powder coated black

The black powder coated steel base is 18" sq with tip and roll wheels

**Parts:**

700105 - 18" Steel Base

72820 - Upright Post & Bell

E49872 - 2 Digit Display (sold separately)

THIS WARNING IS GIVEN IN COMPLIANCE  
WITH CALIFORNIA'S PROPOSITION 65:

**WARNING**

This product contains chemicals known to the  
State of California to cause cancer, birth defects  
or other reproductive harm.




www.gillathletics.com  
800-637-3090

## 728 - 2 Digit Display Stand Specifications

#	Part #	Description	QTY.
1	72801	Display Upright	1
2	E49872	Electronic 2 Digit Display*	1
3	M2100	Bell and Gong	1
4	HAND00102	5/16"-18 x 1" Threaded Knob	1
5	M1232	5/16"-18 Nylock Hex Nut	1

\* Sold Separately

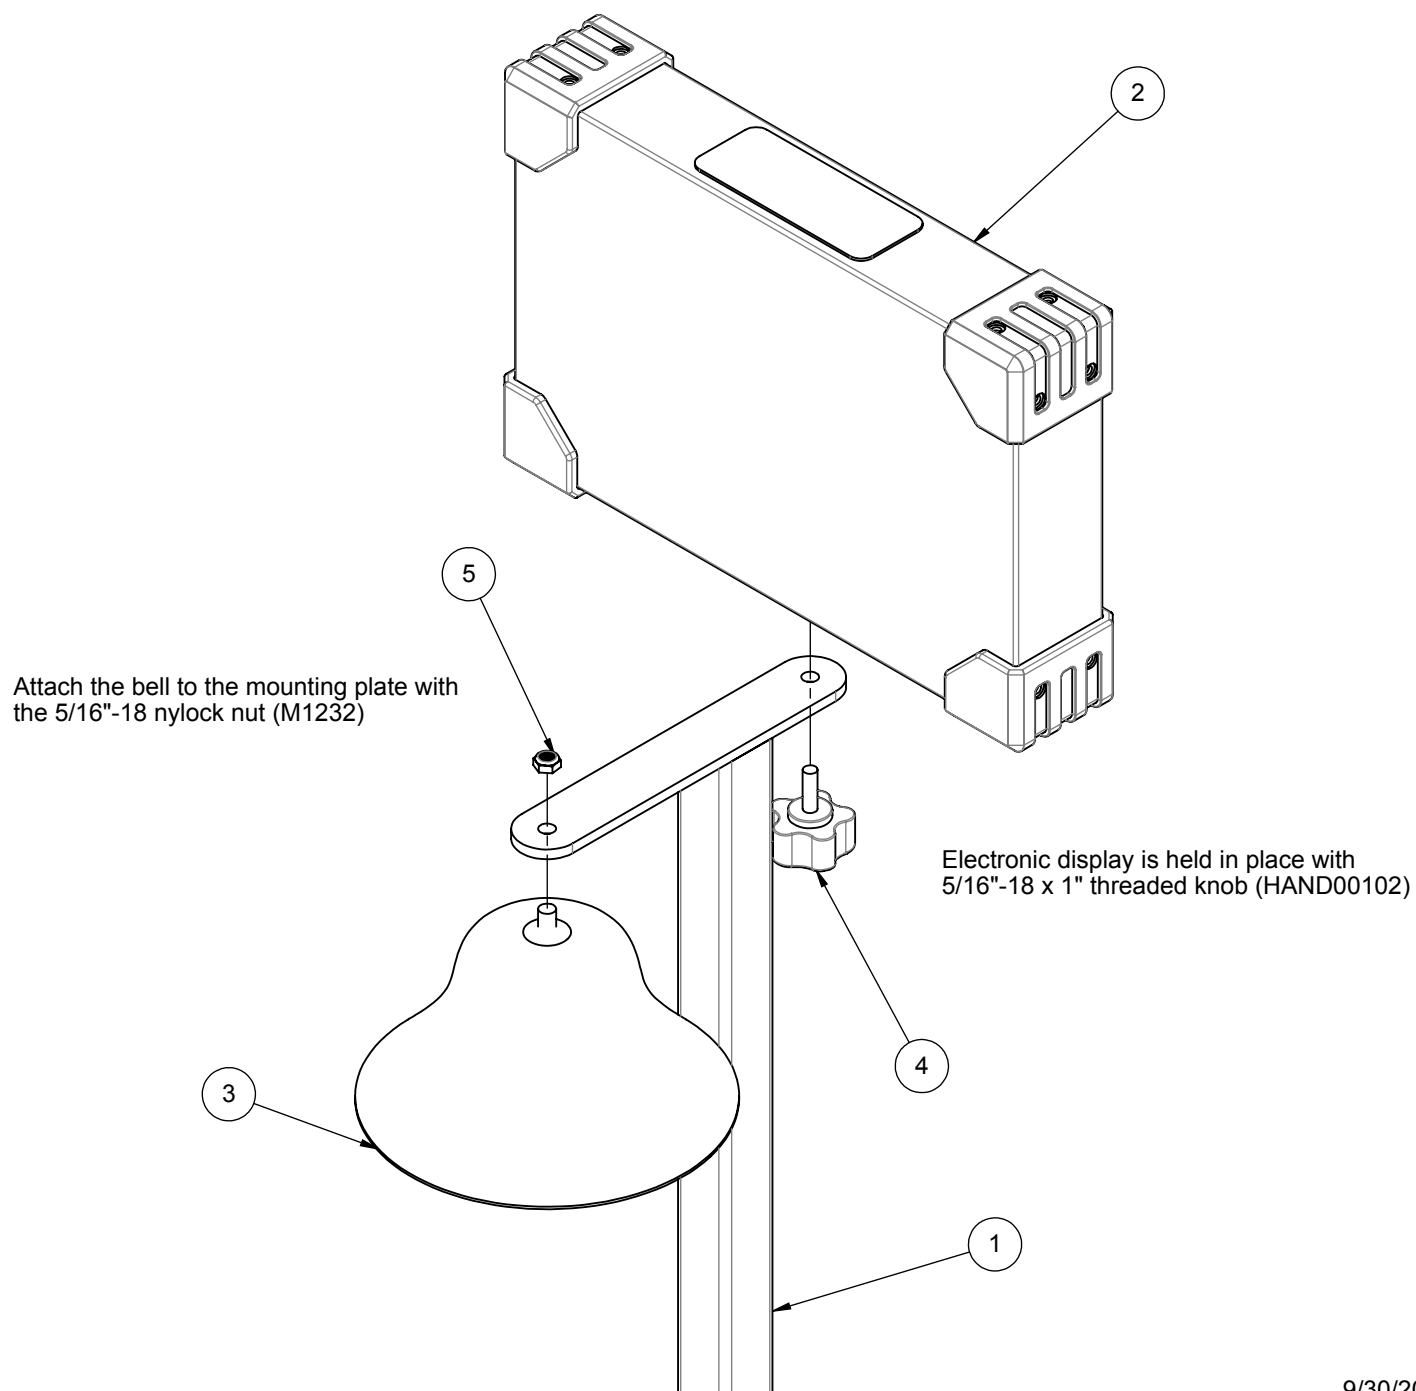



### Tools Required:

- (2) ½" Wrench  
(1) Flat Head Screwdriver


Assemble the base and fasten it to the upright as shown below.

**Do not over tighten the nylock nut that holds the skate wheel in place. The wheel must be able to spin.**

Check equipment for loose connections and re-tighten once per year.

Hardware:

- |      |       |  |
|------|-------|--|
| (4)  | M726  | Black Rubber Foot  |
| (4)  | M2229 | #6-32 x $\frac{5}{8}$ " Truss Head Screw                     |
| (4)  | M2228 | #6-32 Flange Whiz-nut  |
| (2)  | M718  | 61mm Skate Wheel   |
| (4)  | M717B | Bearing (2 per skate wheel)                                  |
| (2)  | M2834 | $\frac{5}{16}$ "-18 x 2" Full Thread Hex Bolt, Zinc Plated   |
| (4)  | M2207 | $\frac{5}{16}$ "-18 x $1\frac{1}{2}$ " Hex Bolt, Zinc-Plated |
| (8)  | M1254 | $\frac{5}{16}$ "-18 Nylock Hex Nut, Zinc-Plated              |
| (12) | M2273 | $\frac{5}{16}$ " Flat Washer, Zinc-Plated                    |

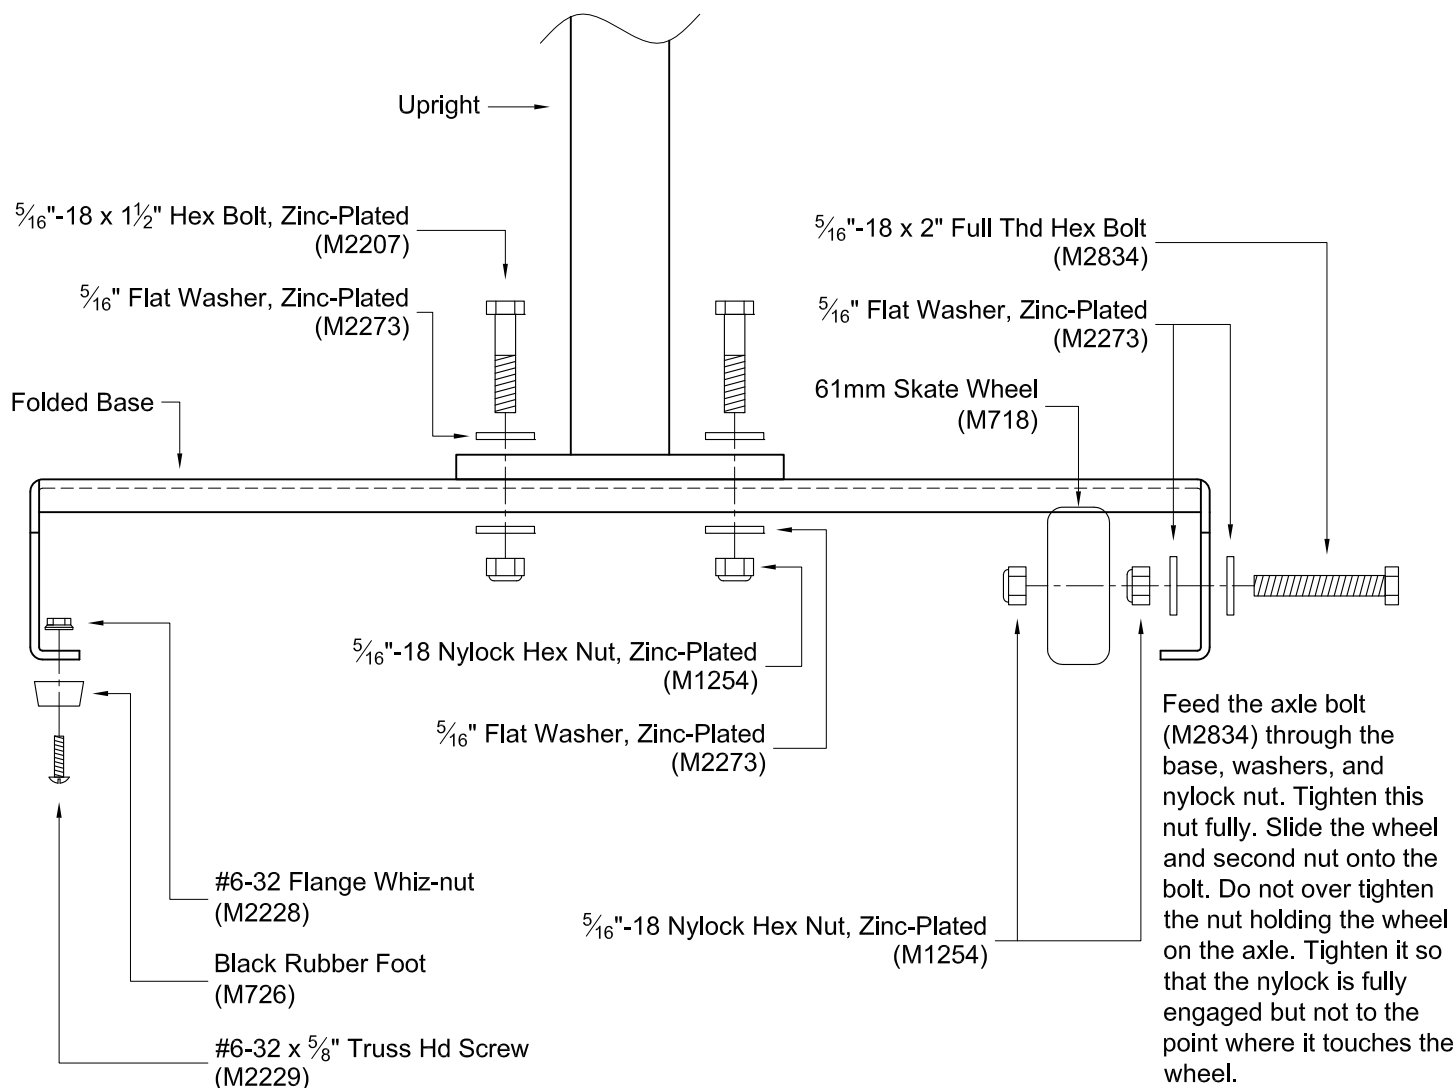

GILL ATH  
03/25/08  
7001 inst