

# VB76

Freestanding Folding Officials Platform



Customer Service  
(800) 247-7668

**Warning!**

- **The factory installed safety pin must be fully inserted and secured with the retaining wire prior to use. Check this connection each time the judges stand is used, failure to use the safety pin could cause judges platform to collapse causing serious injury.**
  - **Make are all safety padding is in place prior to play to reduce the chance of injuries.**
    - **Maximum allowable load is 250 pounds**

- ◆ Inspect all contents prior to installation. Report any missing parts to dealer immediately.
- ◆ Read all instructions before proceeding.

**PARTS LIST**

Item	Qty	Description	Item	Qty	Description
A	1	Front Frame	H	2	3/8" x 1 1/2" Hex Bolt
B	1	Ladder Frame	I	2	3/8" x 1" Hex Bolt
C	1	Platform	J	4	3/8" Lock Nut
D	2	Wheels	K	2	Plastic Washer
E	2	5/16" x 3" Hex Bolt	L	Set	VB75P Padding
F	2	5/16" Jam Nut	M	3	12" Slip Resistant Stair Tread Tape
G	2	5/16" Lock Nut			

1. Use the *3/8" X 1 1/2" Hex Bolts (H)*, *Plastic Washers (K)* and *3/8" Lock Nuts (J)* to attach *Ladder Frame (B)* to *Front Frame (A)* making sure *Plastic Washer (K)* is positioned between *Ladder Frame (B)* and *Front Frame (A)*. See Page 2, Figure 1.
2. Use the *3/8" X 1" Hex Bolts (I)* and *3/8" Lock Nuts (J)* to install *Platform (C)* to the *Front Frame (A)*. See Page 2, Figure 1.
3. Use the *5/16" X 3" Hex Bolts (E)*, *5/16" Jam Nuts (F)* and *5/16" Lock Nuts (G)* to attach *Wheels (D)* to *Ladder Frame (B)*. See Page 1, Figure 1.
4. Install *VB75P Padding Set (L)* by removing the vinyl wrap, install foam tubes around the judges stand and replacing vinyl wrap around the foam tubes using the sewn in Velcro to secure padding in place. See Page 2, Figure 2.
5. Install *12" Slip Resistant Stair Tread Tape (M)*, centered on each step on the ladder frame. See Page 2, Figure 1.

Figure 1

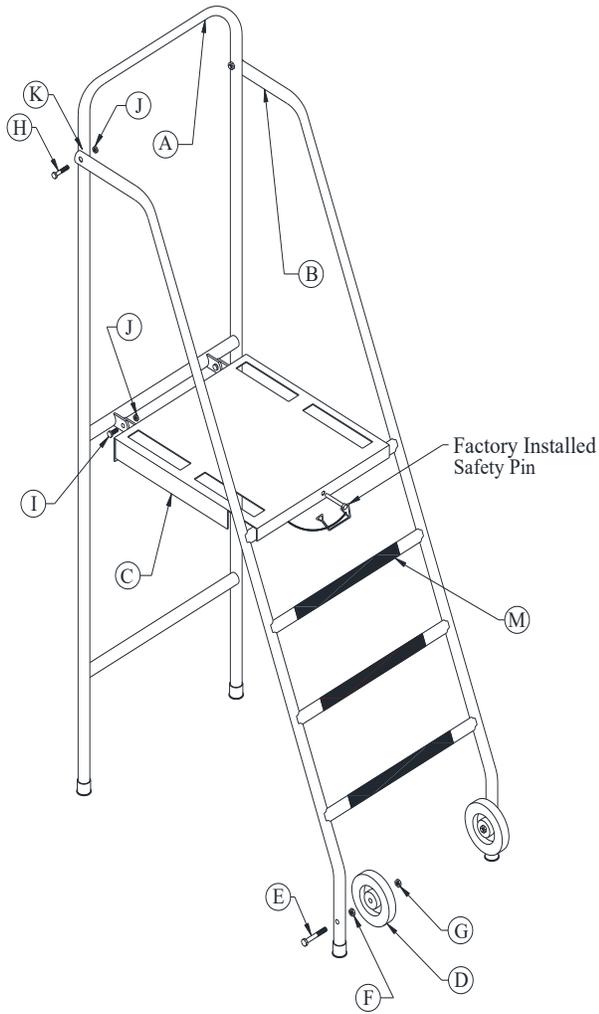


Figure 2

