



## ASSEMBLY INSTRUCTIONS FOR ALL 9B51 PORTABLE SHELTER FRAMES


**\*THIS UNIT MUST BE ASSEMBLED BY A MINIMUM OF TWO QUALIFIED PERSONS\***

**NOTICE** Sunlight reflecting off polycarbonate panels can contribute to increased temperatures of surrounding objects. In certain situations, these increased temperatures can damage some artificial turf surfaces. Kwik Goal is not responsible for any damage to artificial turf.



1. Unpack all parts and check for damage that may have occurred during shipping. If damage has occurred, notify Kwik Goal immediately. Lay out all parts. Remove all cardboard and packaging immediately. Wet or damp packaging may damage contents.
2. Read through entire instruction before beginning assembly and installation.

**NOTE:** Components may be packaged in one or more additional boxes.

### Parts

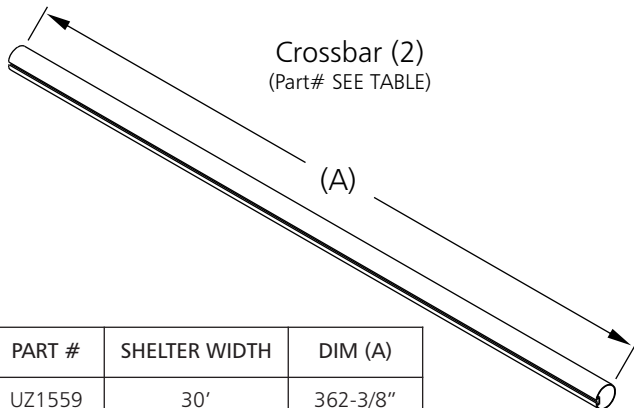

PART #	SHELTER WIDTH	DIM (A)
UZ1559	30'	362-3/8"
UZ1116	24'	287-3/4"
UZ1433	21'	250-7/16"
UZ1434	18'	213-1/8"
UZ1435	15'	175-13/16"
UZ1436	12'	138-1/2"
UZ1114	9'	101-3/16"

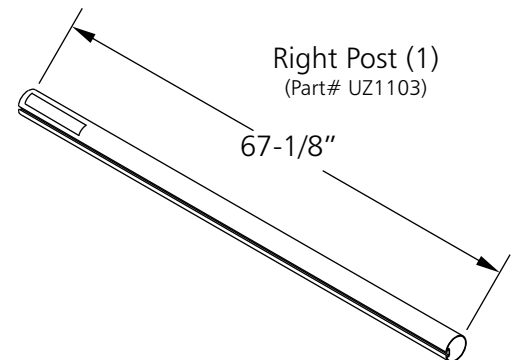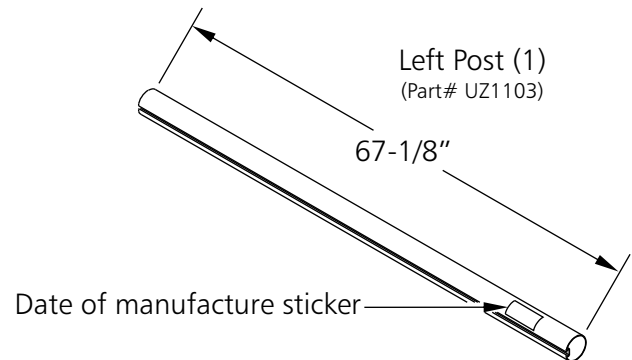

**THIS UNIT MUST BE ANCHORED ACCORDING TO THESE INSTRUCTIONS AT ALL TIMES**

### **⚠WARNING**

**THIS EQUIPMENT MUST BE STORED IN A SECURED, SHELTERED AREA WHEN NOT IN USE OR IN THE THREAT OF HIGH WINDS. ANY WEATHER DAMAGE TO THIS EQUIPMENT WILL NOT BE COVERED UNDER KWIK GOAL'S PRODUCT GUARANTEE. DO NOT LEAVE THIS EQUIPMENT UNATTENDED.**




**⚠ WARNING** **IMPORTANT SAFETY INSTRUCTIONS**  
**READ CAREFULLY**

1. Lifting and moving heavy field equipment can be dangerous if not done properly. All Kwik Goal shelters must be moved by qualified personnel who are experienced in moving large, heavy field equipment. Kwik Goal recommends storing dolly and wheels in a secured area to prevent unauthorized use.
2. A minimum of four qualified, experienced people are required to install wheels and move shelter.
3. Do not attempt to lift, move, or remove anchors from any shelter in windy conditions.
4. Shelters must not be left unattended when wheels are installed.
5. Shelter must be on level, flat ground to use dolly handle and/or wheels.
6. Dolly is to be used as a wheel transport/storage and shelter lifting device. Do not use dolly to move shelter.
7. Use extreme caution when pushing shelter. Excessive force can overturn shelter. Always push at lowest point on shelter frame possible.
8. Do not push shelter directly from the front to rear or rear to front. Push from end to end. (Refer to 9B1201 - Shelter Dolly instructions for details.)
9. Always use two people to lift shelter with dolly. With one person maintaining light pressure on the handle, the second may insert wheels into shelter. Install both wheels before resting shelter on the ground. (Refer to 9B1201 - Shelter Dolly instructions for details.)


**NEVER LOWER SHELTER WITH ONLY ONE WHEEL INSTALLED**

Parts Continued


Left Base (1)  
(Part# UZ1101)

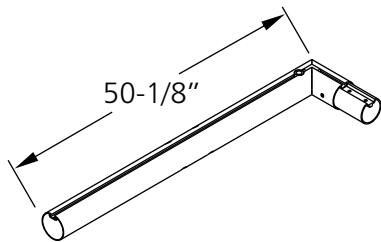


Right Base (1)  
(Part# UZ1102)




Left Panel (1)  
(Part# UZ1098)

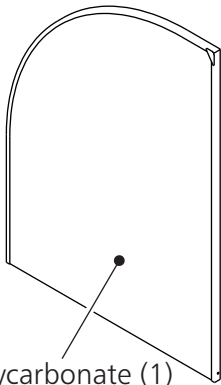

Right Panel (1)  
(Part# UZ1097)

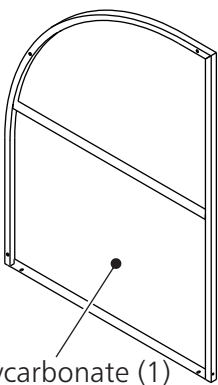

Center Panel (SEE TABLE)  
(Part# UZ1096)



SHELTER WIDTH	QTY
30'	10
24'	8
21'	7
18'	6
15'	5
12'	4
9'	3

Polycarbonate (1)  
(Part# WZ510)

Polycarbonate (1)  
(Part# WZ464)

Polycarbonate (1)  
(Part# WZ462)

Note: Hardware is packed separately in one or more boxes.  
Open all boxes and layout all sealed hardware packs  
before beginning assembly.

Frame Hdw (Part# JZ131)

- 3/8" X 1" Socket Head (Part# TZ323) (20)
- 3/8" Lock Washer (Part# TZ65) (20)


Lift Hdw (Part# JZ137)

- 1/2" U-bolt (Part# TZ306) (2)
- 1/2" Lock Nut (Part# TZ28) (4)
- 1/2" Flat Washer (Part# TZ297) (4)


Anchor Hdw (Part# JZ210)

- 7/16" X 5" Hex Bolt (Part# TZ307) (4)
- 7/16" X 5-1/2" Hex Bolt (Part# TZ291) (4)
- 7/16" Lock Nut (Part# TZ47) (4)
- 7/16" Flat Washer (Part# TZ171) (8)
- Anchor Chain (Part# VZ564-12) (4)


Ground Anchor (4)  
(Part# 10B103 Pack of 4)




Anchor Bracket (8)  
(Part# UZ1430)



Crossbar Corner (2)  
(Part# UZ1211)



Post Corner (2)  
(Part# UZ1099)



**THIS UNIT MUST BE ANCHORED ACCORDING TO THESE INSTRUCTIONS AT ALL TIMES**

**⚠WARNING**


THIS EQUIPMENT MUST BE STORED IN A SECURED, SHELTERED AREA WHEN NOT IN USE OR IN THE THREAT OF HIGH WINDS. ANY WEATHER DAMAGE TO THIS EQUIPMENT WILL NOT BE COVERED UNDER KWIK GOAL'S PRODUCT GUARANTEE. DO NOT LEAVE THIS EQUIPMENT UNATTENDED.

### Quantity per shelter length


Panel Hdw (Part# JZ199, JZ202)	9ft	12ft	15ft	18ft	21ft	24ft	30ft
3/8" X 7/8" Hex Bolt (Part# TZ249)	(5)	(6)	(7)	(8)	(9)	(10)	(12)
3/8" X 2-1/4" Hex Bolt (Part# TZ305)	(7)	(8)	(9)	(10)	(11)	(12)	(14)
3/8" Square Nut (Part# TZ247)	(12)	(14)	(16)	(18)	(20)	(22)	(26)
3/8" Lock Washer (Part# TZ65)	(32)	(34)	(36)	(38)	(40)	(42)	(46)
3/8" Flat Washer (Part# TZ60)	(12)	(14)	(16)	(18)	(20)	(22)	(26)
5/16" X 3-3/4" Hex Bolt (Part# TZ264)	(6)	(9)	(12)	(15)	(18)	(21)	(27)
5/16" Lock Nut (Part# TZ5)	(12)	(15)	(18)	(21)	(24)	(27)	(33)
5/16" Flat Washer (Part# TZ4)	(18)	(24)	(30)	(36)	(42)	(48)	(60)

### Assembly Tools


Polyurethane Sealant  
(Part# VZ837)



1/2", 9/16", 5/8" & 3/4"  
Wrenches



Ratchet with  
1/2", 9/16", 5/8" & 3/4"  
Sockets





5/16" Hex wrench



3. Hardware for this step is in Lift Hdw pack.  
Attach 1/2" U-bolt to left and right bases.

**NOTE: Tighten 1/2" nuts only until flush with end of U-bolts.**

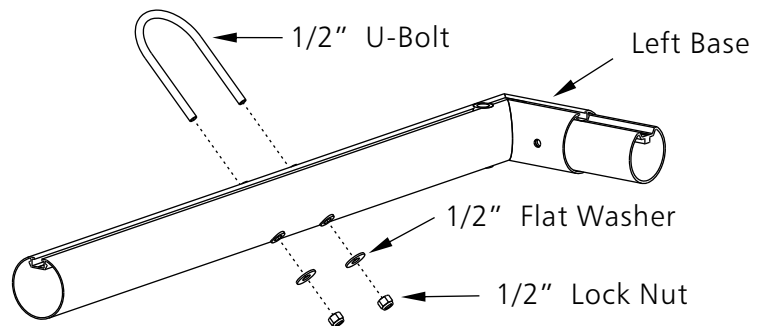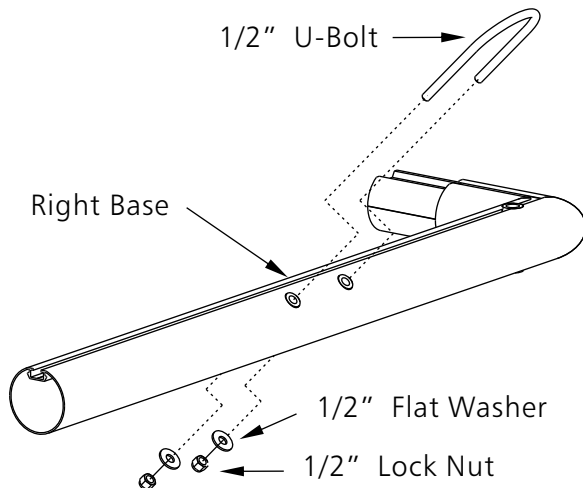

**THIS UNIT MUST BE ANCHORED ACCORDING TO THESE INSTRUCTIONS AT ALL TIMES**


### ⚠ WARNING

THIS EQUIPMENT MUST BE STORED IN A SECURED, SHELTERED AREA WHEN NOT IN USE OR IN THE THREAT OF HIGH WINDS. ANY WEATHER DAMAGE TO THIS EQUIPMENT WILL NOT BE COVERED UNDER KWIK GOAL'S PRODUCT GUARANTEE. DO NOT LEAVE THIS EQUIPMENT UNATTENDED.

4. Hardware for this step is in **Frame Hdw** & **Panel Hdw** packs.

Assemble crossbar, bases, and post corners. Press joints together firmly before tightening bolts.

**NOTE:** Square nuts will float loose in channels until used later.

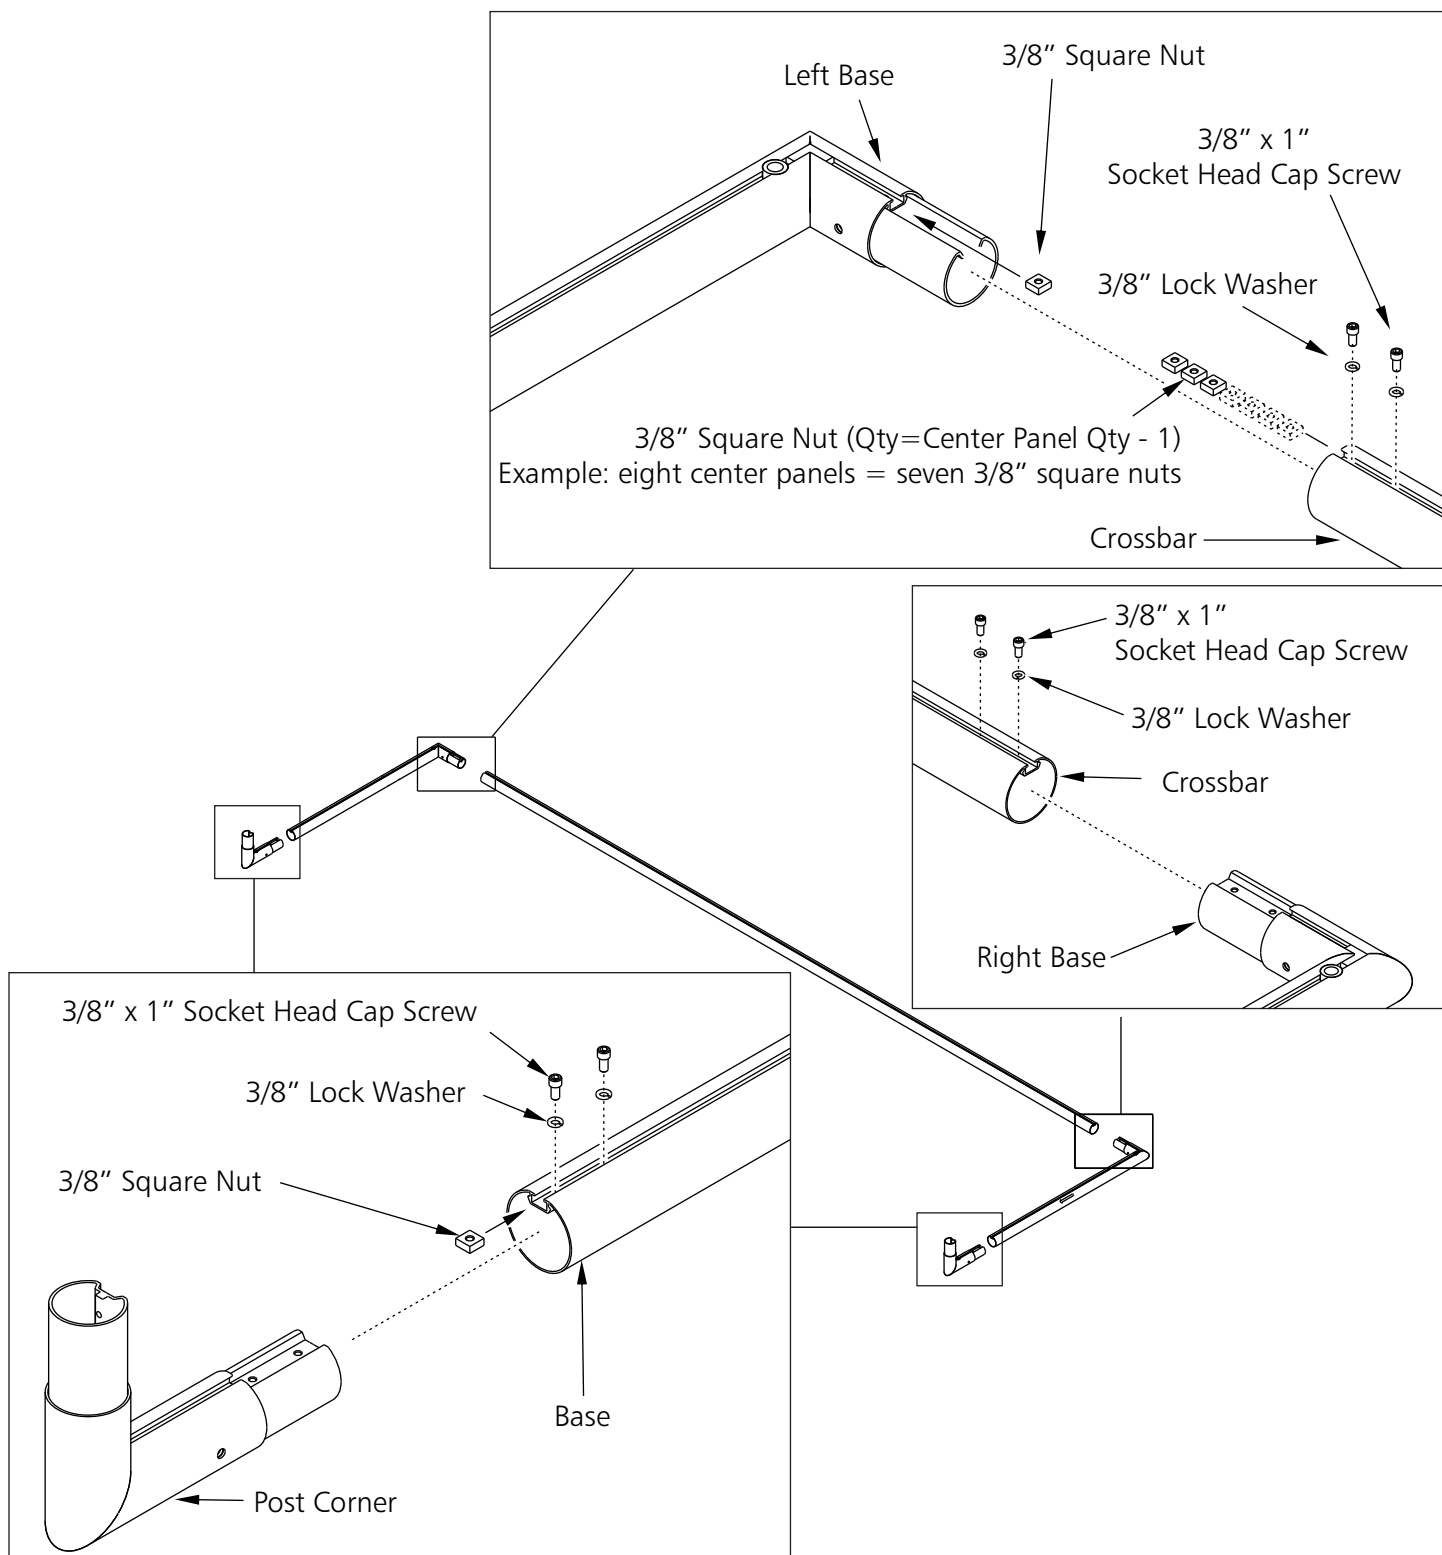

**THIS UNIT MUST BE ANCHORED ACCORDING TO THESE INSTRUCTIONS AT ALL TIMES**


**⚠ WARNING**

THIS EQUIPMENT MUST BE STORED IN A SECURED, SHELTERED AREA WHEN NOT IN USE OR IN THE THREAT OF HIGH WINDS. ANY WEATHER DAMAGE TO THIS EQUIPMENT WILL NOT BE COVERED UNDER KWIK GOAL'S PRODUCT GUARANTEE. DO NOT LEAVE THIS EQUIPMENT UNATTENDED.

5. Hardware for this step is in **Frame Hdw** & **Panel Hdw** packs.

Assemble crossbar, posts, and crossbar corners. Press joints together firmly before tightening bolts.

**NOTE:** Square nuts will float loose in channels until used later.

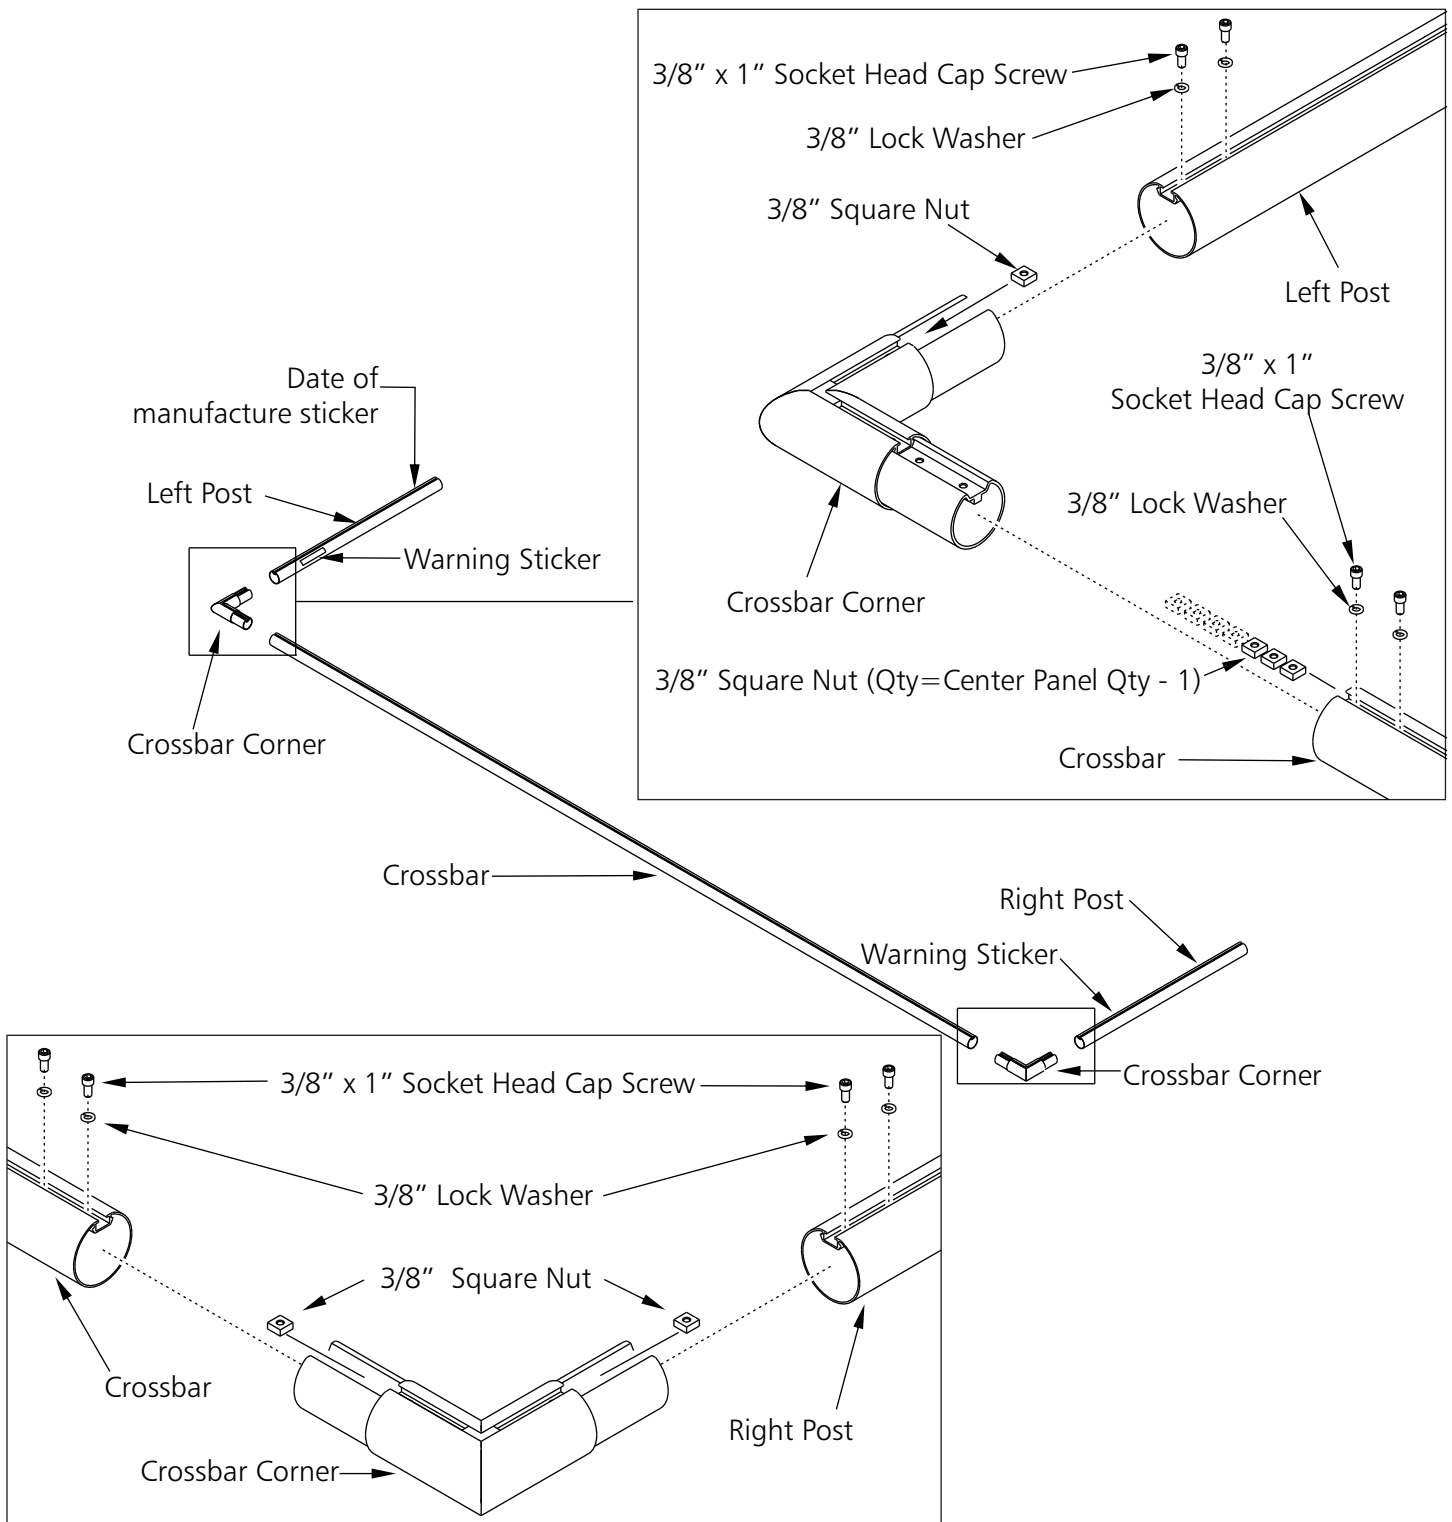


**THIS UNIT MUST BE ANCHORED ACCORDING TO THESE INSTRUCTIONS AT ALL TIMES**

**⚠ WARNING**

THIS EQUIPMENT MUST BE STORED IN A SECURED, SHELTERED AREA WHEN NOT IN USE OR IN THE THREAT OF HIGH WINDS. ANY WEATHER DAMAGE TO THIS EQUIPMENT WILL NOT BE COVERED UNDER KWIK GOAL'S PRODUCT GUARANTEE. DO NOT LEAVE THIS EQUIPMENT UNATTENDED.

6. Hardware for this step is in **Frame Hdw** & **Panel Hdw** packs.  
Insert one 3/8" square nut in each side of assembled base corner. Connect assembled base and post as shown.  
Press joints together firmly before tightening bolts.




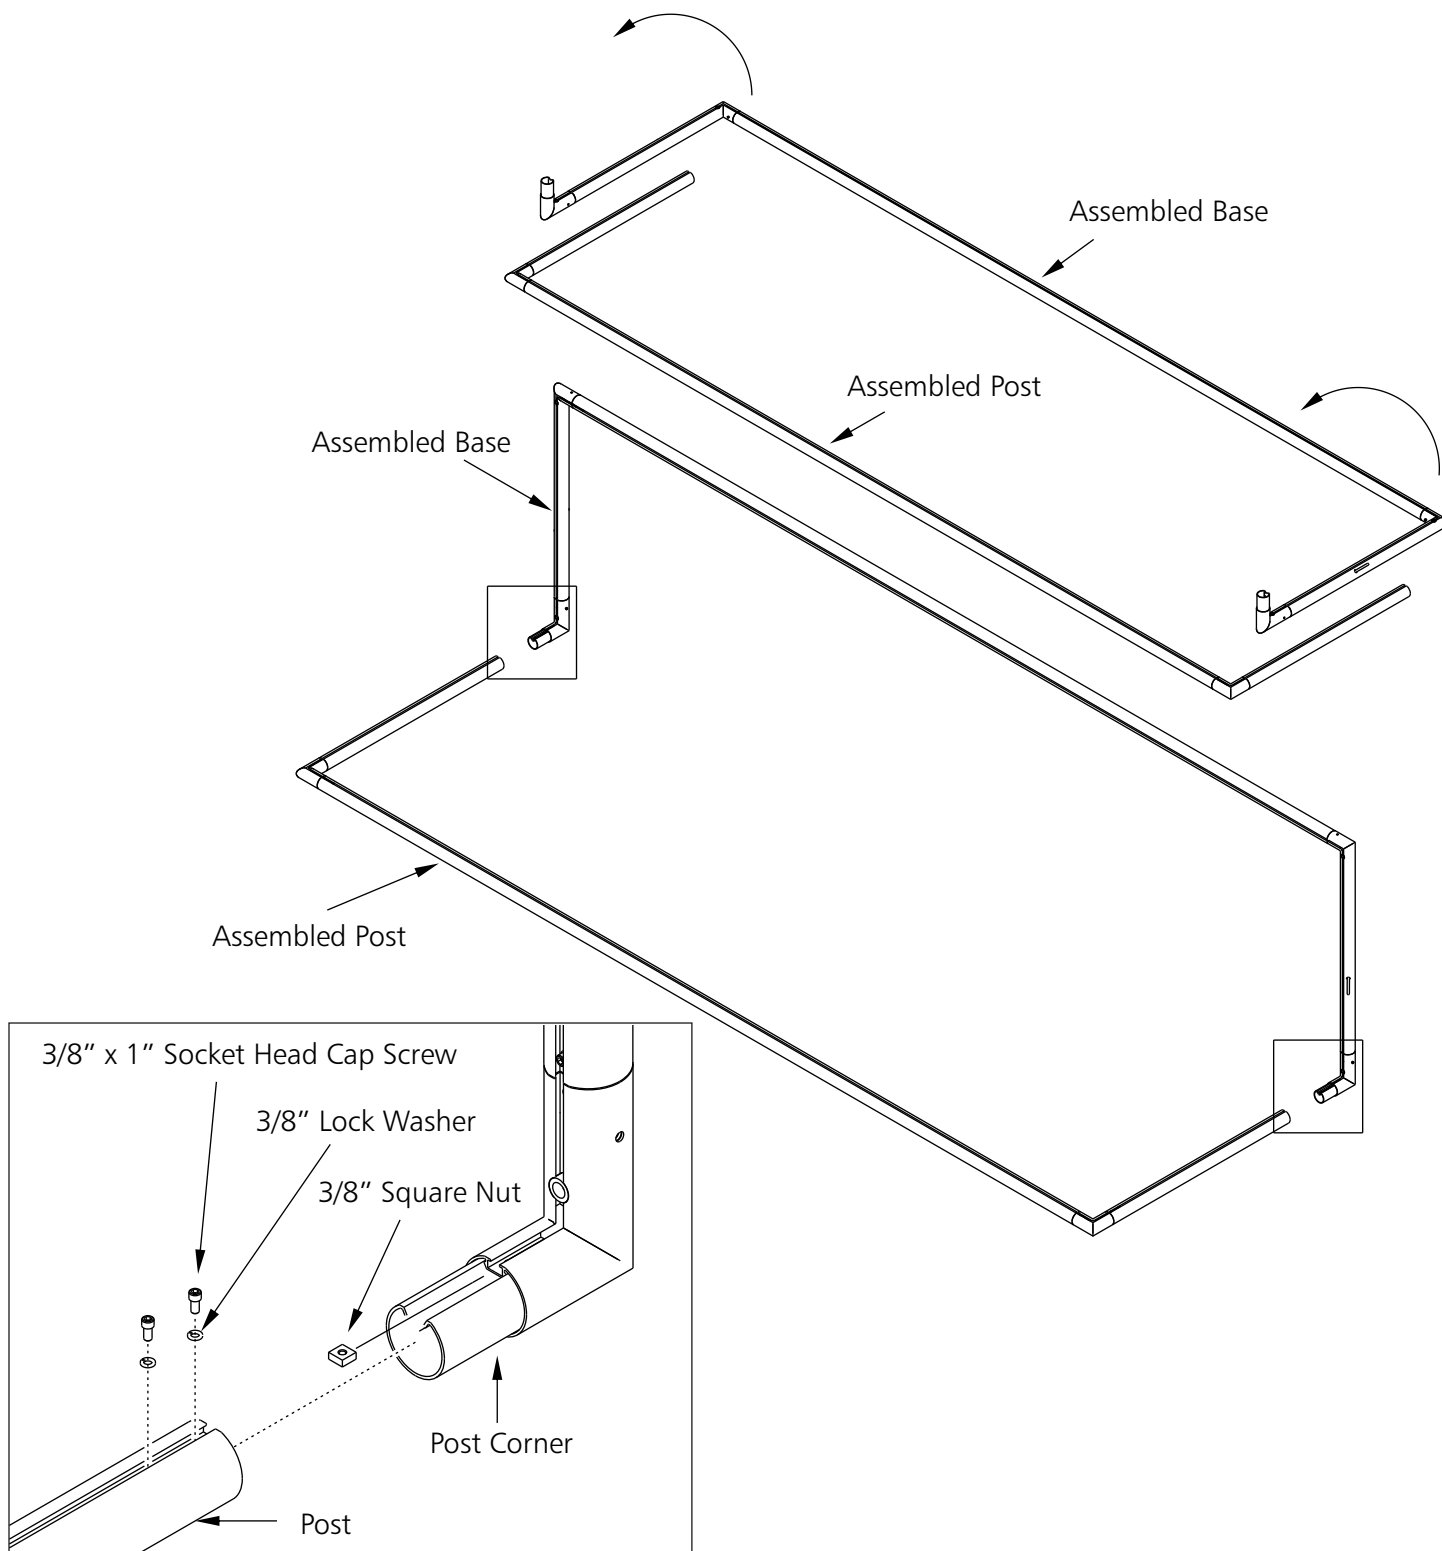


**THIS UNIT MUST BE ANCHORED ACCORDING TO THESE INSTRUCTIONS AT ALL TIMES**

**⚠WARNING**

THIS EQUIPMENT MUST BE STORED IN A SECURED, SHELTERED AREA WHEN NOT IN USE OR IN THE THREAT OF HIGH WINDS. ANY WEATHER DAMAGE TO THIS EQUIPMENT WILL NOT BE COVERED UNDER KWIK GOAL'S PRODUCT GUARANTEE. DO NOT LEAVE THIS EQUIPMENT UNATTENDED.

7. Hardware for this step is in **Panel Hdw** packs.  
Attach right and left panels to assembled frame as shown.  
**Do NOT tighten bolts at this time.**

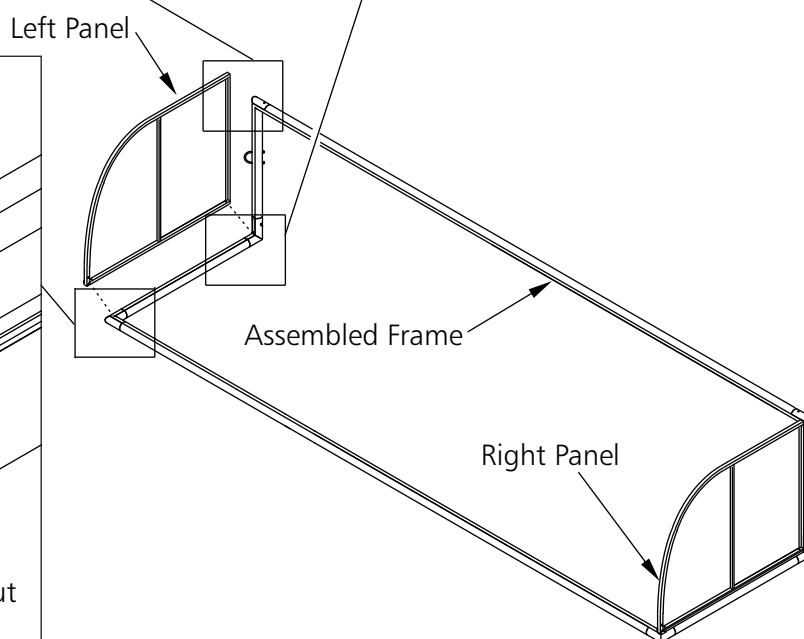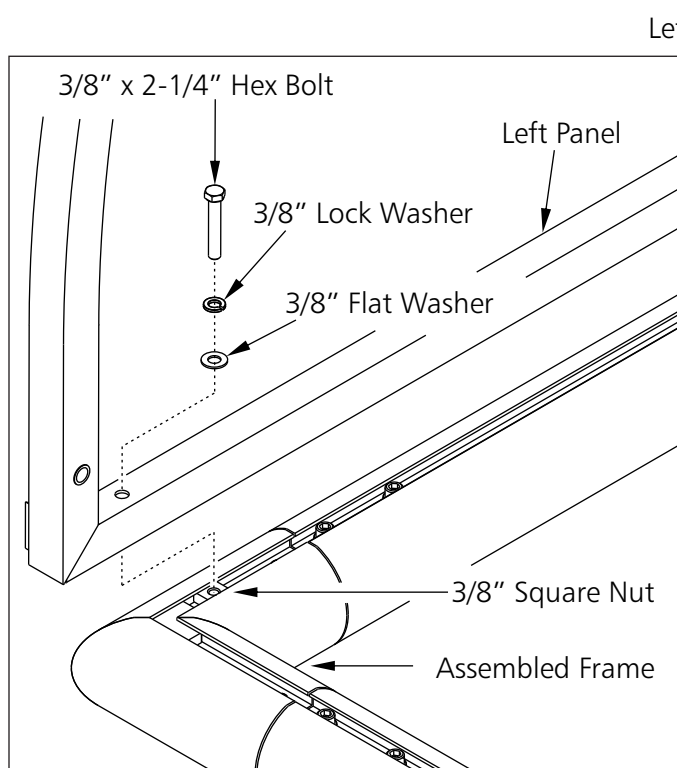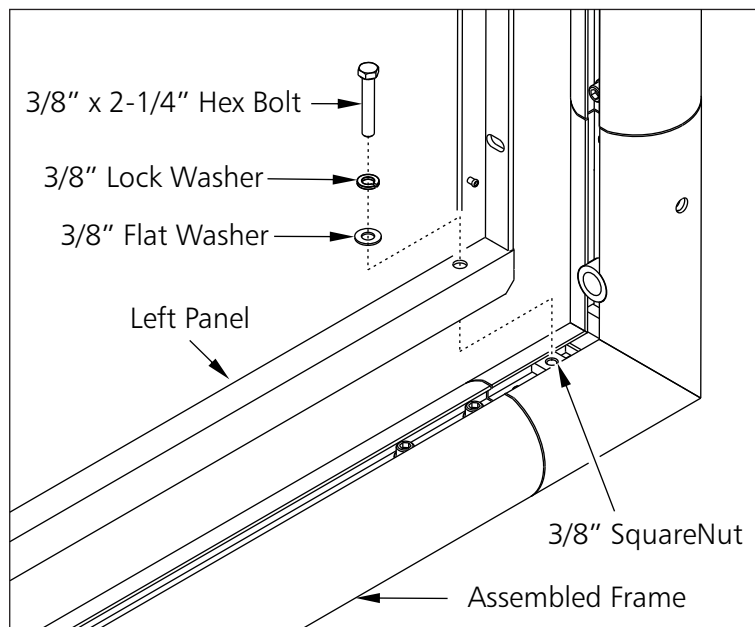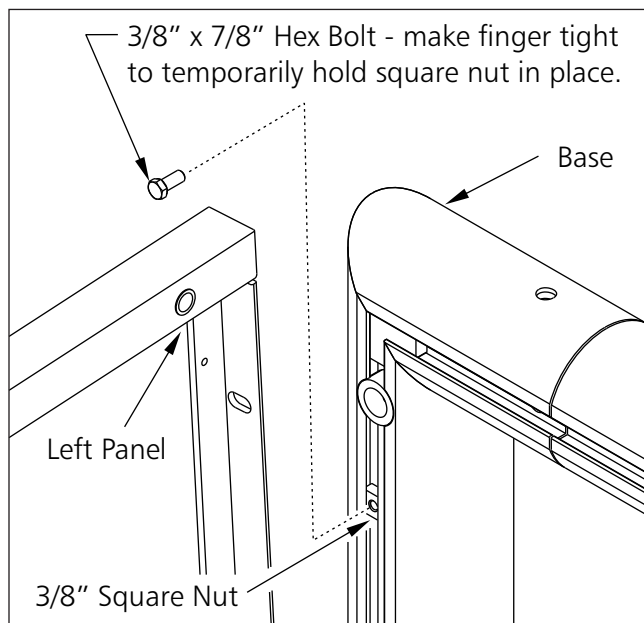


**THIS UNIT MUST BE ANCHORED ACCORDING TO THESE INSTRUCTIONS AT ALL TIMES**

**⚠WARNING**

THIS EQUIPMENT MUST BE STORED IN A SECURED, SHELTERED AREA WHEN NOT IN USE OR IN THE THREAT OF HIGH WINDS. ANY WEATHER DAMAGE TO THIS EQUIPMENT WILL NOT BE COVERED UNDER KWIK GOAL'S PRODUCT GUARANTEE. DO NOT LEAVE THIS EQUIPMENT UNATTENDED.



8. Turn shelter frame onto base and remove temporary 3/8" X 7/8" bolt then connect bottom of right and left panel as shown.  
Do NOT tighten bolts at this time.

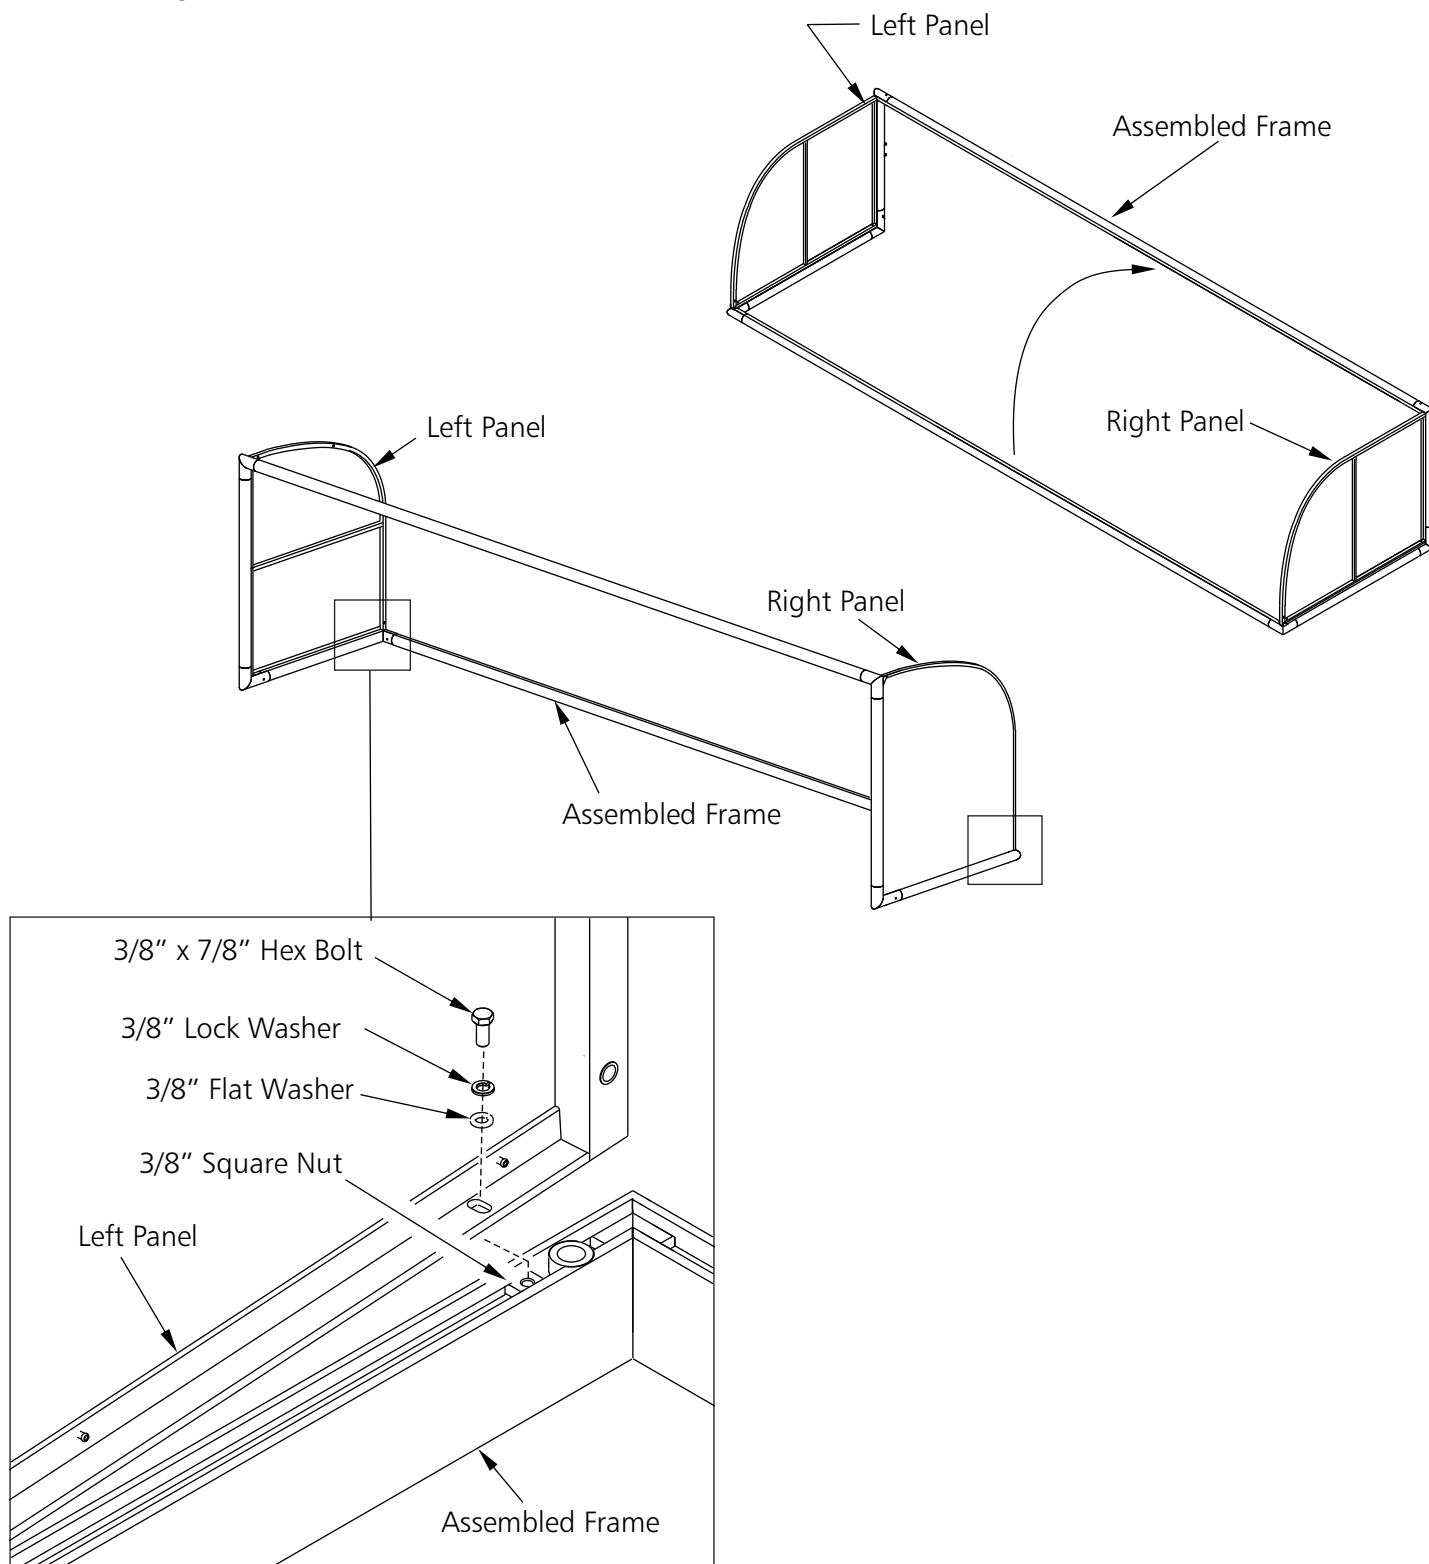

**THIS UNIT MUST BE ANCHORED ACCORDING TO THESE INSTRUCTIONS AT ALL TIMES**


**⚠WARNING**

THIS EQUIPMENT MUST BE STORED IN A SECURED, SHELTERED AREA WHEN NOT IN USE OR IN THE THREAT OF HIGH WINDS. ANY WEATHER DAMAGE TO THIS EQUIPMENT WILL NOT BE COVERED UNDER KWIK GOAL'S PRODUCT GUARANTEE. DO NOT LEAVE THIS EQUIPMENT UNATTENDED.

9. Hardware for this step is in **Panel Hdw** packs.

Insert double end studs into left panel. Move unneeded square nuts in top and bottom crossbars away from left side at least one center panel width.

**Do NOT tighten bolts at this time.**

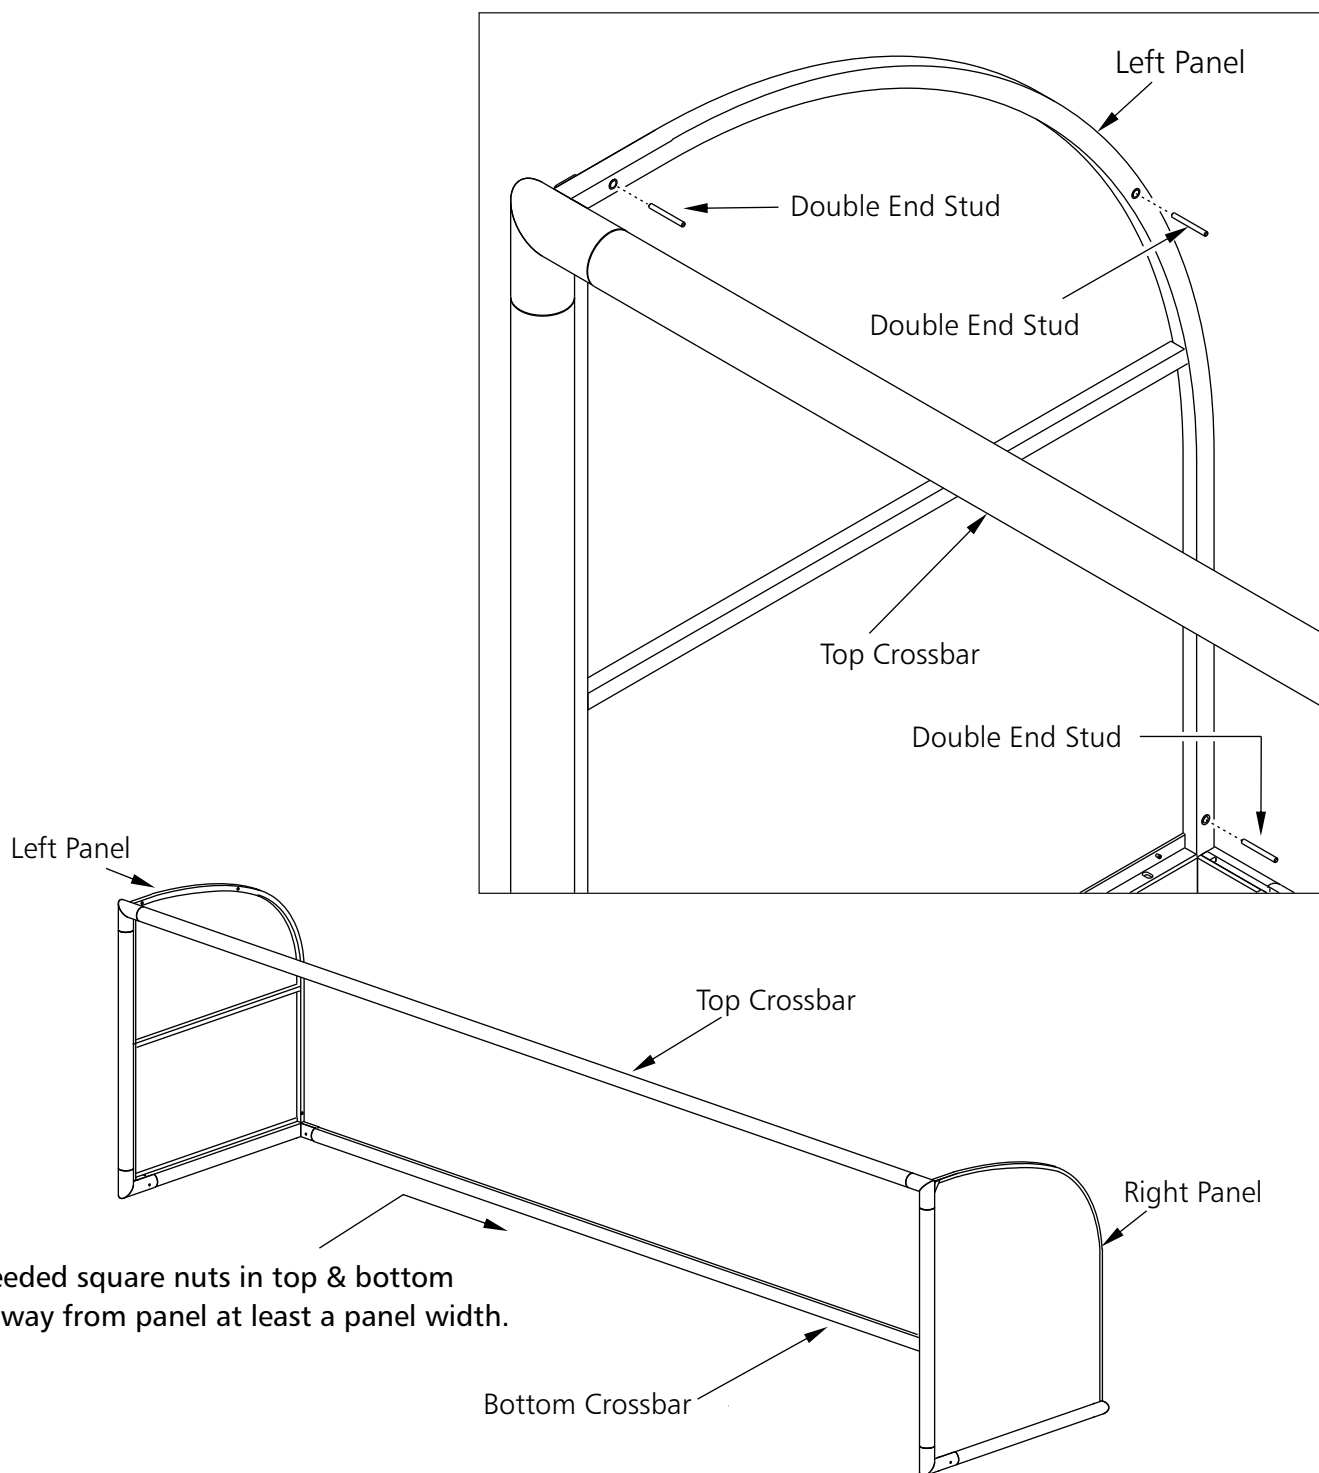

**THIS UNIT MUST BE ANCHORED ACCORDING TO THESE INSTRUCTIONS AT ALL TIMES**


**⚠ WARNING**

THIS EQUIPMENT MUST BE STORED IN A SECURED, SHELTERED AREA WHEN NOT IN USE OR IN THE THREAT OF HIGH WINDS. ANY WEATHER DAMAGE TO THIS EQUIPMENT WILL NOT BE COVERED UNDER KWIK GOAL'S PRODUCT GUARANTEE. DO NOT LEAVE THIS EQUIPMENT UNATTENDED.

10. Hardware for this step is in **Panel Hdw** packs.

Line up square nut with holes in center panel and attach center panel to shelter frame. Slide center panel to mate with left panel lining up double end studs, as shown. Repeat steps 9 & 10 to attach center panel to the right side.

**Do NOT tighten bolts at this time.**

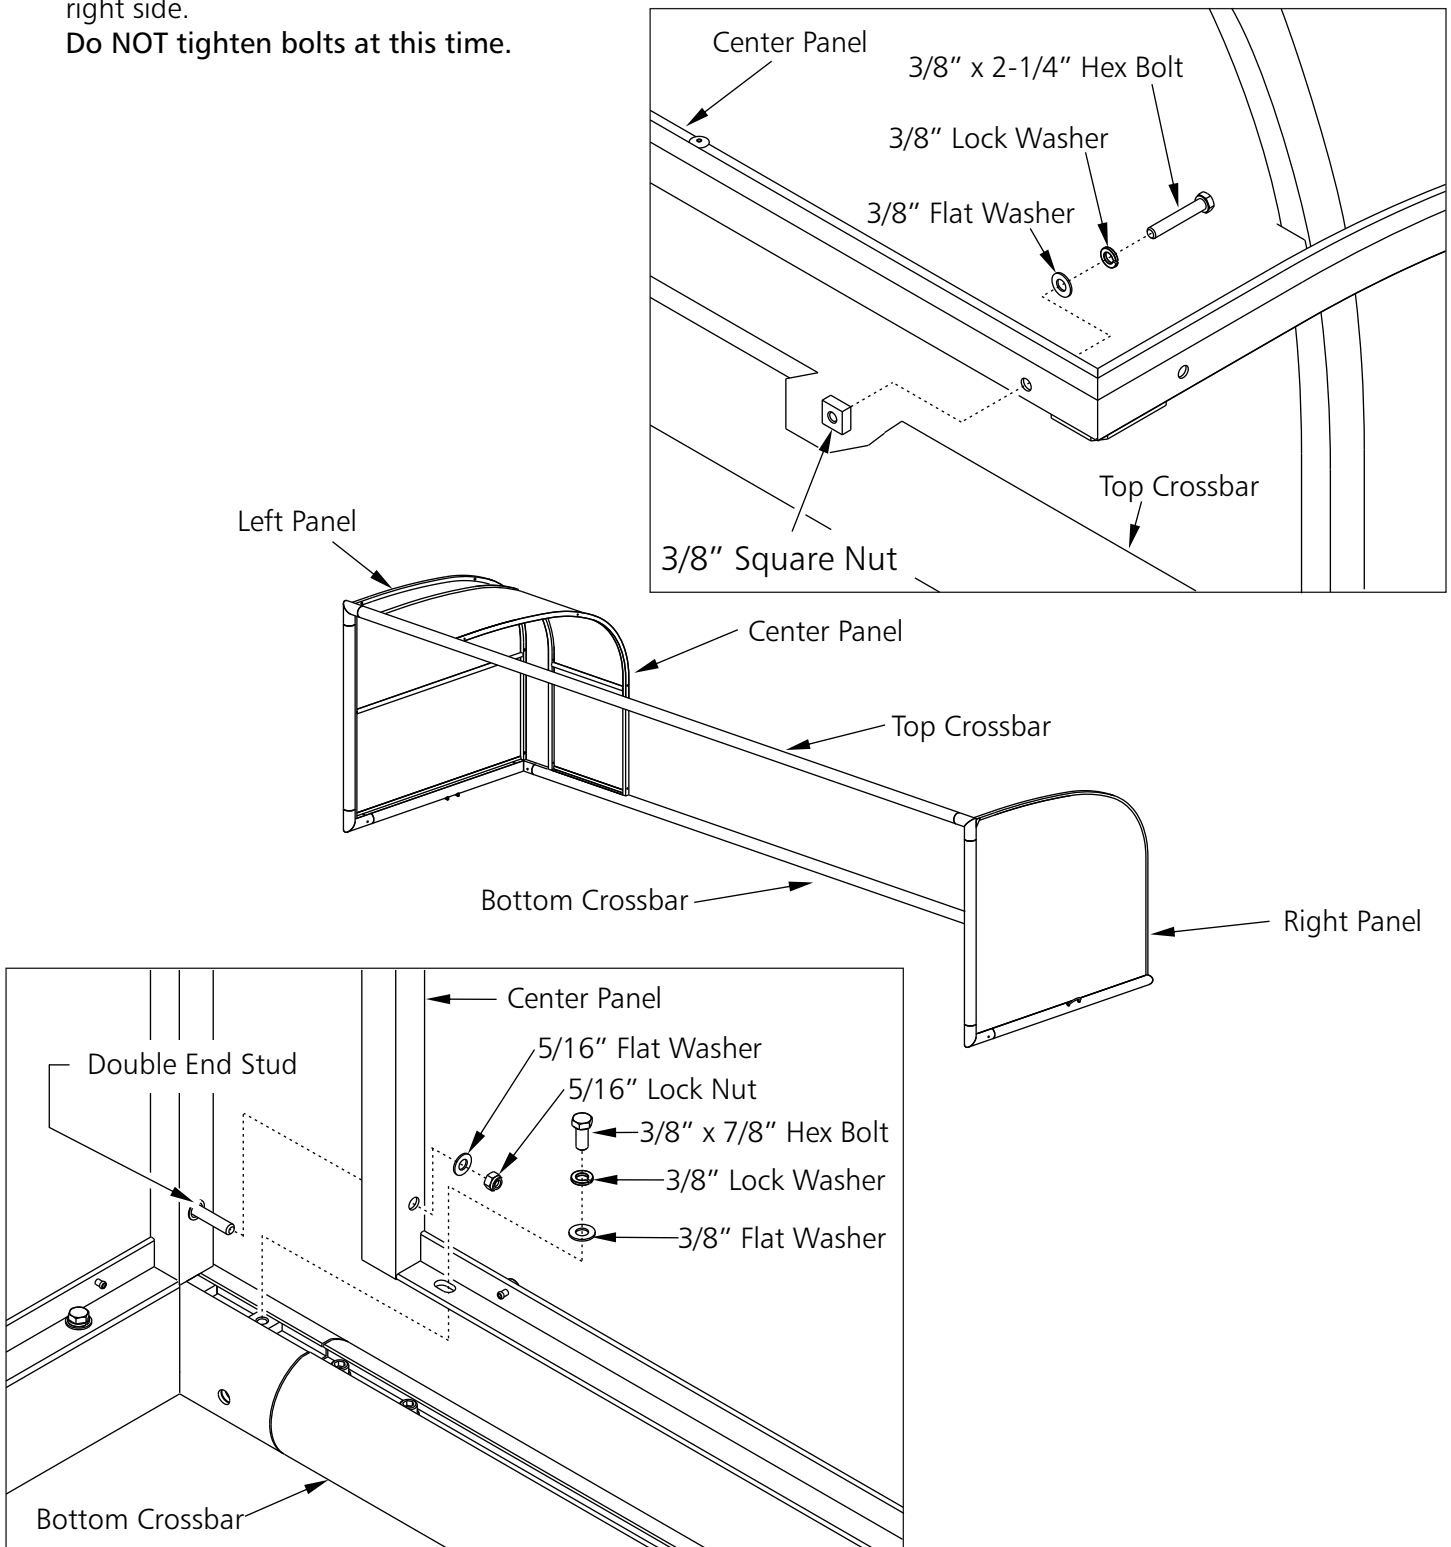


**THIS UNIT MUST BE ANCHORED ACCORDING TO THESE INSTRUCTIONS AT ALL TIMES**

**⚠WARNING**

THIS EQUIPMENT MUST BE STORED IN A SECURED, SHELTERED AREA WHEN NOT IN USE OR IN THE THREAT OF HIGH WINDS. ANY WEATHER DAMAGE TO THIS EQUIPMENT WILL NOT BE COVERED UNDER KWIK GOAL'S PRODUCT GUARANTEE. DO NOT LEAVE THIS EQUIPMENT UNATTENDED.

11. Hardware for this step is in **Panel Hdw** packs.

Repeat step 10 to attach center panels to crossbars then connect center panels together until the only 1 center panel is left. Remember to move unneeded square nuts on top and bottom crossbars out from under the center panel being attached before bolting center panel in place.

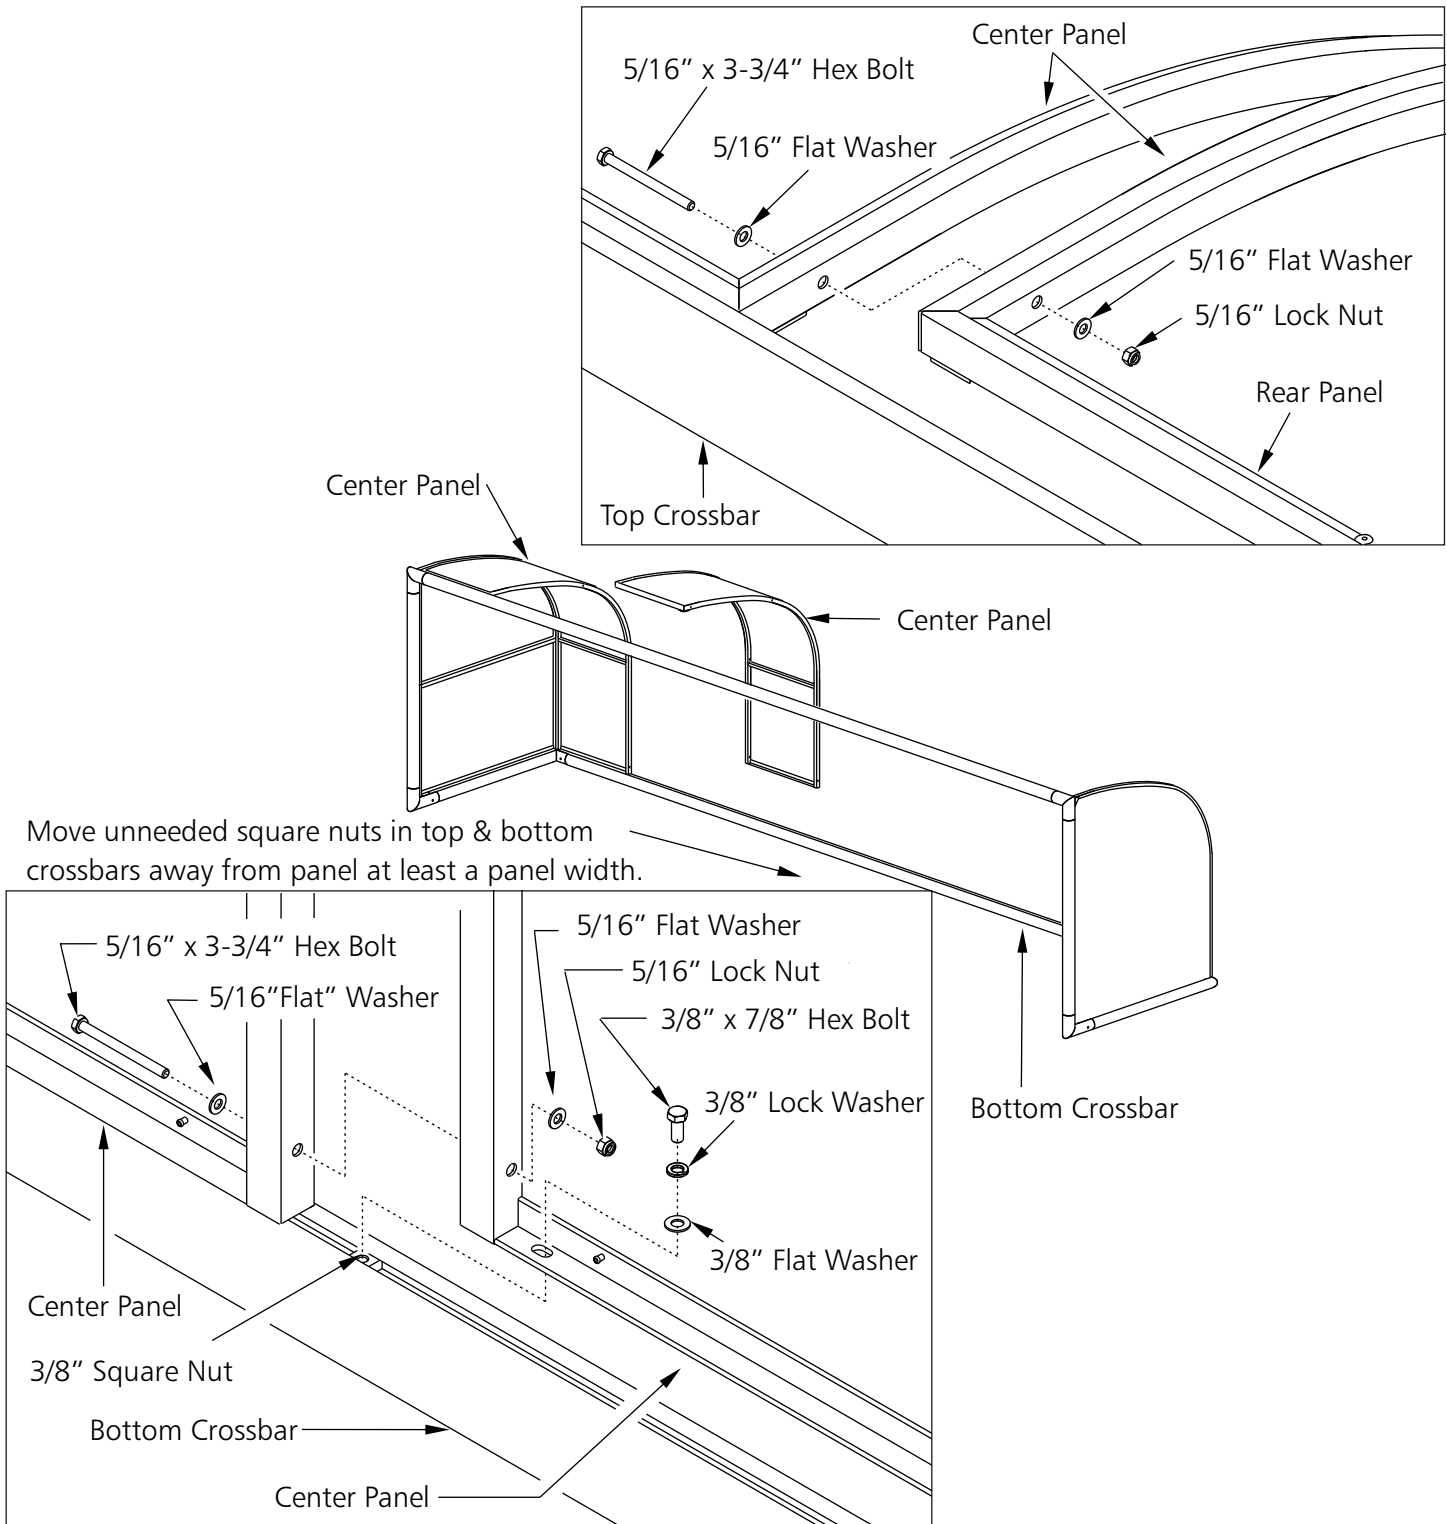


**THIS UNIT MUST BE ANCHORED ACCORDING TO THESE INSTRUCTIONS AT ALL TIMES**

**⚠ WARNING**

THIS EQUIPMENT MUST BE STORED IN A SECURED, SHELTERED AREA WHEN NOT IN USE OR IN THE THREAT OF HIGH WINDS. ANY WEATHER DAMAGE TO THIS EQUIPMENT WILL NOT BE COVERED UNDER KWIK GOAL'S PRODUCT GUARANTEE. DO NOT LEAVE THIS EQUIPMENT UNATTENDED.

12. If installing Bench or Molded Seating, skip to step 13.

If installing Luxury Seating, tighten all panel joint bolts. Begin at center joint and work outward. Tighten 3 bolts per joint. Tighten 3 panel frame bolts on each of the left and right end panels. Tighten panel to frame bolts at top and bottom of each center panel.

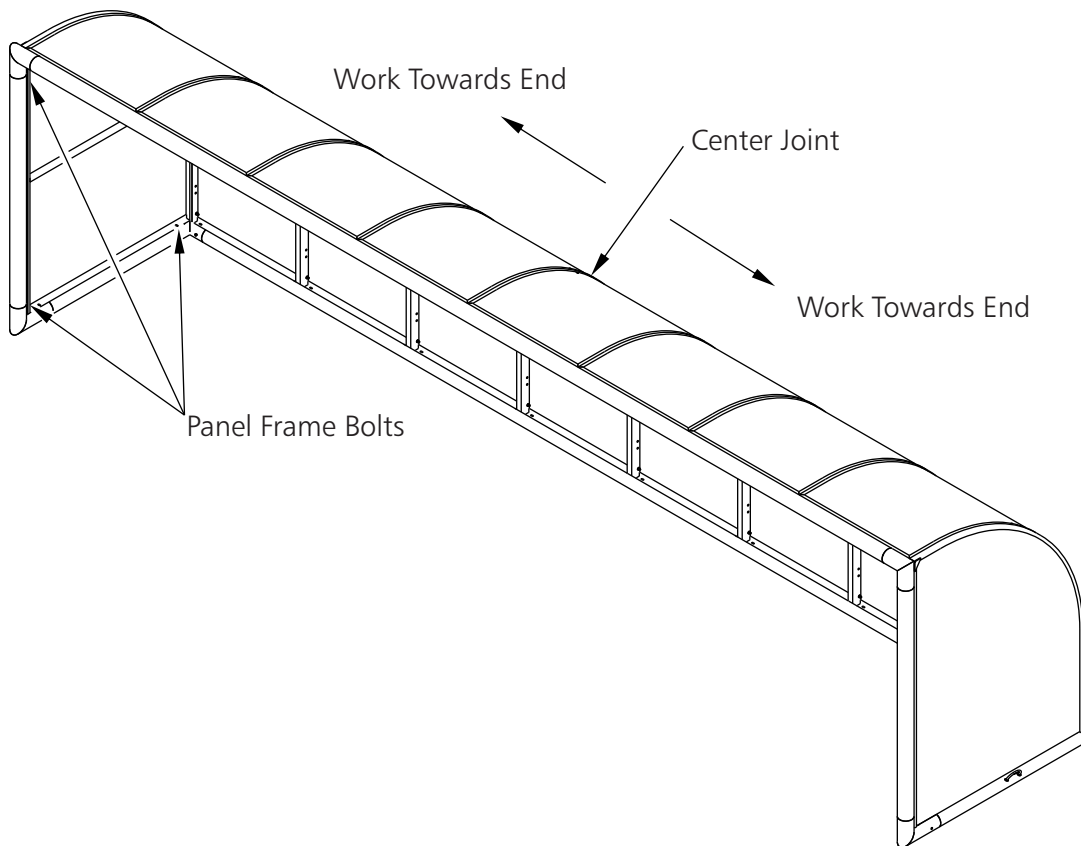


**THIS UNIT MUST BE ANCHORED ACCORDING TO THESE INSTRUCTIONS AT ALL TIMES**

**⚠ WARNING**


THIS EQUIPMENT MUST BE STORED IN A SECURED, SHELTERED AREA WHEN NOT IN USE OR IN THE THREAT OF HIGH WINDS. ANY WEATHER DAMAGE TO THIS EQUIPMENT WILL NOT BE COVERED UNDER KWIK GOAL'S PRODUCT GUARANTEE. DO NOT LEAVE THIS EQUIPMENT UNATTENDED.

13. If anchoring to concrete slab, skip to step 16.

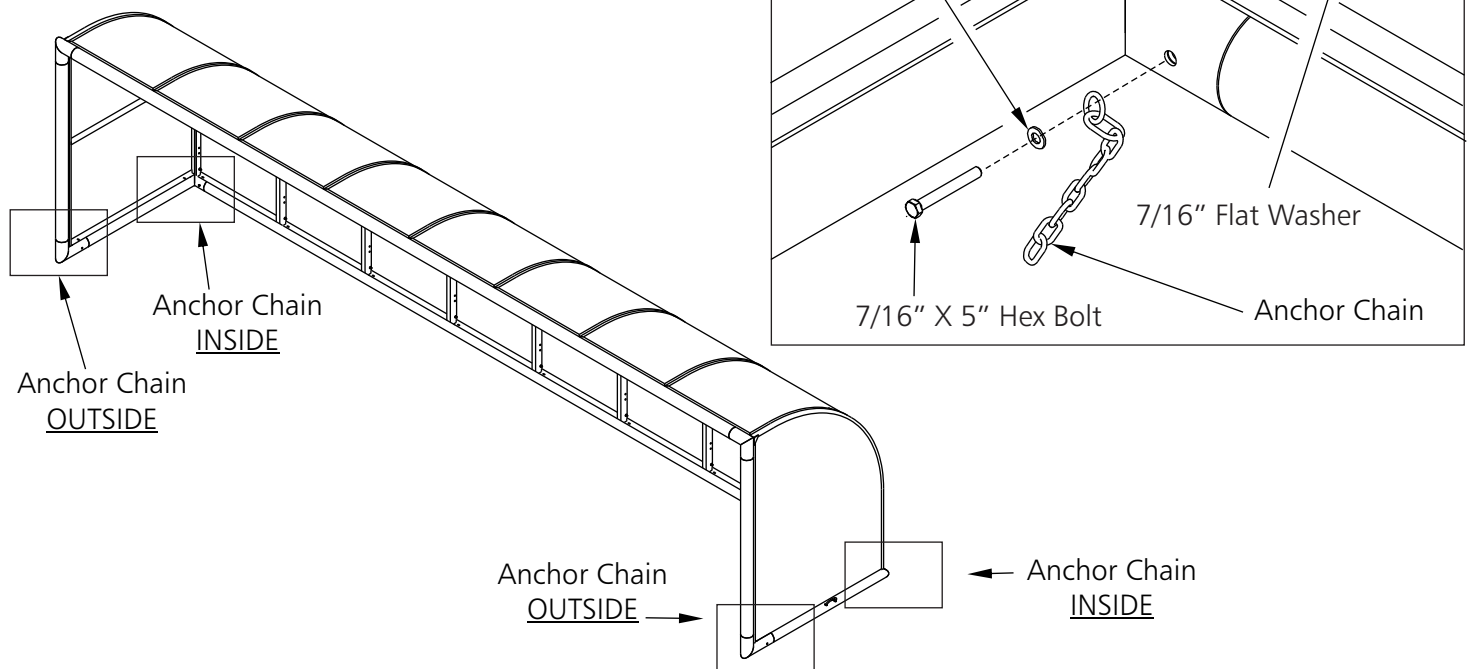

14. Hardware for this step are in **Anchor Hdw** pack.

Attach anchor chain to shelter frame, 2 in the front on the outside and 2 on the inside at the back as shown.

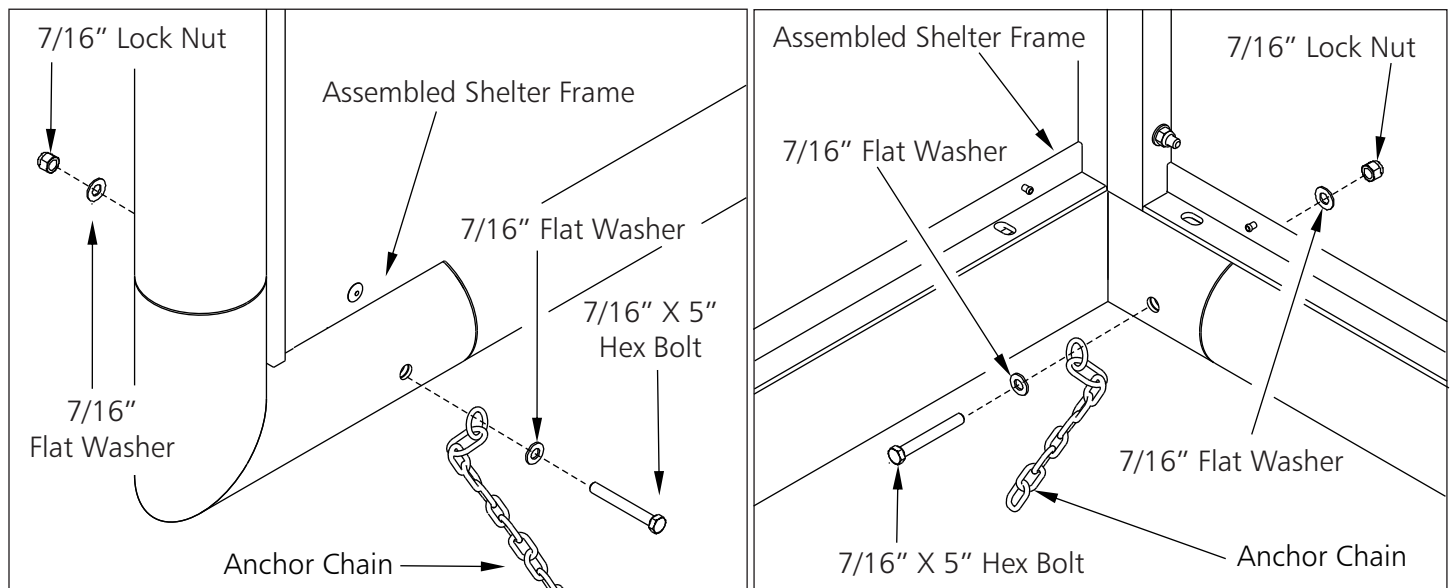


**THIS UNIT MUST BE ANCHORED ACCORDING TO THESE INSTRUCTIONS AT ALL TIMES**

**⚠ WARNING**

THIS EQUIPMENT MUST BE STORED IN A SECURED, SHELTERED AREA WHEN NOT IN USE OR IN THE THREAT OF HIGH WINDS. ANY WEATHER DAMAGE TO THIS EQUIPMENT WILL NOT BE COVERED UNDER KWIK GOAL'S PRODUCT GUARANTEE. DO NOT LEAVE THIS EQUIPMENT UNATTENDED.

15. Hardware for this step is in **Anchor Hdw** pack.

Permanent ground anchors must be used at all times. Dig four holes according to the layout below. Note: areas subject to heavy frost may require depths as deep as 36". Prepare holes and add drain stone as shown. Install anchor in each hole and fill hole with concrete. Allow concrete to cure before attaching shelter to anchors. Upon completion of shelter frame, refer to seating instructions to complete your seating shelter.

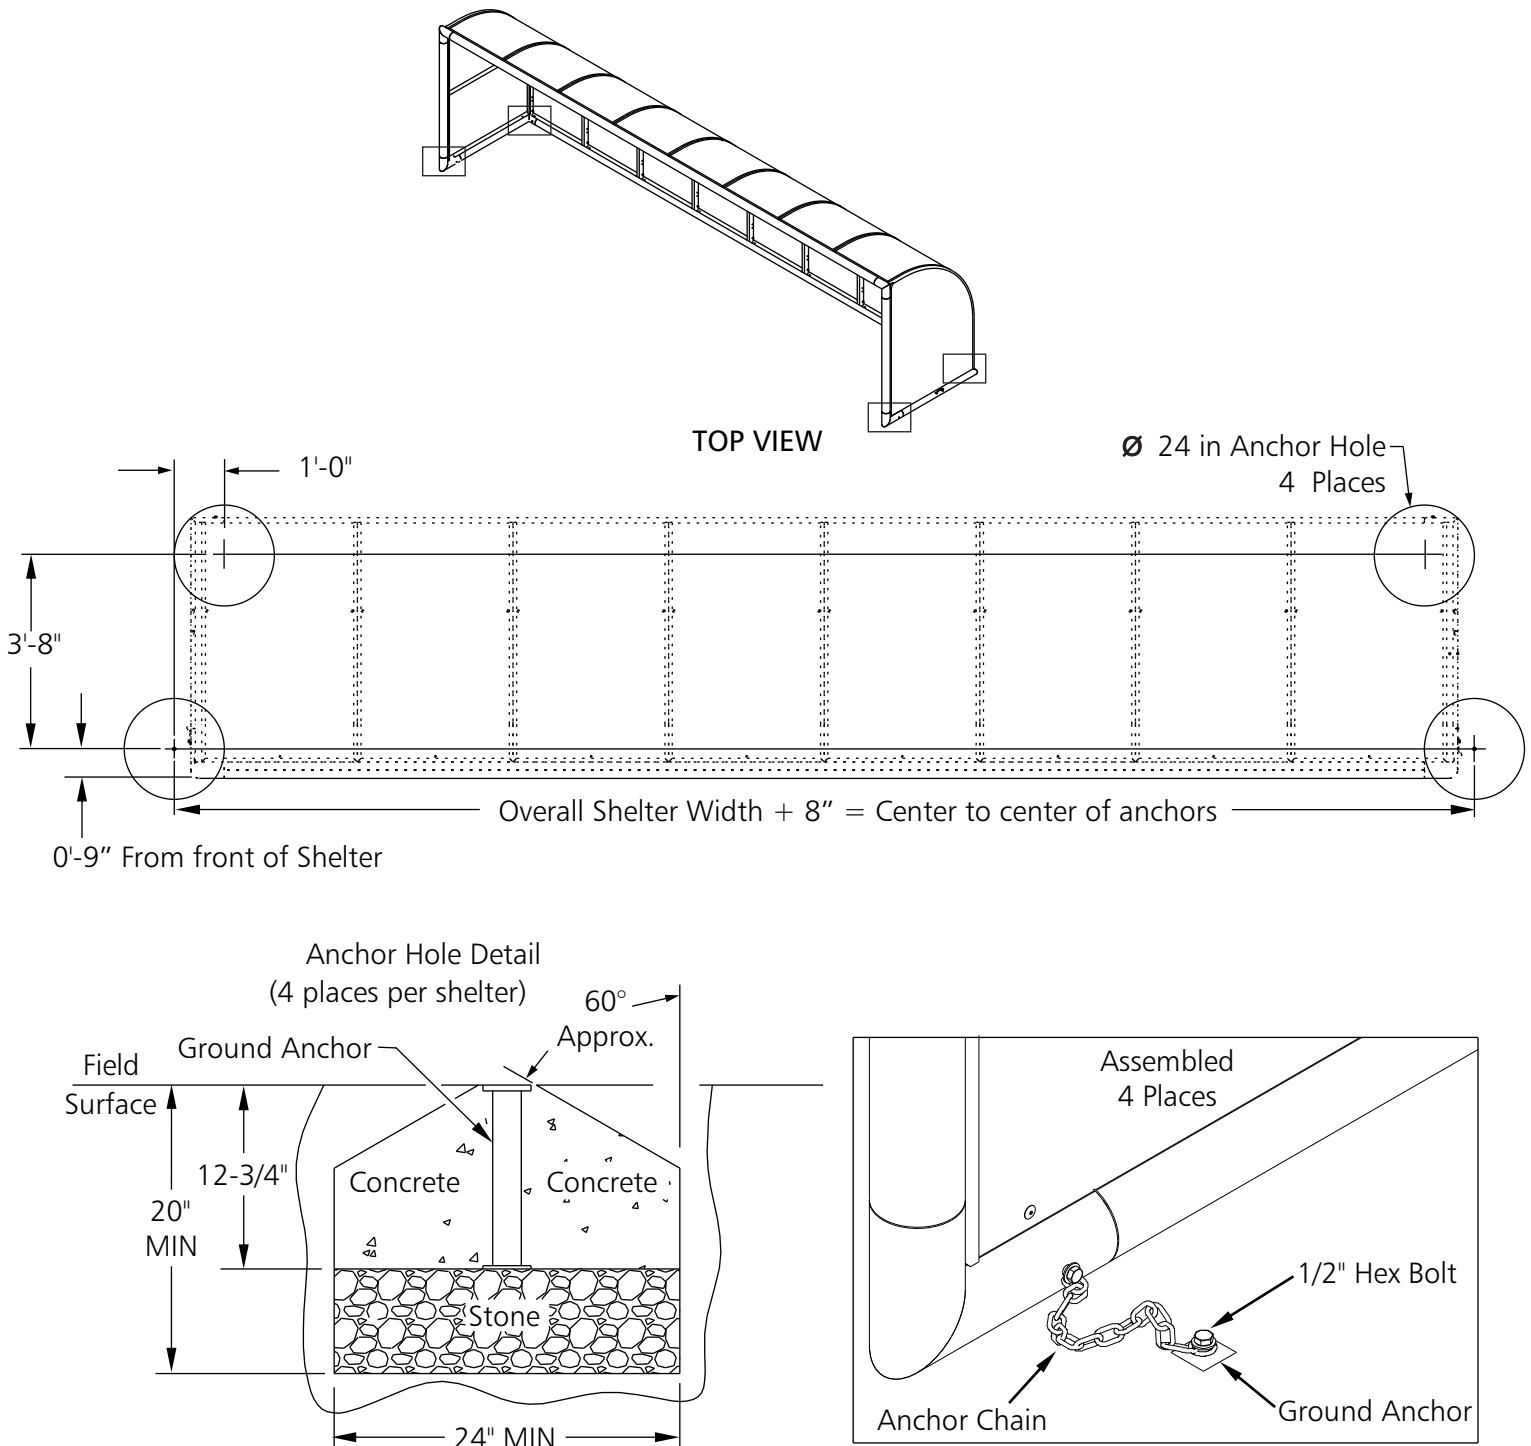


**THIS UNIT MUST BE ANCHORED ACCORDING TO THESE INSTRUCTIONS AT ALL TIMES**

**⚠ WARNING**


THIS EQUIPMENT MUST BE STORED IN A SECURED, SHELTERED AREA WHEN NOT IN USE OR IN THE THREAT OF HIGH WINDS. ANY WEATHER DAMAGE TO THIS EQUIPMENT WILL NOT BE COVERED UNDER KWIK GOAL'S PRODUCT GUARANTEE. DO NOT LEAVE THIS EQUIPMENT UNATTENDED.

16. Hardware for this step is in **Anchor Hdw** pack.

Shelter may be anchored to a concrete pad using anchor brackets. Attach 8 brackets to shelter as shown.

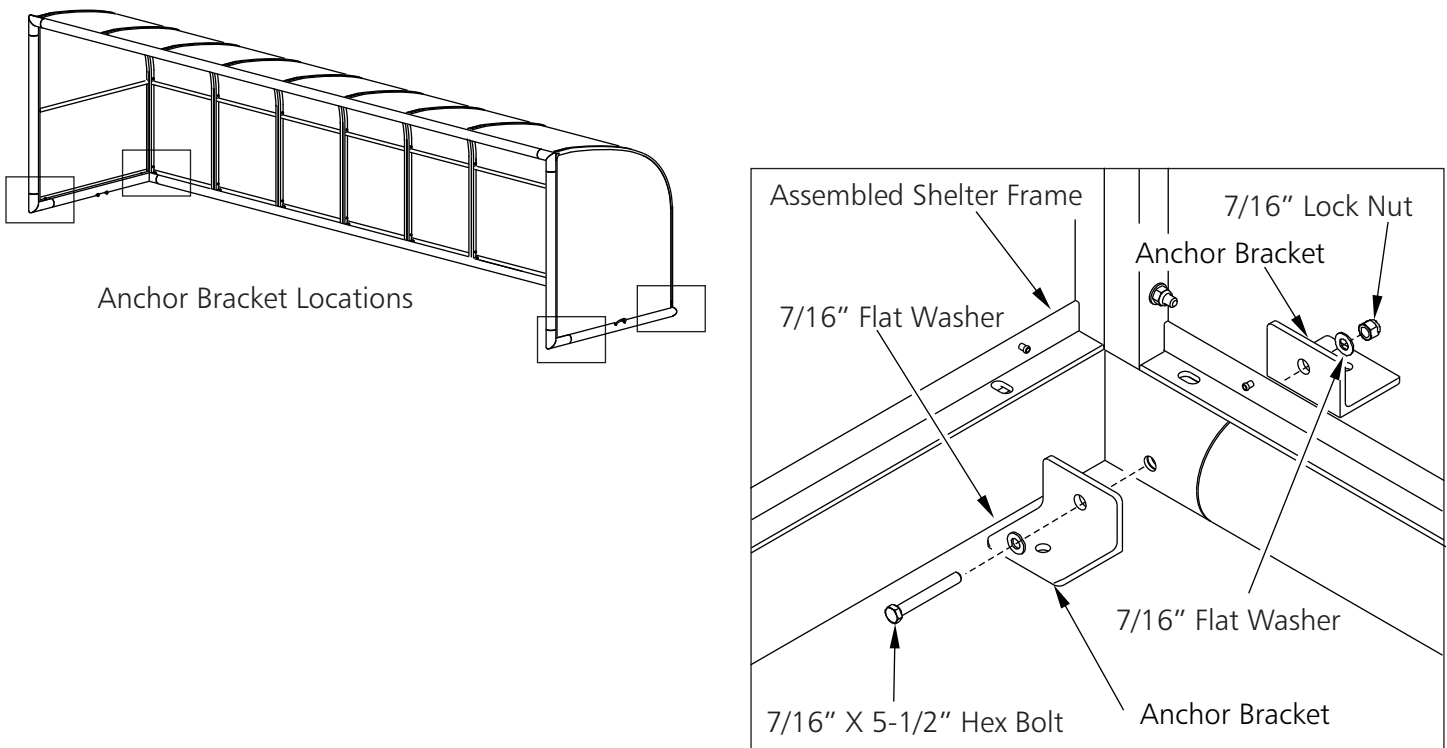

17. Place shelter in location of install and mark 8 anchor locations on concrete. Install eight 1/2\" diameter anchors with a minimum rating of 2500 lbs. each. Upon completion of shelter frame, refer to seating instructions to complete your seating shelter.

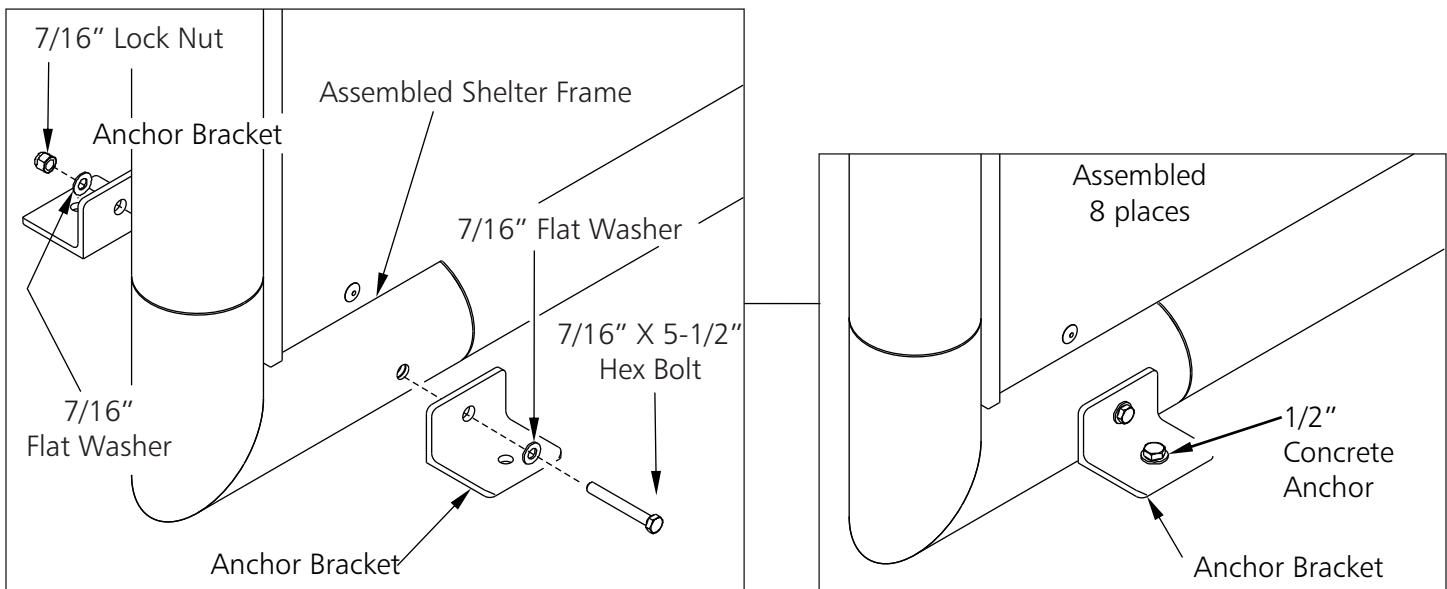

**THIS UNIT MUST BE ANCHORED ACCORDING TO THESE INSTRUCTIONS AT ALL TIMES**

**⚠WARNING**



THIS EQUIPMENT MUST BE STORED IN A SECURED, SHELTERED AREA WHEN NOT IN USE OR IN THE THREAT OF HIGH WINDS. ANY WEATHER DAMAGE TO THIS EQUIPMENT WILL NOT BE COVERED UNDER KWIK GOAL'S PRODUCT GUARANTEE. DO NOT LEAVE THIS EQUIPMENT UNATTENDED.



18. If desired, panel joints may be sealed with a small bead of urethane sealant. Seal across crossbar to panel joint, then panel to panel joints.

**NOTE:** Panel to panel joints should only be sealed between crossbar and lower brace of panels. Sealant below lower brace line is not necessary.

Prevent sealant material from contacting polycarbonate.

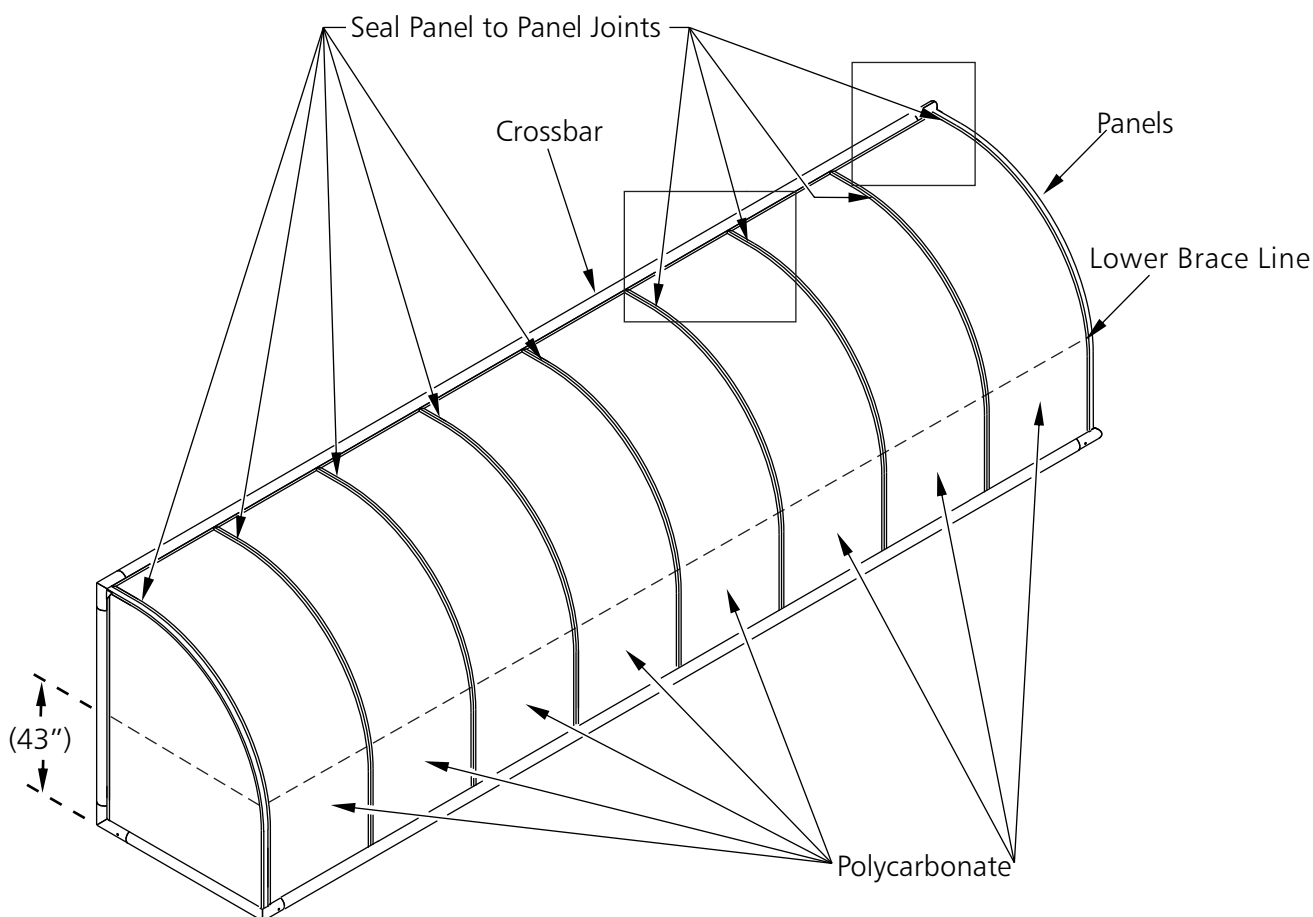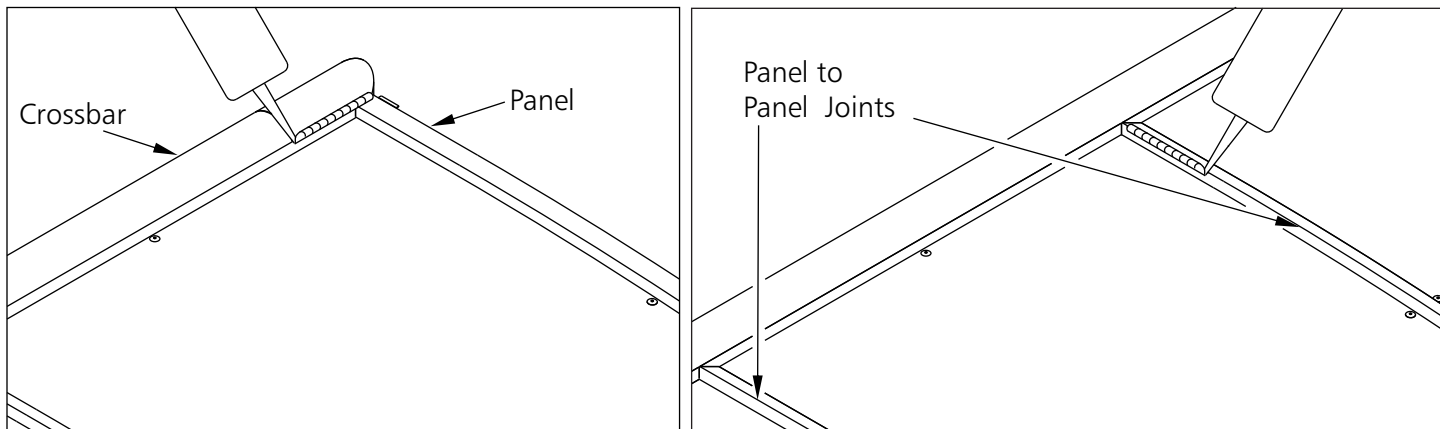

Go to [kwikgoal.com](http://kwikgoal.com) for additional product information.

**THIS UNIT MUST BE ANCHORED ACCORDING TO THESE INSTRUCTIONS AT ALL TIMES**

**⚠WARNING**

THIS EQUIPMENT MUST BE STORED IN A SECURED, SHELTERED AREA WHEN NOT IN USE OR IN THE THREAT OF HIGH WINDS. ANY WEATHER DAMAGE TO THIS EQUIPMENT WILL NOT BE COVERED UNDER KWIK GOAL'S PRODUCT GUARANTEE. DO NOT LEAVE THIS EQUIPMENT UNATTENDED.




## ASSEMBLY INSTRUCTIONS FOR BENCH SEATS FOR 9B511 PORTABLE SHELTER

**\*THIS UNIT MUST BE ASSEMBLED BY A MINIMUM OF TWO QUALIFIED PERSONS\*  
SHELTERS MUST BE ANCHORED AT ALL TIMES WITH PERMANENT GROUND ANCHORS.**

1. Unpack all parts and check for damage that may have occurred during shipping. If damage has occurred, notify Kwik Goal immediately. Lay out all parts. Remove all cardboard and packaging immediately. Wet or damp packaging may damage contents.
2. Refer to 9B51 instructions to assemble shelter frame prior to beginning seat assembly.
3. Read through entire instruction before beginning assembly and installation.


**NOTE: Components may be packaged in one or more additional boxes.**

### Parts

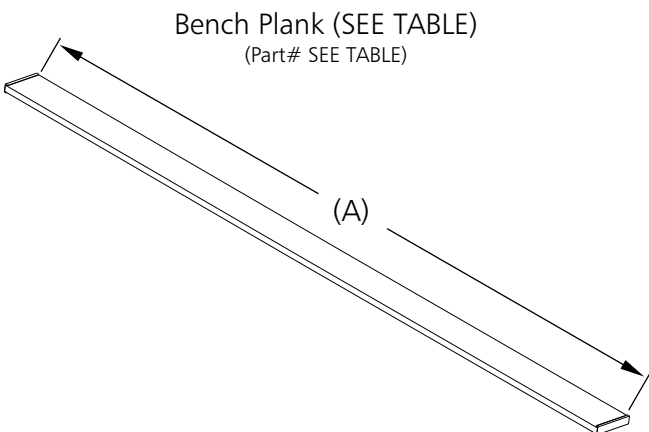


MODEL#	DIM (A)	ANODIZED PART #	POWDER COATED PART #	QTY
9B5110	180"	UZ468	UZ1118	6
9B5118	288"	UZ1209	UZ1490	3
9B5117	252"	UZ763	UZ1119	3
9B5116	216"	UZ1459	UZ1502	3
9B5115	180"	UZ468	UZ1118	3
9B5114	144"	UZ1460	UZ1503	3
9B5113	108"	UZ1115	UZ1491	3

Seat Frame (SEE TABLE)  
(Part# UZ1106)



MODEL#	QTY
9B5110	6
9B5118	4
9B5117	4
9B5116	3
9B5115	3
9B5114	2
9B5113	2

Seat Support  
(Part# UZ1113)



MODEL#	QTY
9B5110	4
9B5118	2
9B5117	2
9B5116	2
9B5115	2
9B5114	2
9B5113	2

**THIS UNIT MUST BE ANCHORED ACCORDING TO THESE INSTRUCTIONS AT ALL TIMES**

### **⚠ WARNING**

THIS EQUIPMENT MUST BE STORED IN A SECURED, SHELTERED AREA WHEN NOT IN USE OR IN THE THREAT OF HIGH WINDS. ANY WEATHER DAMAGE TO THIS EQUIPMENT WILL NOT BE COVERED UNDER KWIK GOAL'S PRODUCT GUARANTEE. DO NOT LEAVE THIS EQUIPMENT UNATTENDED.

**⚠ WARNING****IMPORTANT SAFETY INSTRUCTIONS**  
**READ CAREFULLY**


1. Lifting and moving heavy field equipment can be dangerous if not done properly. All Kwik Goal shelters must be moved by qualified personnel who are experienced in moving large, heavy field equipment. Kwik Goal recommends storing dolly and wheels in a secured area to prevent unauthorized use.
2. A minimum of four qualified, experienced people are required to install wheels and move shelter.
3. Do not attempt to lift, move, or remove anchors from any shelter in windy conditions.
4. Shelters must not be left unattended when wheels are installed.
5. Shelter must be on level, flat ground to use dolly handle and/or wheels.
6. Dolly is to be used as a wheel transport/storage and shelter lifting device. Do not use dolly to move shelter.
7. Use extreme caution when pushing shelter. Excessive force can overturn shelter. Always push at lowest point on shelter frame possible.
8. Do not push shelter directly from the front to rear or rear to front. Push from end to end. (Refer to 9B1201 - Shelter Dolly instructions for details.)
9. Always use two people to lift shelter with dolly. With one person maintaining light pressure on the handle, the second may insert wheels into shelter. Install both wheels before resting shelter on the ground. (Refer to 9B1201 - Shelter Dolly instructions for details.)

**NEVER LOWER SHELTER WITH ONLY ONE WHEEL INSTALLED**

## Parts Continued

### Seat Frame Plate (SEE TABLE)


(Part# UZ1107)



MODEL#	QTY
9B5110	12
9B5118	8
9B5117	8
9B5116	6
9B5115	6
9B5114	4
9B5113	4

### Plank Hold Down (SEE TABLE)

(Part# UZ475)



MODEL#	QTY
9B5110	44
9B5118	28
9B5117	28
9B5116	22
9B5115	22
9B5114	16
9B5113	16

### 3/8" Seat Frame Spacers (SEE TABLE)


(Part# TZ308)



MODEL#	QTY
9B5110	24
9B5118	16
9B5117	16
9B5116	12
9B5115	12
9B5114	8
9B5113	8


### Assembly Tools

Wrenches  
1/2" & 9/16"



Ratchet with Socket  
1/2" & 9/16"

AND



### Hardware needed per Model

	<u>9B5113</u>	<u>9B5114</u>	<u>9B5115</u>	<u>9B5116</u>	<u>9B5117</u>	<u>9B5118</u>	<u>9B5110</u>
5/16" X 3" Carriage Bolt (Part# TZ172)	(16)	(16)	(22)	(22)	(28)	(28)	(44)
5/16" Flat Washer (Part# TZ4)	(16)	(16)	(22)	(22)	(28)	(28)	(44)
3/8" X 4-1/4" Hex Bolt (Part# TZ303)	(8)	(8)	(12)	(12)	(16)	(16)	(24)
3/8" Flat Washer (Part# TZ60)	(16)	(16)	(24)	(24)	(32)	(32)	(48)
3/8" Lock Nut (Part# TZ197)	(8)	(8)	(12)	(12)	(16)	(16)	(24)

**THIS UNIT MUST BE ANCHORED ACCORDING TO THESE INSTRUCTIONS AT ALL TIMES**



### **▲WARNING**

THIS EQUIPMENT MUST BE STORED IN A SECURED, SHELTERED AREA WHEN NOT IN USE OR IN THE THREAT OF HIGH WINDS. ANY WEATHER DAMAGE TO THIS EQUIPMENT WILL NOT BE COVERED UNDER KWIK GOAL'S PRODUCT GUARANTEE. DO NOT LEAVE THIS EQUIPMENT UNATTENDED.

4. **9B5110** - skip to step 11, for all other goals continue to step 5.

5. Start at each end and attach seat frame plates to assembled shelter panels as shown. Attach remaining seat frame plates to assembled shelter panels at needed locations, do not exceed two panels between seat frame plates. Do not tighten bolts at this time.

NOTE: It may be necessary to loosen panel bolts to allow frame plate bolts to be inserted.

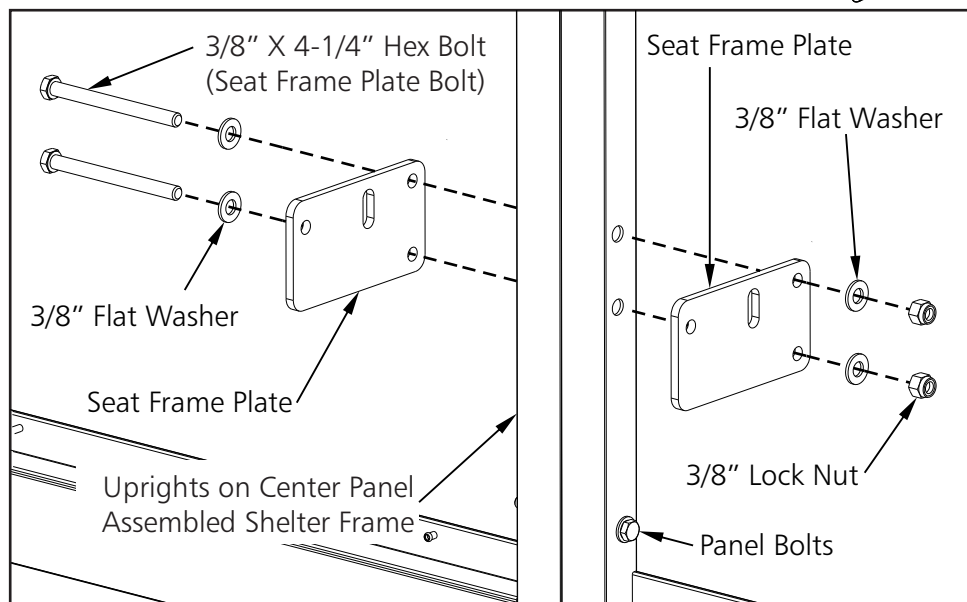
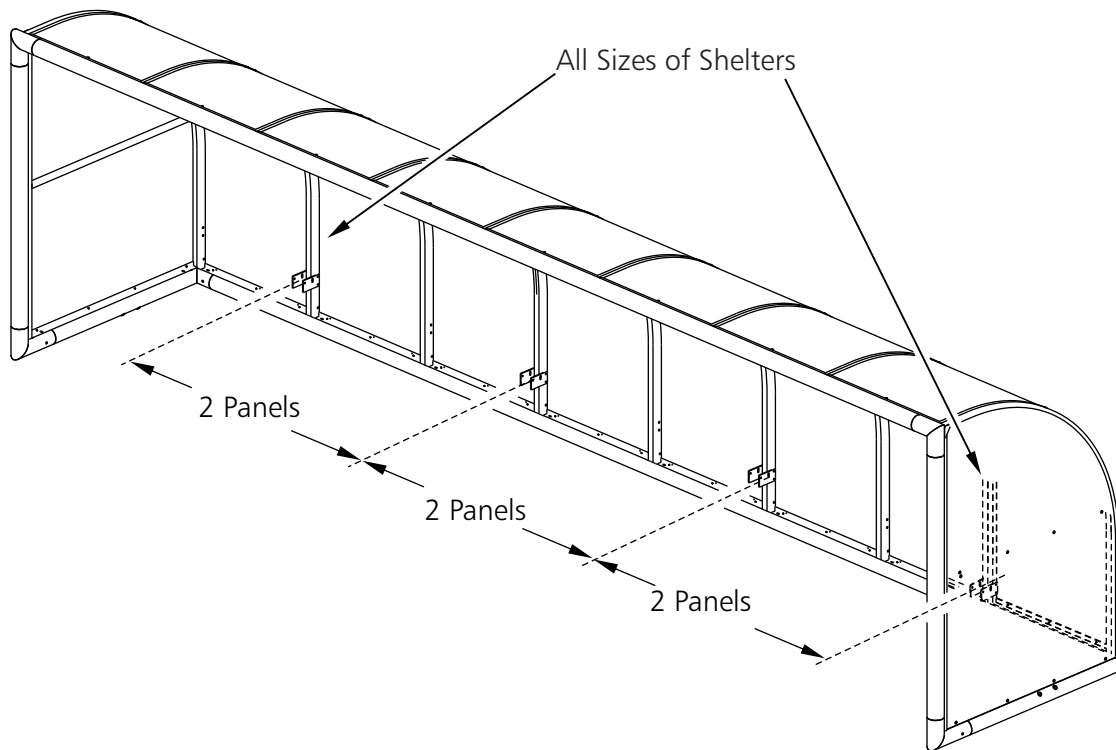


**THIS UNIT MUST BE ANCHORED ACCORDING TO THESE INSTRUCTIONS AT ALL TIMES**

**⚠WARNING**

THIS EQUIPMENT MUST BE STORED IN A SECURED, SHELTERED AREA WHEN NOT IN USE OR IN THE THREAT OF HIGH WINDS. ANY WEATHER DAMAGE TO THIS EQUIPMENT WILL NOT BE COVERED UNDER KWIK GOAL'S PRODUCT GUARANTEE. DO NOT LEAVE THIS EQUIPMENT UNATTENDED.

6. Attach seat frames at seat frame plate locations, do not overtighten bolts.

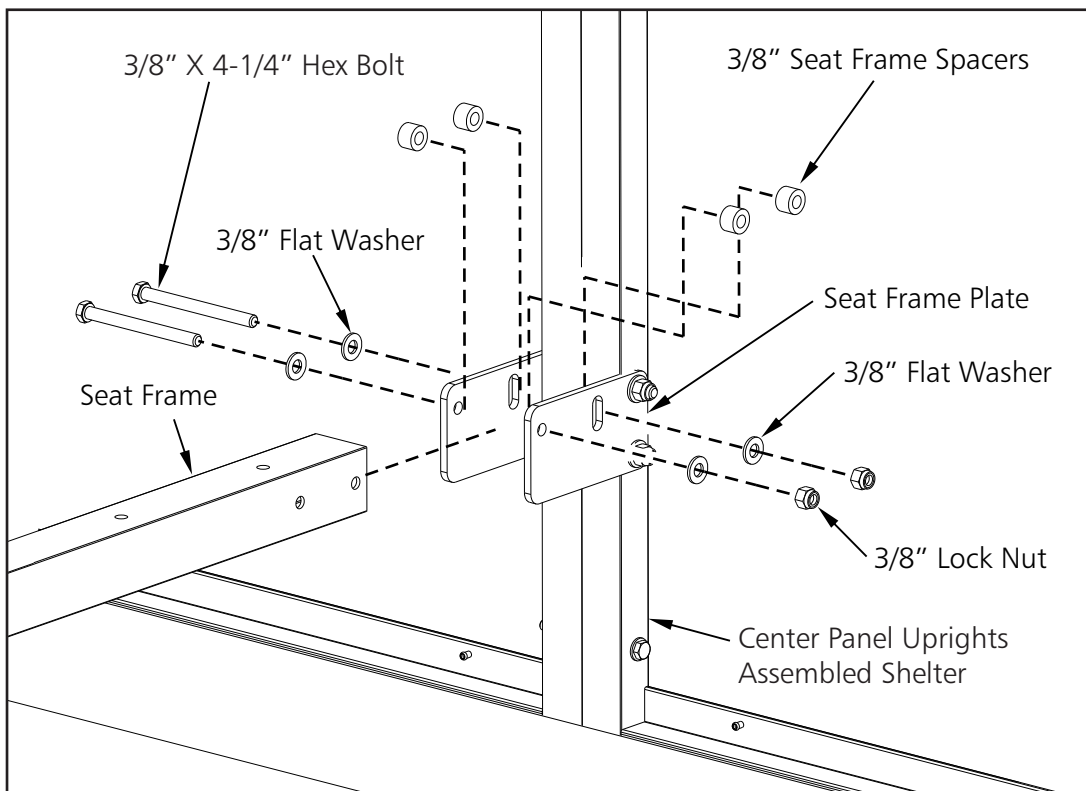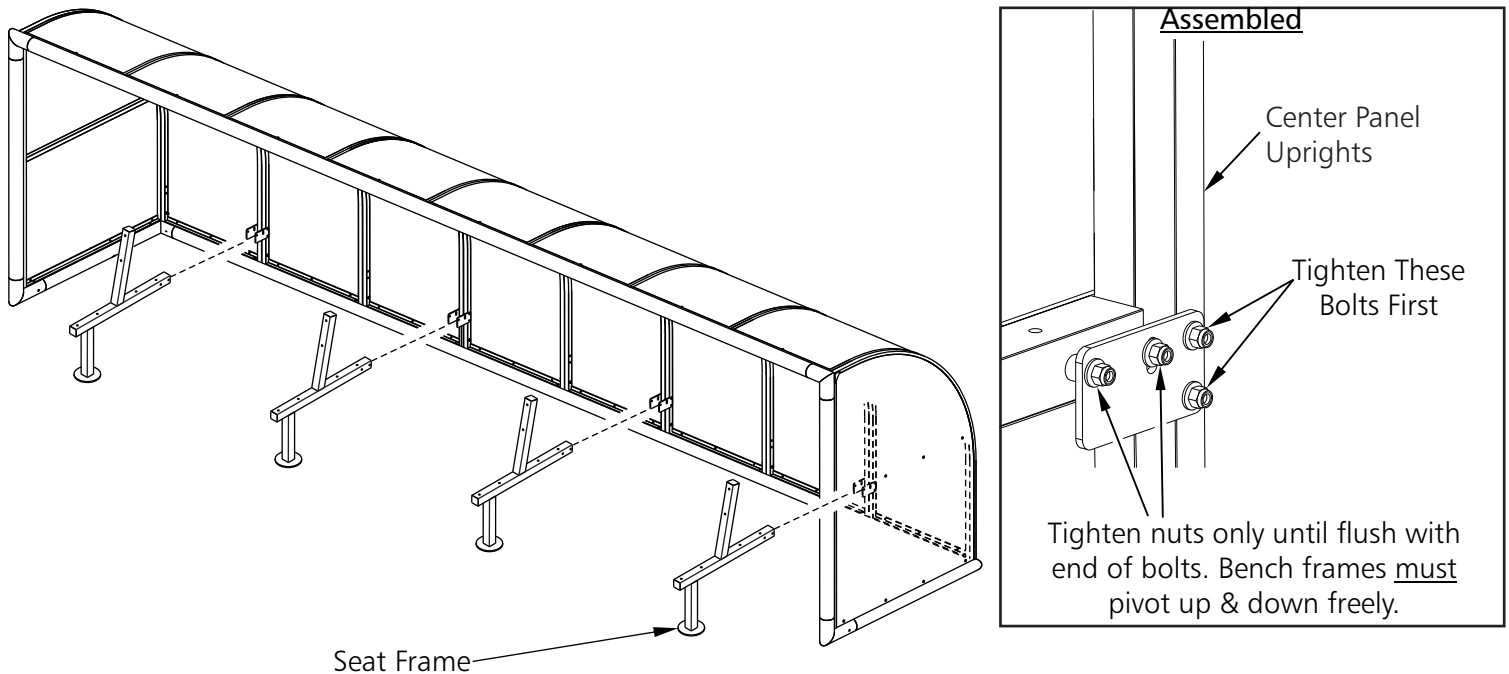


**THIS UNIT MUST BE ANCHORED ACCORDING TO THESE INSTRUCTIONS AT ALL TIMES**

**▲WARNING**

THIS EQUIPMENT MUST BE STORED IN A SECURED, SHELTERED AREA WHEN NOT IN USE OR IN THE THREAT OF HIGH WINDS. ANY WEATHER DAMAGE TO THIS EQUIPMENT WILL NOT BE COVERED UNDER KWIK GOAL'S PRODUCT GUARANTEE. DO NOT LEAVE THIS EQUIPMENT UNATTENDED.

7. Tighten all panel joint bolts. Begin at center joint and work outward. Tighten 3 bolts per joint. Tighten 3 panel frame bolts on each of the left and right end panels. Tighten panel to frame bolts at top and bottom of each center panel.

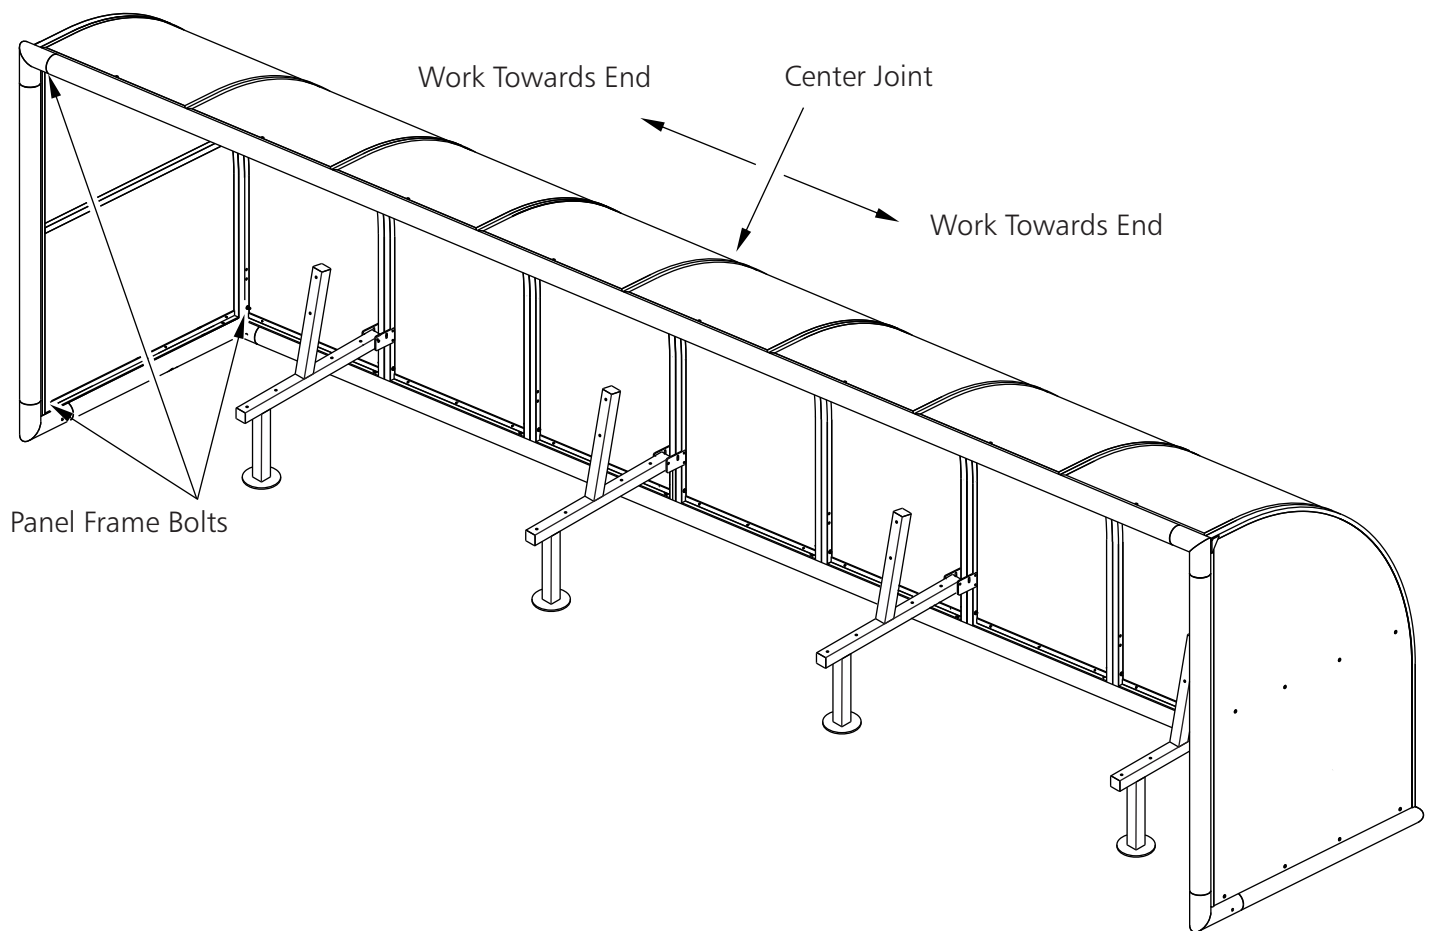


**THIS UNIT MUST BE ANCHORED ACCORDING TO THESE INSTRUCTIONS AT ALL TIMES**


**⚠ WARNING**

THIS EQUIPMENT MUST BE STORED IN A SECURED, SHELTERED AREA WHEN NOT IN USE OR IN THE THREAT OF HIGH WINDS. ANY WEATHER DAMAGE TO THIS EQUIPMENT WILL NOT BE COVERED UNDER KWIK GOAL'S PRODUCT GUARANTEE. DO NOT LEAVE THIS EQUIPMENT UNATTENDED.

8. Center the first bench plank at location shown. Attach bench plank to each seat frame. Align bench hold down parallel with slot in bench plank, insert, and turn ninety degrees (quarter turn) to attach bench plank to seat frame. Refer to step 11 if installing bench planks for the 9B5110 shelter.

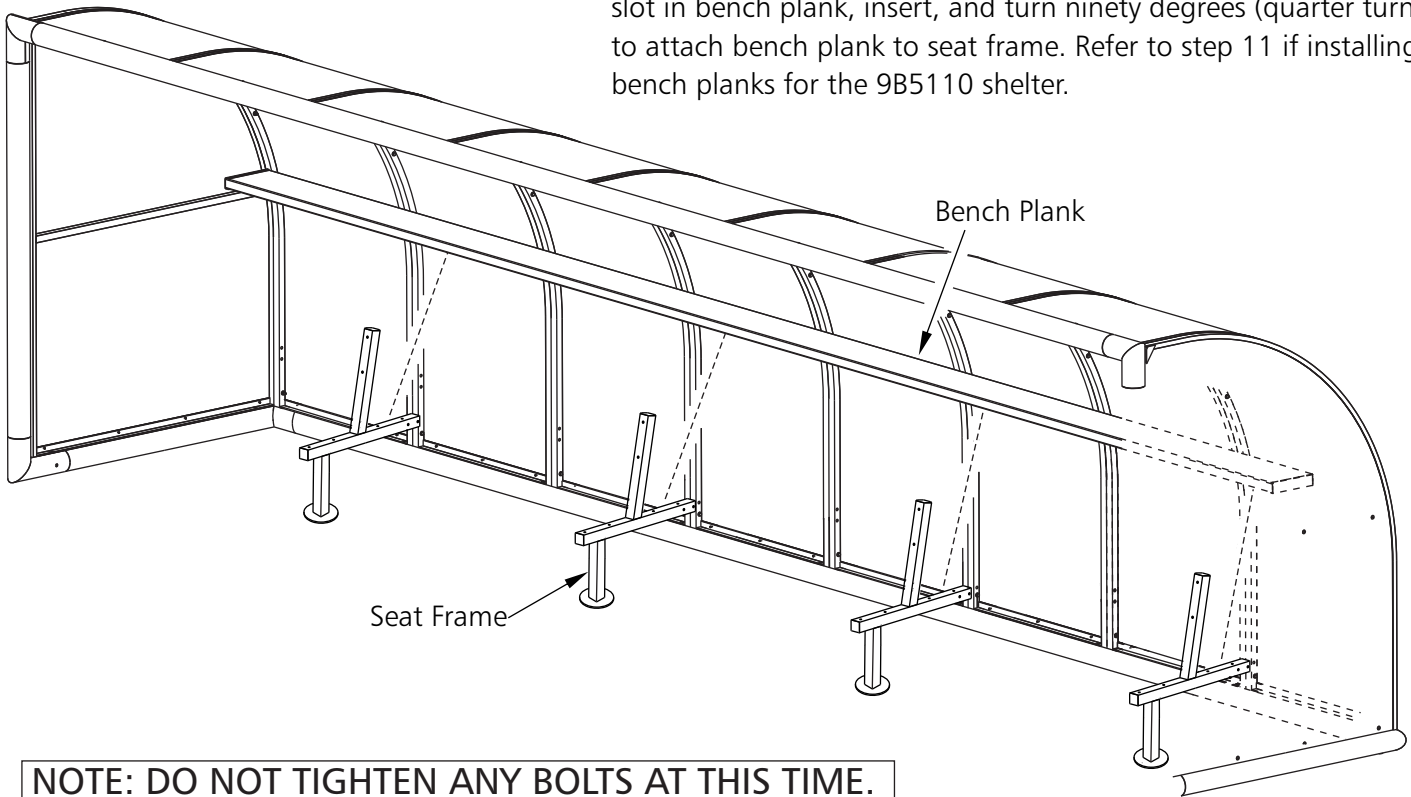

**NOTE: DO NOT TIGHTEN ANY BOLTS AT THIS TIME.**

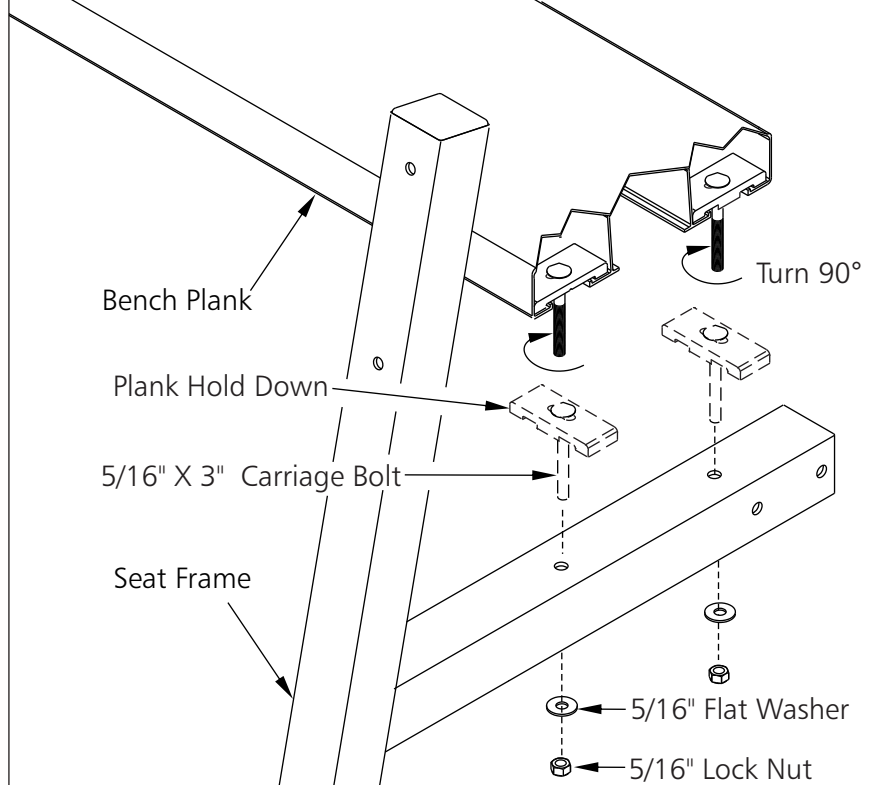


**THIS UNIT MUST BE ANCHORED ACCORDING TO THESE INSTRUCTIONS AT ALL TIMES**

**⚠ WARNING**

THIS EQUIPMENT MUST BE STORED IN A SECURED, SHELTERED AREA WHEN NOT IN USE OR IN THE THREAT OF HIGH WINDS. ANY WEATHER DAMAGE TO THIS EQUIPMENT WILL NOT BE COVERED UNDER KWIK GOAL'S PRODUCT GUARANTEE. DO NOT LEAVE THIS EQUIPMENT UNATTENDED.



9. Center and attach second bench plank to seat frames, also attach seat support to second bench plank at locations shown, do not overtighten bolts.

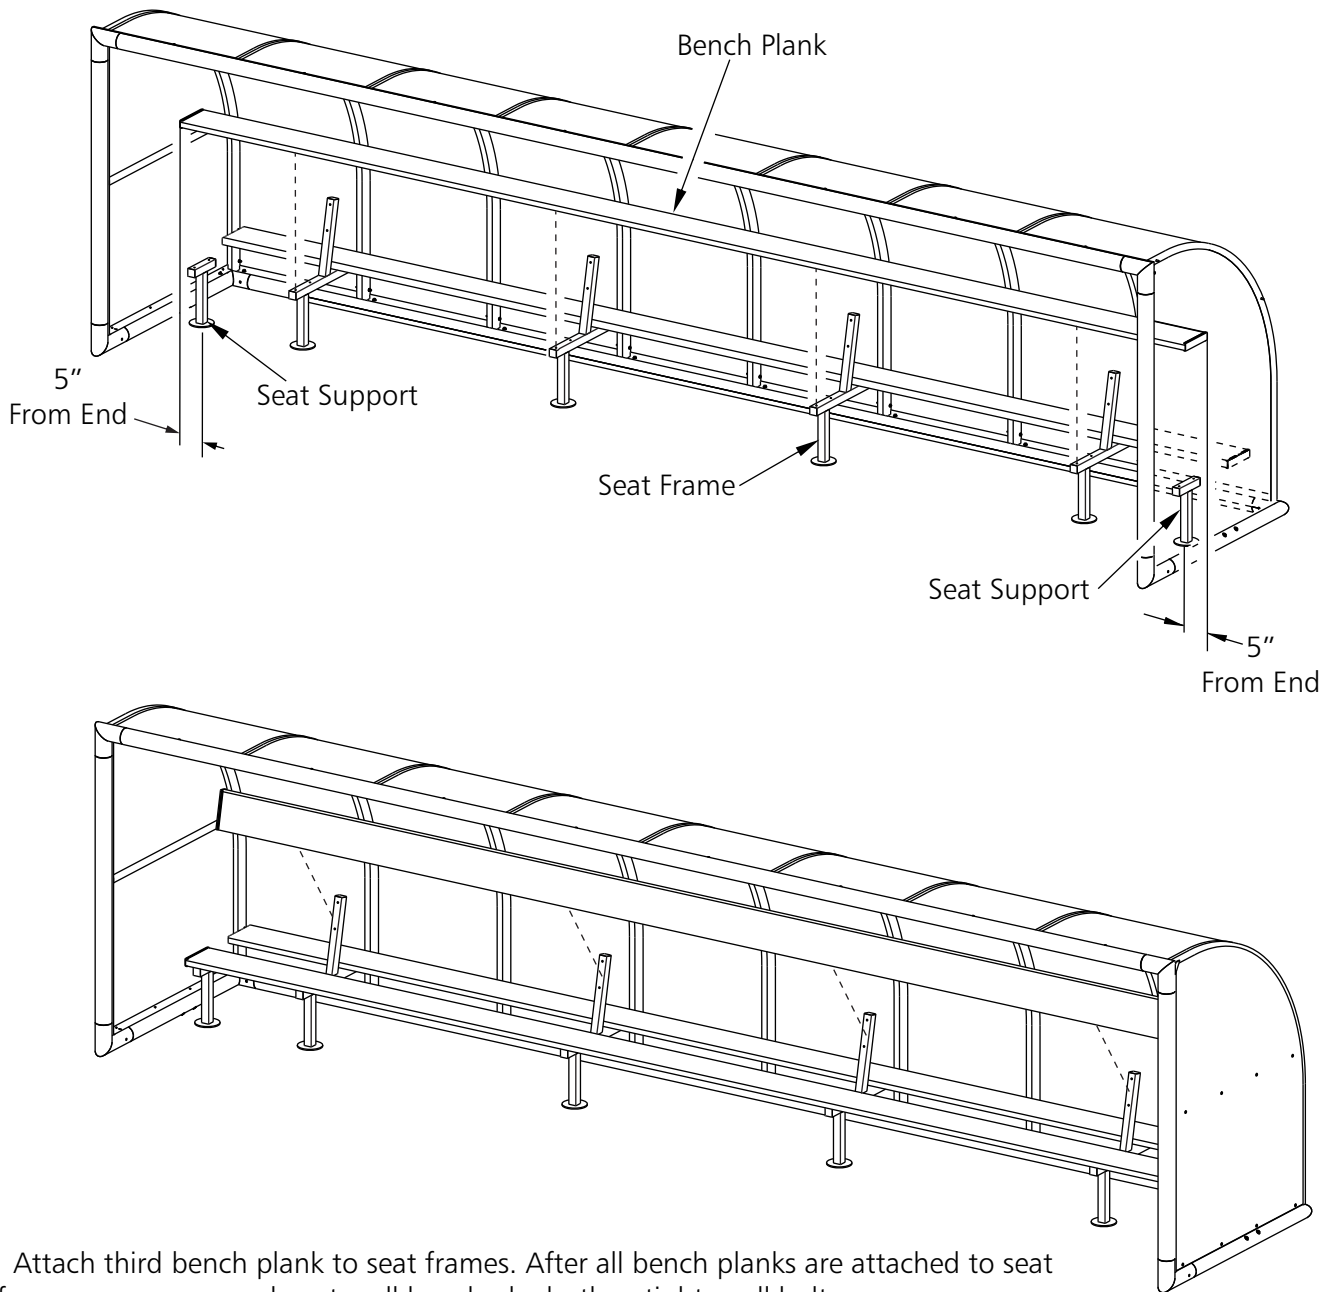



10. Attach third bench plank to seat frames. After all bench planks are attached to seat frames, square up and center all bench planks then tighten all bolts.  
Do not overtighten bolts.

**THIS UNIT MUST BE ANCHORED ACCORDING TO THESE INSTRUCTIONS AT ALL TIMES**

**▲WARNING**

THIS EQUIPMENT MUST BE STORED IN A SECURED, SHELTERED AREA WHEN NOT IN USE OR IN THE THREAT OF HIGH WINDS. ANY WEATHER DAMAGE TO THIS EQUIPMENT WILL NOT BE COVERED UNDER KWIK GOAL'S PRODUCT GUARANTEE. DO NOT LEAVE THIS EQUIPMENT UNATTENDED.

11. Start at each end and attach seat frame plates to assembled shelter panels as shown. Attach remaining seat frame plates to assembled shelter panels at needed locations, do not exceed two panels between seat frame plates. Do not tighten bolts at this time.  
NOTE: It may be necessary to loosen panel bolts to allow frame plate bolts to be inserted.

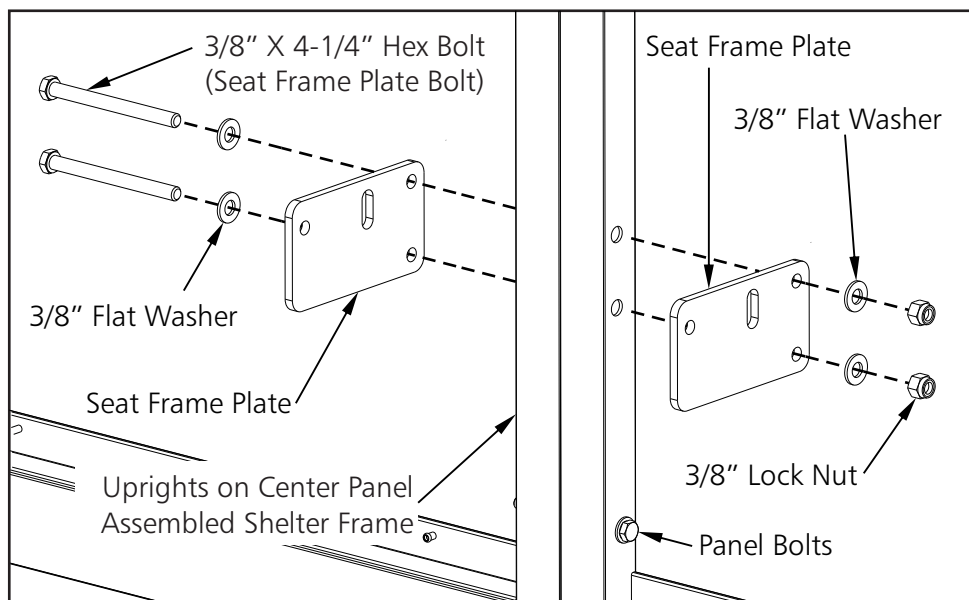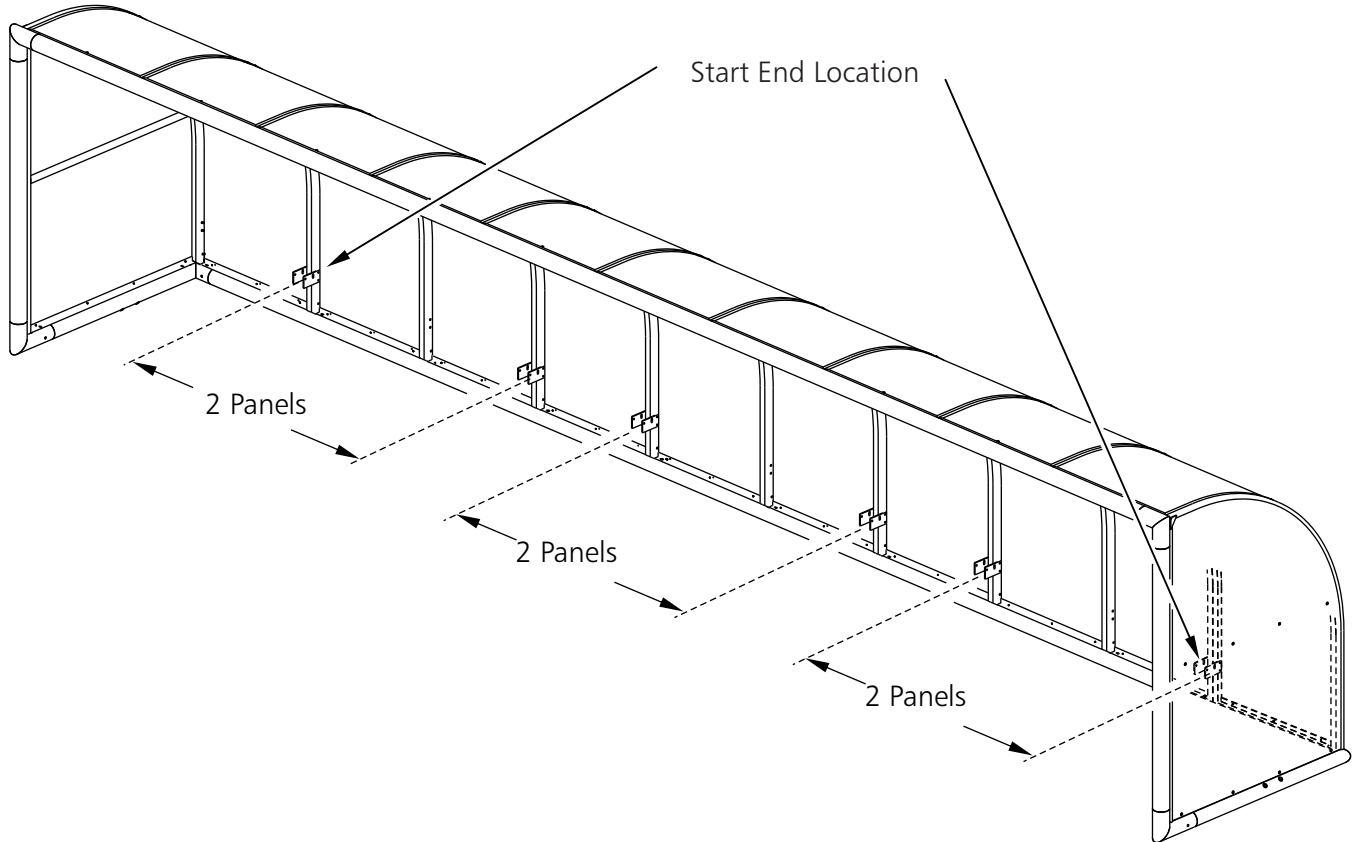


**THIS UNIT MUST BE ANCHORED ACCORDING TO THESE INSTRUCTIONS AT ALL TIMES**

**⚠ WARNING**

THIS EQUIPMENT MUST BE STORED IN A SECURED, SHELTERED AREA WHEN NOT IN USE OR IN THE THREAT OF HIGH WINDS. ANY WEATHER DAMAGE TO THIS EQUIPMENT WILL NOT BE COVERED UNDER KWIK GOAL'S PRODUCT GUARANTEE. DO NOT LEAVE THIS EQUIPMENT UNATTENDED.

12. Attach seat frames at seat frame plate locations, do not overtighten bolts.

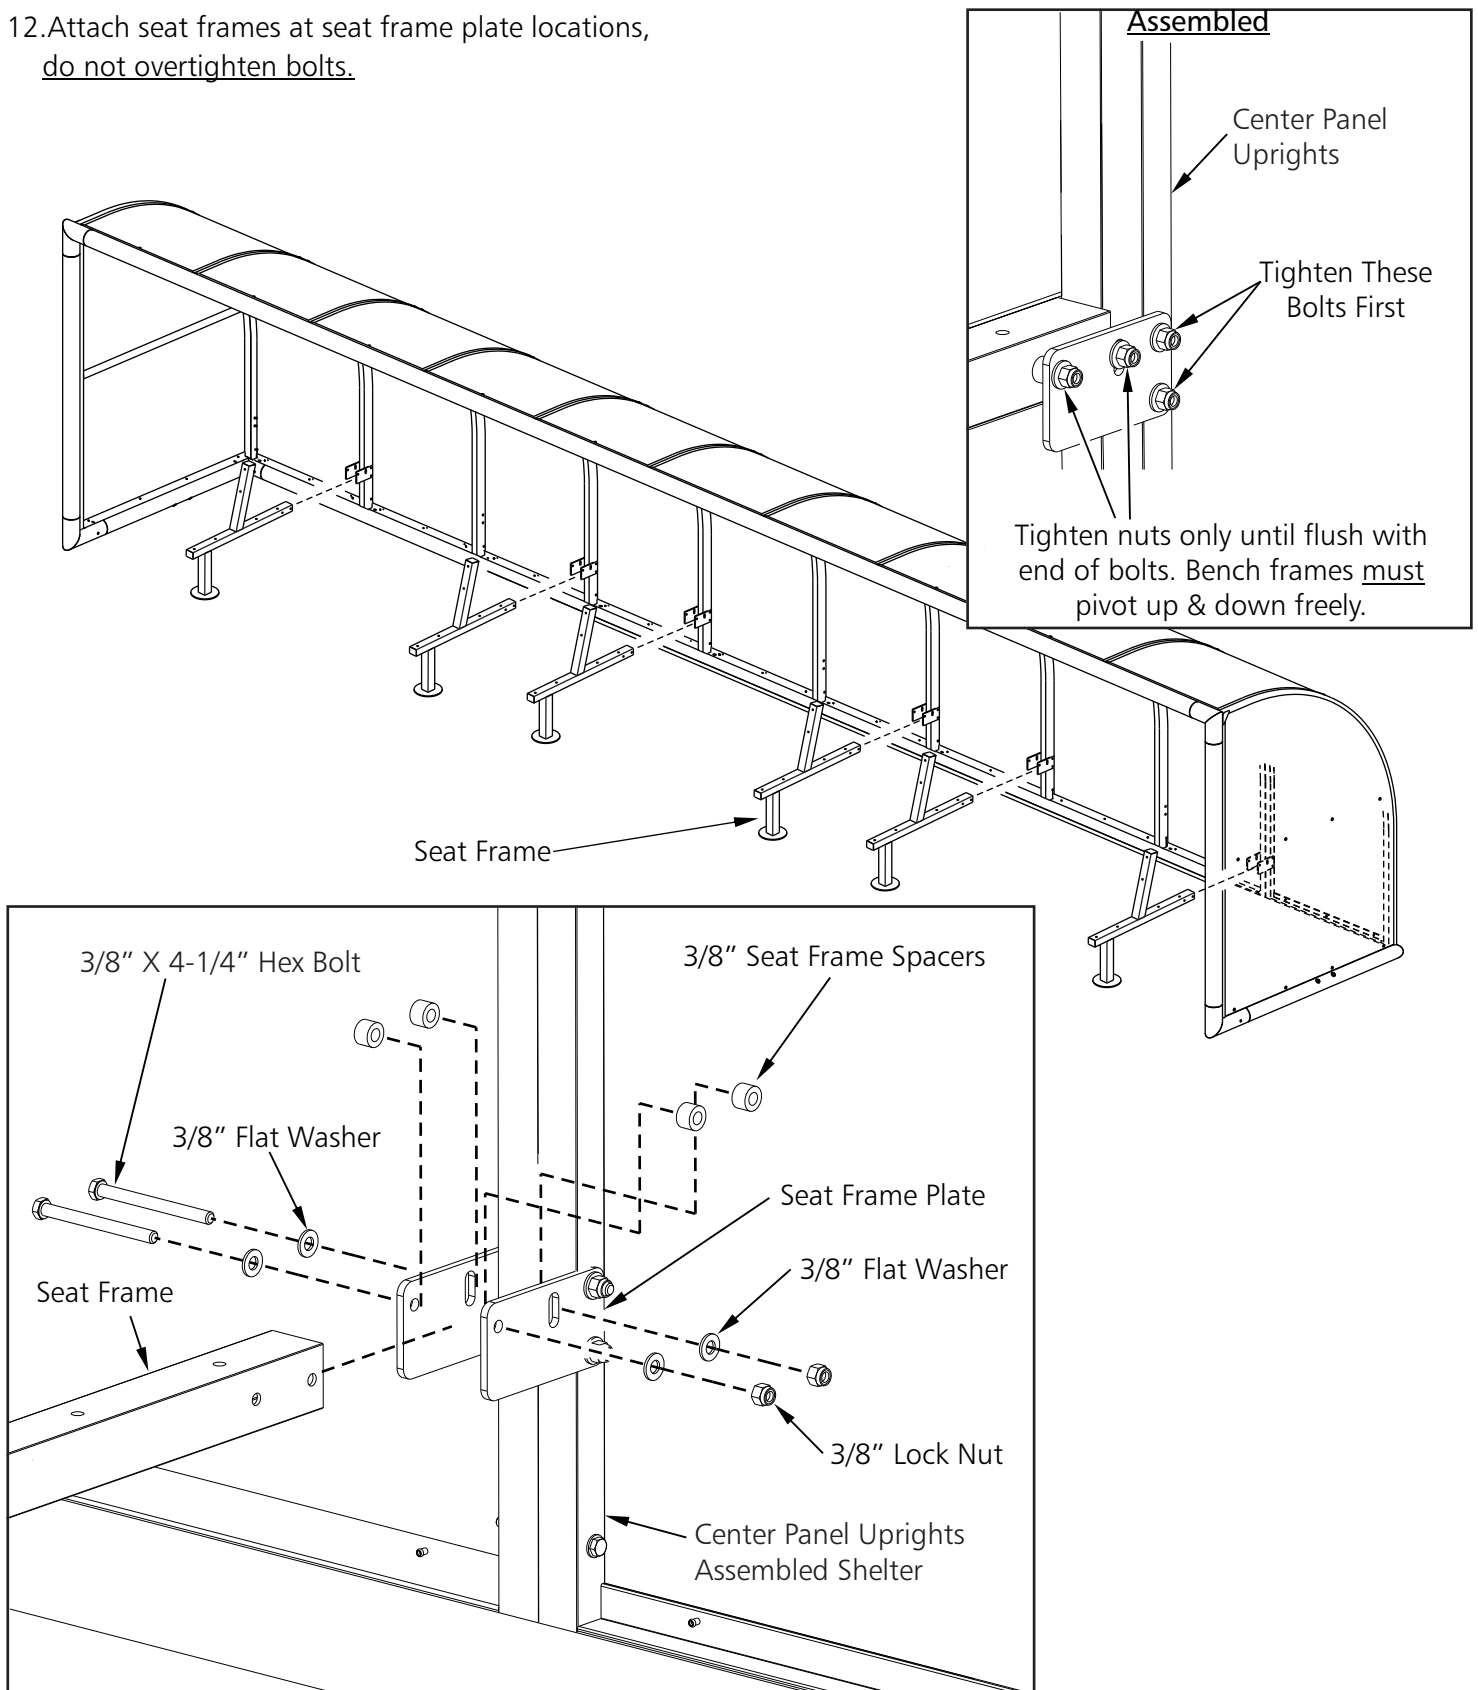


**THIS UNIT MUST BE ANCHORED ACCORDING TO THESE INSTRUCTIONS AT ALL TIMES**

**⚠ WARNING**

THIS EQUIPMENT MUST BE STORED IN A SECURED, SHELTERED AREA WHEN NOT IN USE OR IN THE THREAT OF HIGH WINDS. ANY WEATHER DAMAGE TO THIS EQUIPMENT WILL NOT BE COVERED UNDER KVIK GOAL'S PRODUCT GUARANTEE. DO NOT LEAVE THIS EQUIPMENT UNATTENDED.

13. Tighten all panel joint bolts. Begin at center joint and work outward. Tighten 3 bolts per joint. Tighten 3 panel frame bolts on each of the left and right end panels. Tighten panel to frame bolts at top and bottom of each center panel.


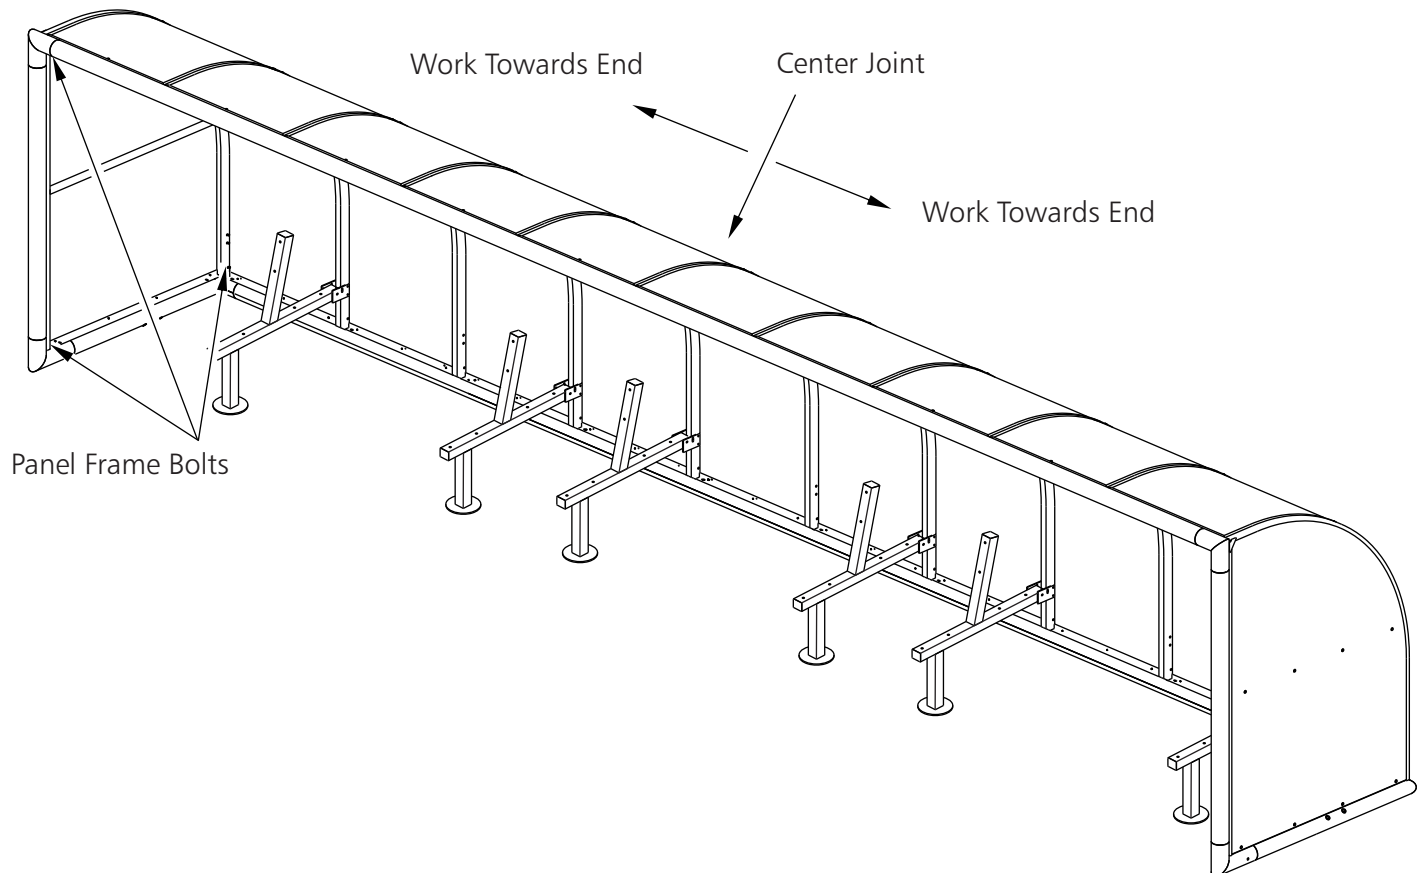


**THIS UNIT MUST BE ANCHORED ACCORDING TO THESE INSTRUCTIONS AT ALL TIMES**

**▲WARNING**

THIS EQUIPMENT MUST BE STORED IN A SECURED, SHELTERED AREA WHEN NOT IN USE OR IN THE THREAT OF HIGH WINDS. ANY WEATHER DAMAGE TO THIS EQUIPMENT WILL NOT BE COVERED UNDER KWIK GOAL'S PRODUCT GUARANTEE. DO NOT LEAVE THIS EQUIPMENT UNATTENDED.

14. Center the first bench plank at location shown. Attach bench plank to each seat frame. Align bench hold down parallel with slot in bench plank, insert, and turn ninety degrees (quarter turn) to attach bench plank to seat frame.

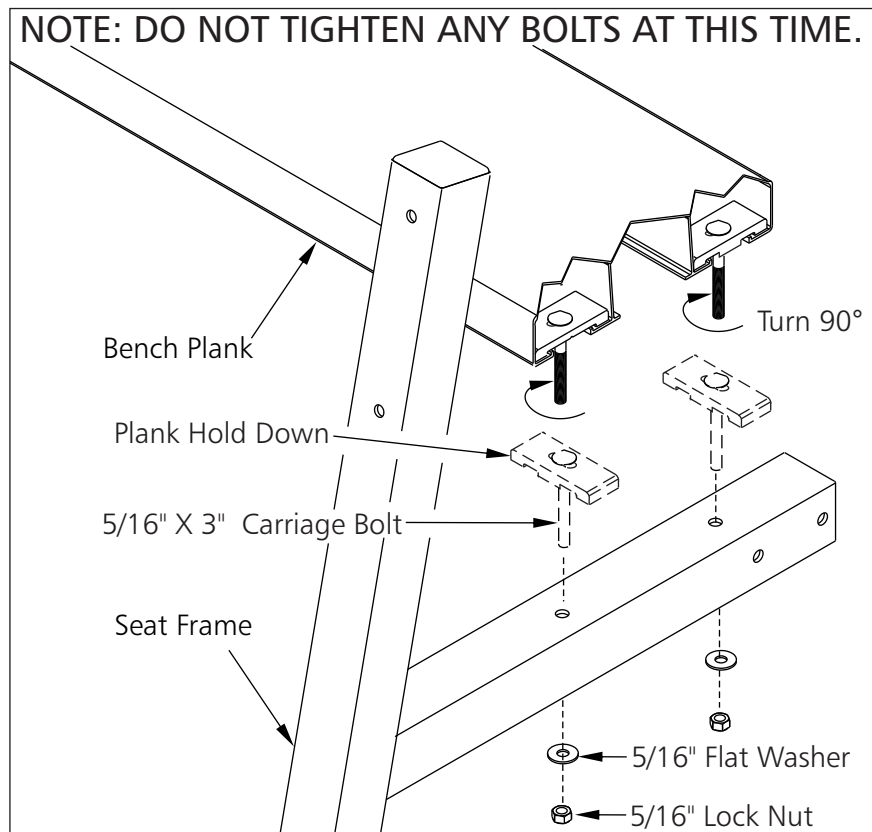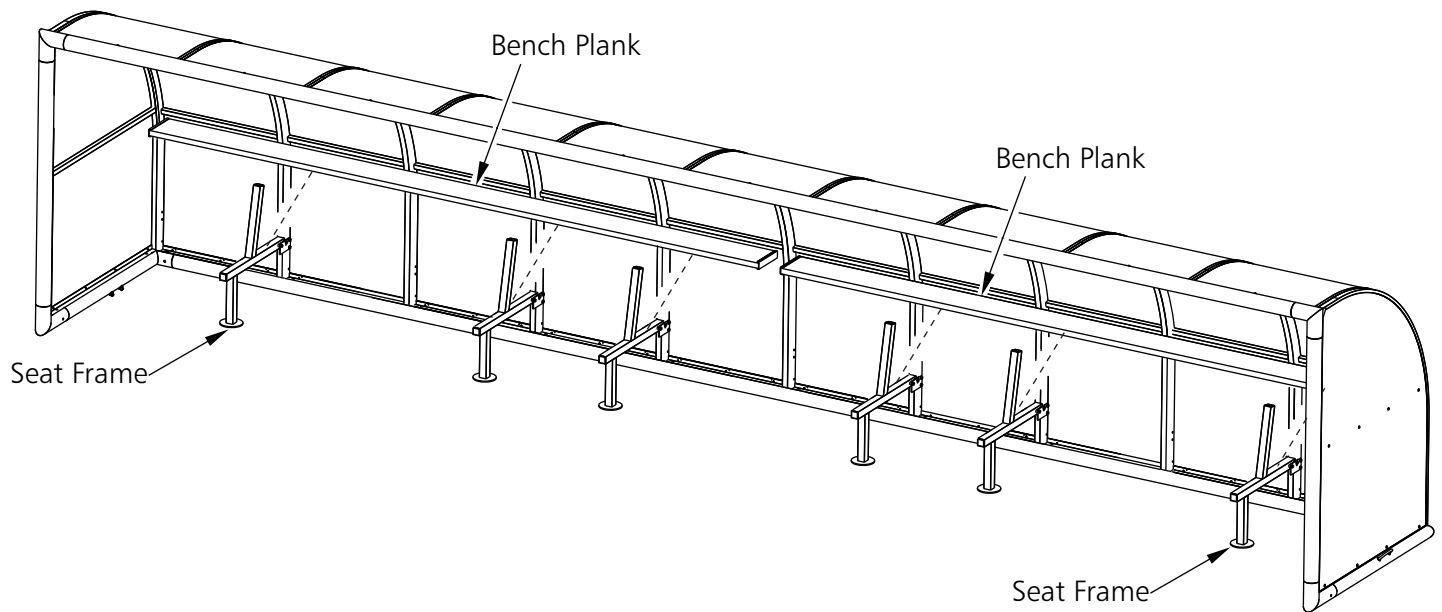


**THIS UNIT MUST BE ANCHORED ACCORDING TO THESE INSTRUCTIONS AT ALL TIMES**

**▲WARNING**

THIS EQUIPMENT MUST BE STORED IN A SECURED, SHELTERED AREA WHEN NOT IN USE OR IN THE THREAT OF HIGH WINDS. ANY WEATHER DAMAGE TO THIS EQUIPMENT WILL NOT BE COVERED UNDER KWIK GOAL'S PRODUCT GUARANTEE. DO NOT LEAVE THIS EQUIPMENT UNATTENDED.

15. Center and attach second bench plank to seat frames, also attach seat support to second bench plank at locations shown, do not overtighten bolts.

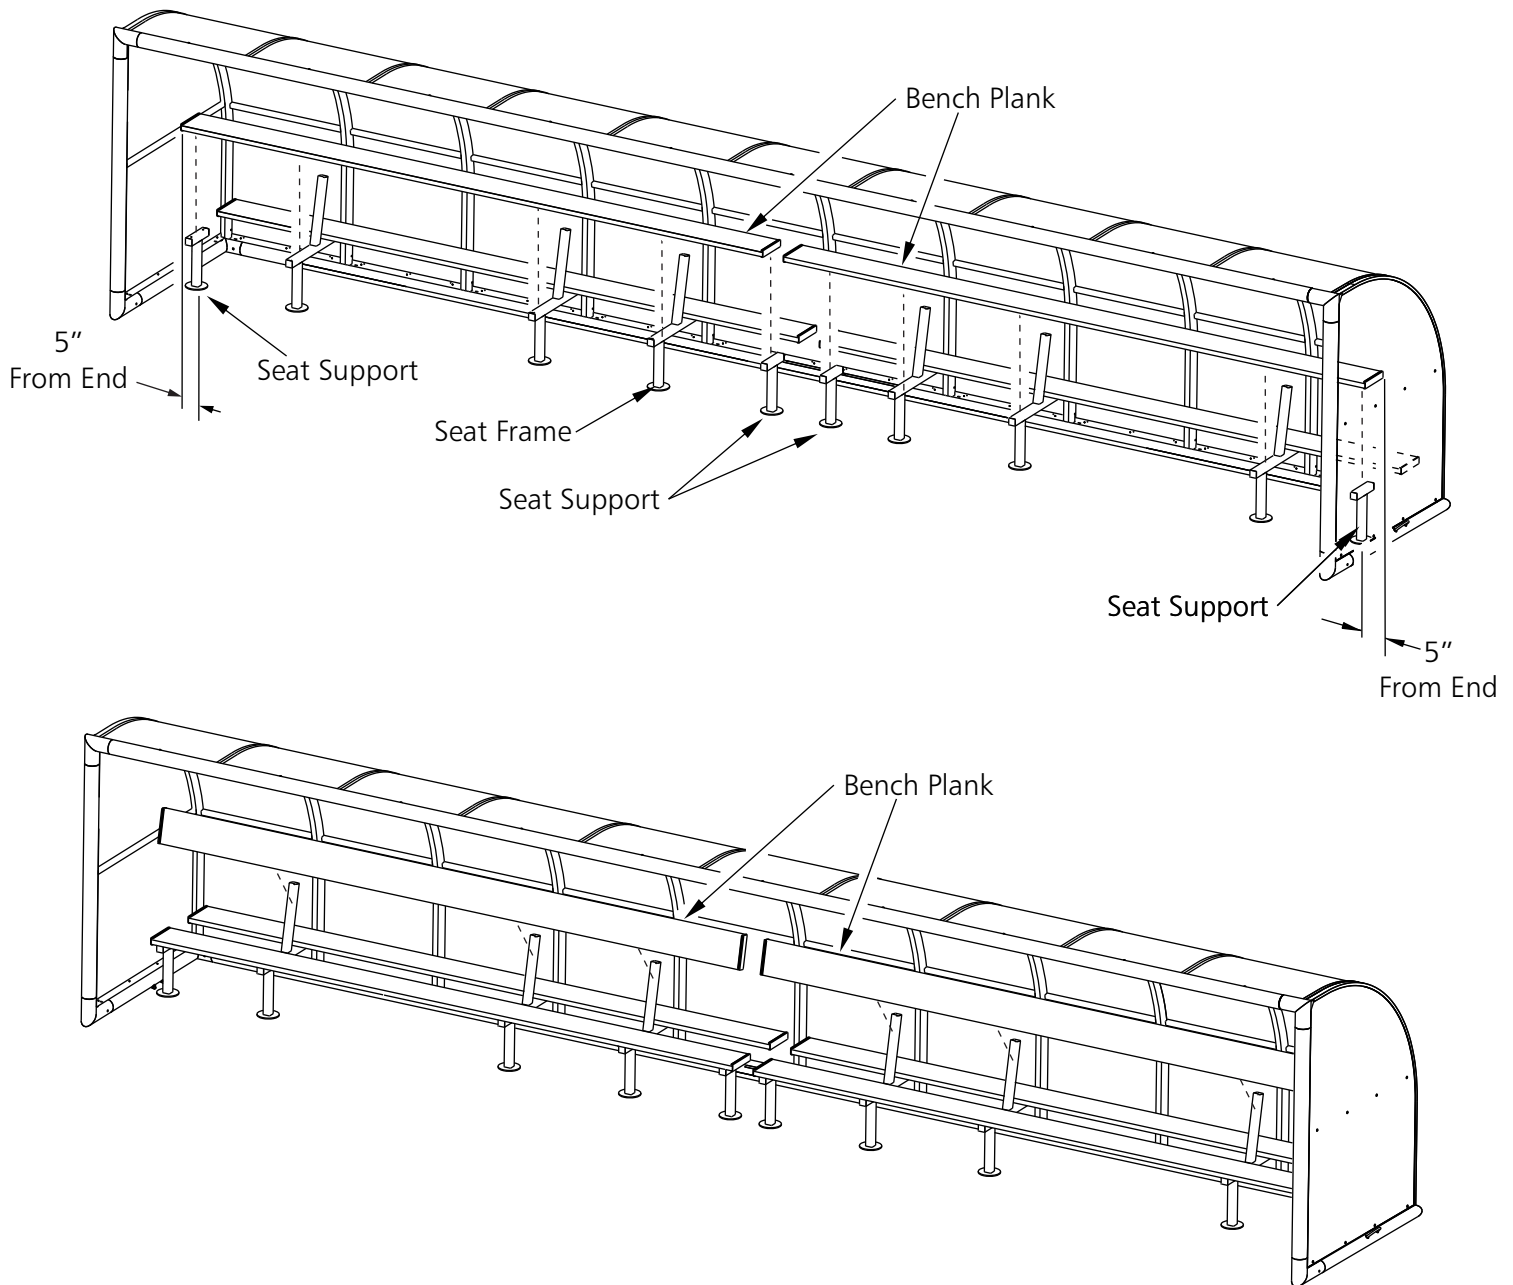


16. Attach third bench plank to seat frames. After all bench planks are attached to seat frames, square up and center all bench planks then tighten all bolts. Do not overtighten bolts.

**THIS UNIT MUST BE ANCHORED ACCORDING TO THESE INSTRUCTIONS AT ALL TIMES**

**▲WARNING**

THIS EQUIPMENT MUST BE STORED IN A SECURED, SHELTERED AREA WHEN NOT IN USE OR IN THE THREAT OF HIGH WINDS. ANY WEATHER DAMAGE TO THIS EQUIPMENT WILL NOT BE COVERED UNDER KWIK GOAL'S PRODUCT GUARANTEE. DO NOT LEAVE THIS EQUIPMENT UNATTENDED.

17. Be sure Shelter is properly anchored according to 9B51 Shelter Frame Instructions.

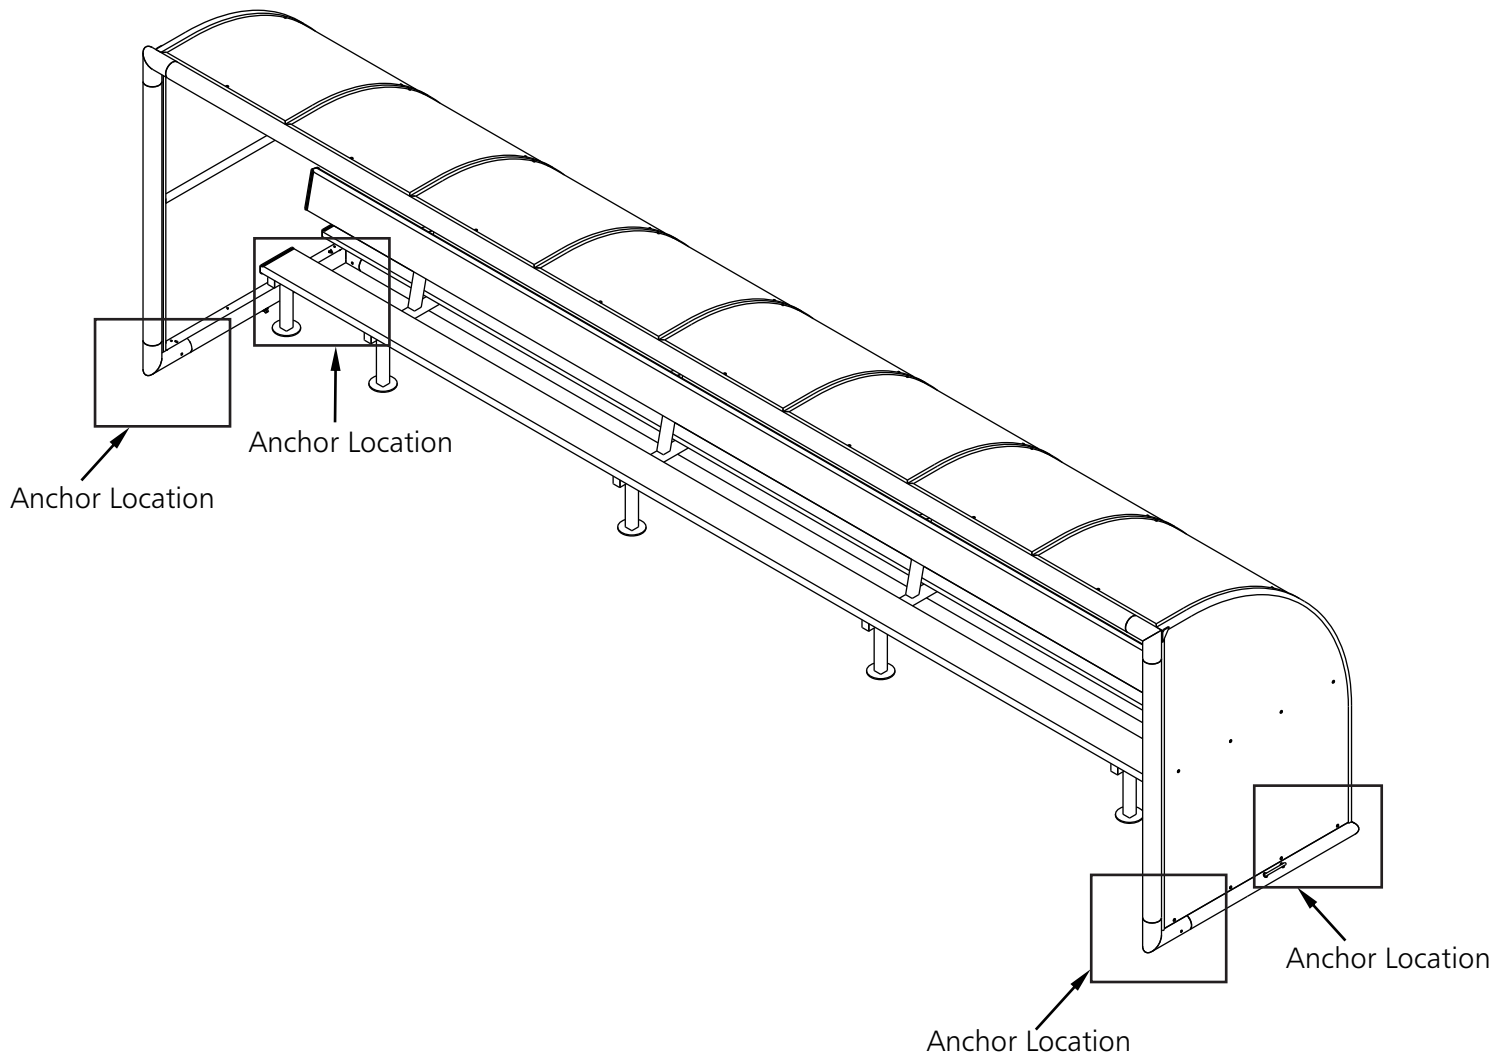

Go to [kwikgoal.com](http://kwikgoal.com) for additional product information.

**THIS UNIT MUST BE ANCHORED ACCORDING TO THESE INSTRUCTIONS AT ALL TIMES**

**⚠ WARNING**

THIS EQUIPMENT MUST BE STORED IN A SECURED, SHELTERED AREA WHEN NOT IN USE OR IN THE THREAT OF HIGH WINDS. ANY WEATHER DAMAGE TO THIS EQUIPMENT WILL NOT BE COVERED UNDER KWIK GOAL'S PRODUCT GUARANTEE. DO NOT LEAVE THIS EQUIPMENT UNATTENDED.