



**BASEBALL & SOFTBALL**

**SCOREBOARDS**



# MODEL 1610

**Size:** 10' x 4' x 8" (3.05 x 1.22 x .20 meters)


**Approximate hanging weight:** 130 lbs. (60 kg)

**Digit Size:** 18" **Digit Color:** High Intensity Red, Amber, or Translucent White

\*Translucent White LEDs cannot be intermixed with other digit colors on one scoreboard

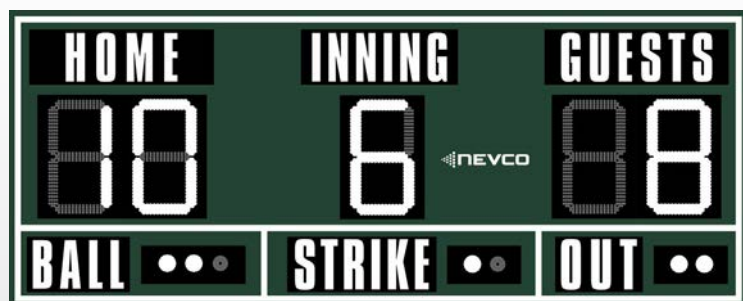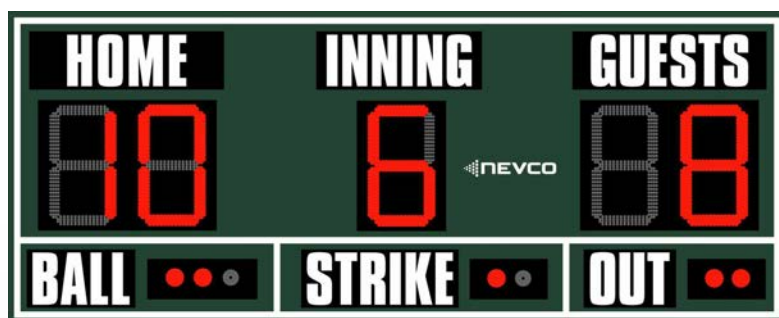

SHOWN WITH OPTIONAL WHITE LEDs

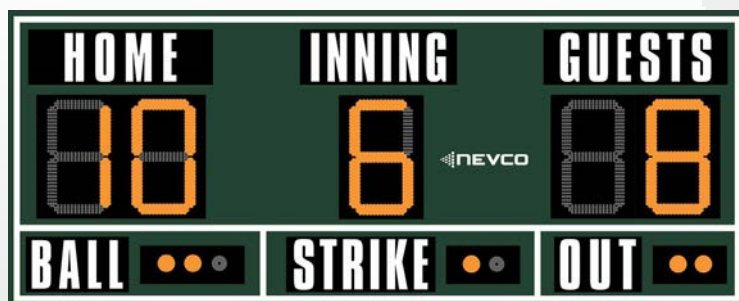

## Small scoreboard designed for combination Baseball/Softball facilities.

- Designed to withstand wind load speed zones exceeding 150 mph.
- Operate wired or wireless.
- Bright, long lasting, energy efficient LEDs.
- Gasketed digits reduces water intake.
- Flush sign mounting.

Combine your scoreboard with a Nevco monochrome or full-color message center to create a complete scoring and display system. Team/Sponsor signs also available.



MAXIMIZE YOUR IMPACT®

BUILD YOUR OWN DISPLAY AND SCORING SYSTEM ONLINE AT:

**WWW.NEVCO.COM**

U.S. & CANADA: 800-851-4040 INTERNATIONAL: 618-664-0360

FAX: 618-664-0398 E-MAIL: INFO@NEVCO.COM

# INTEGRATED DISPLAY AND SCORING SOLUTIONS



## Model 1610 (Outdoor) Baseball/Softball Scoreboard

### SCOREBOARD/CONTROL OPERATING FEATURES

MODEL 1610	MPC(W)-4/5/6	MPCW WIRELESS	MPCX <sub>2</sub> WIRELESS
<b>TEAM SCORES</b> 18" High Intensity Red, Amber, or Translucent White LED Digits	Displays 0-99.	Displays 0-99.	Displays 0-99.
<b>INNING</b> 18" High Intensity Red, Amber, or Translucent White LED Digits	Displays 0-9.	Displays 0-9.	Displays 0-9.
<b>INDICATORS</b> 2" diameter High Intensity Red, Amber, or Translucent White LED cluster	Three for ball. Two for strike. Two for Out.	Three for ball. Two for strike. Two for Out.	Three for ball. Two for strike. Two for Out.
<b>PITCH COUNT</b>	N/A	Supported. Integrates with PCD display. Controlled by hand-held switches.	Supported. Integrates with PCD display. Requires Pitch Count MPCX <sub>2</sub> control.
<b>PITCH TIMER</b>	N/A	Supported. Integrates with 9520 display. Controlled by hand-held switches.	Supported. Integrates with 9520 display. Requires SCD/DGT MPCX <sub>2</sub> control.

In addition to the standard 15 colors, Nevco can match any PMS color. Please contact your local Display and Scoring Consultant for pricing information.



**AGENCY APPROVAL:** UL/CUL listed, FCC, CE, INDUSTRY CANADA.

**SCOREBOARD:** Size 10'L x 4'H x 8"D (3.05 x 1.22 x .20 meters), constructed of aluminum. Scoreboard has 1" white outline striping. Hanging weight approximately 130 lbs. (60 kg).

**CAPTIONS:** HOME, GUESTS, INNING, BALL, STRIKE, OUT, white letters 8" high.

**LED UNITS:** Seven-bar segmented digits with protective aluminum cover.

**POWER (RED/AMBER):** 120 VAC, .7 Amps, 50/60 Hz. / 240 VAC, .3 Amps, 50/60 Hz. Requires earth ground.

**POWER (TRANSLUCENT WHITE):** 120 VAC, 1.2 Amps, 50/60 Hz. / 240 VAC, 0.6 Amps, 50/60 Hz. Requires earth ground.

**BUILT-IN LIGHTNING PROTECTION:** All models feature fiber-optic isolation circuitry providing additional protection against lightning strikes.

**GUARANTEE:** TO VIEW OR RECEIVE THE MOST RECENT COPY OF OUR GUARANTEE, PLEASE VISIT: [NEVCO.COM/WARRANTY-LIMITATION/](http://NEVCO.COM/WARRANTY-LIMITATION/)

**U.S. SERVICE:** 1-800-851-4040

**INTERNATIONAL SERVICE:** 1-618-664-0360

**CANADA SERVICE:** 1-800-461-8550



MAXIMIZE YOUR IMPACT®

BUILD YOUR OWN DISPLAY AND SCORING SYSTEM ONLINE AT:  
[WWW.NEVCO.COM](http://WWW.NEVCO.COM)

U.S. & CANADA: 800-851-4040 INTERNATIONAL: 618-664-0360

FAX: 618-664-0398 E-MAIL: [INFO@NEVCO.COM](mailto:INFO@NEVCO.COM)