



BASEBALL & SOFTBALL



SCOREBOARDS

MODEL 1625


Size: 10' x 5' x 8" (3.05 x 1.52 x .20 meters)

Approximate hanging weight: 160 lbs. (73 kg)

Digit Size: 18" **Digit Color:** High Intensity Red, Amber, or Translucent White

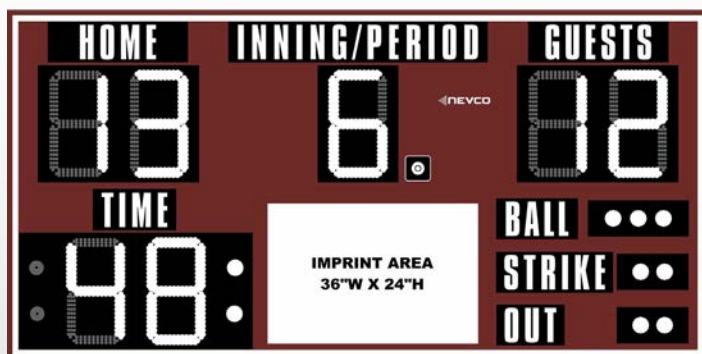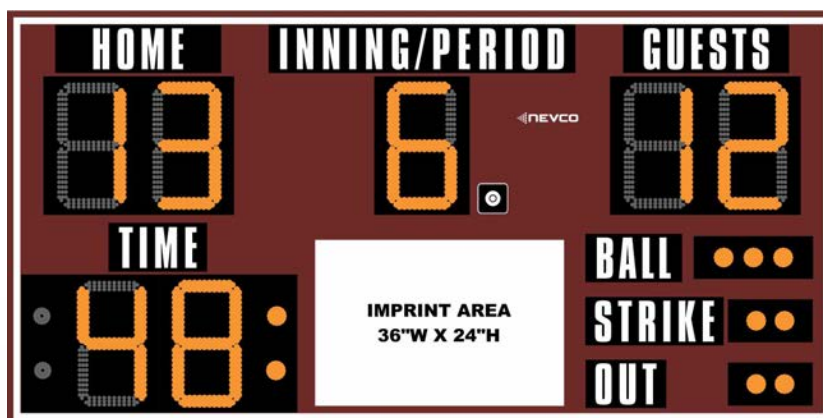

SHOWN WITH OPTIONAL WHITE LEDS

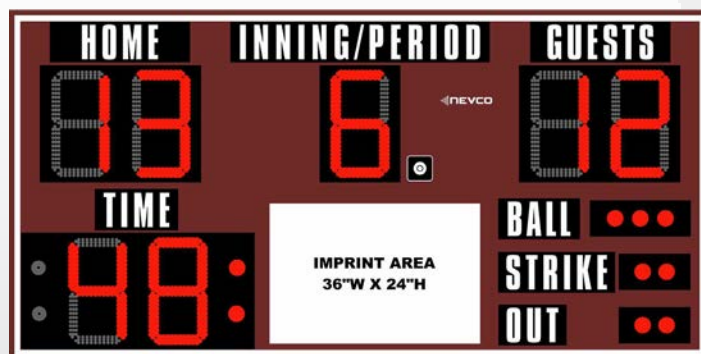

Scoreboard ideal for Baseball/Softball/Soccer facilities.

- Designed to withstand wind load speed zones exceeding 150 mph.
- Operate wired or wireless.
- Bright, long lasting, energy efficient LEDs.
- Gasketed digits reduces water intake.
- Flush sign mounting.

* **Translucent White LEDs cannot be intermixed with other digit colors on one scoreboard**



MAXIMIZE YOUR IMPACT®

BUILD YOUR OWN DISPLAY AND SCORING SYSTEM ONLINE AT:
WWW.NEVCO.COM

U.S. & CANADA: 800-851-4040 INTERNATIONAL: 618-664-0360
FAX: 618-664-0398 E-MAIL: INFO@NEVCO.COM

INTEGRATED DISPLAY AND SCORING SOLUTIONS



Model 1625 (Outdoor) Baseball/Softball/Soccer Scoreboard SCOREBOARD/CONTROL OPERATING FEATURES

| MODEL 1625 | MPC(W)-4/5/6 | MPCW WIRELESS | MPCX ₂ WIRELESS |
|--|--|--|--|
| TIMING 18" High Intensity Red, Amber, or Translucent White LED Digits | Displays on two digits. Bi-directional UP or DOWN count. Any number can be set between 0:00-99:59. Minutes are displayed until clock reads below one minute, then seconds are displayed. When time is off, time alternately displays minutes and seconds. When the minutes are counting down, the right colon light blinks each second, top right colon light blinks if in first 30 seconds, bottom right colon blinks if in last 30 seconds. Time numerals turn off at :00. | Displays on two digits. Bi-directional UP or DOWN count. Any number can be set between 0:00-99:59. Minutes are displayed until clock reads below one minute, then seconds are displayed. When time is off, time alternately displays minutes and seconds. When the minutes are counting down, the right colon light blinks each second, top right colon light blinks if in first 30 seconds, bottom right colon blinks if in last 30 seconds. Time numerals turn off at :00. | Displays on two digits. Bi-directional UP or DOWN count. Any number can be set between 0:00-99:59. Minutes are displayed until clock reads below one minute, then seconds are displayed. When time is off, time alternately displays minutes and seconds. When the minutes are counting down, the right colon light blinks each second, top right colon light blinks if in first 30 seconds, bottom right colon blinks if in last 30 seconds. Time numerals turn off at :00. |
| TEAM SCORES 18" High Intensity Red, Amber, or Translucent White LED Digits | Displays 0-99 | Displays 0-99 | Displays 0-99 |
| INNING/PERIOD 18" High Intensity Red, Amber, or Translucent White LED Digits | Displays 0-9 | Displays 0-9 | Displays 0-9 |
| INDICATORS 3" diameter High Intensity Red, Amber, or Translucent White LED cluster | THREE FOR BALL TWO FOR STRIKE TWO FOR OUT | BASEBALL: THREE FOR BALL TWO FOR STRIKE TWO FOR OUT | BASEBALL: THREE FOR BALL TWO FOR STRIKE TWO FOR OUT |
| H OR E For hit or error | Displays H or E using the Inning LED unit. | BASEBALL: Displays H or E using the Inning LED unit. | BASEBALL: Displays H or E using the Inning LED unit. |
| HORN | Sounds automatically at 0:00 for a minimum of two (2) seconds. May omit automatic horn. Can sound manually at any time. | Sounds automatically at 0:00 for a minimum of two (2) seconds. May omit automatic horn. Can sound manually at any time. | Sounds automatically at 0:00 for a minimum of two (2) seconds. Can sound manually at any time. |
| PITCH COUNT | N/A | Supported. Integrates with PCD display. Controlled by hand-held switches. | Supported. Integrates with PCD display. Requires Pitch Count MPCX ₂ control. |
| PITCH TIMER | N/A | Supported. Integrates with 9520 display. Controlled by hand-held switches. | Supported. Integrates with 9520 display. Requires SCD/DGT MPCX ₂ control. |

In addition to the standard 15 colors, Nevco can match any PMS color. Please contact your local Display and Scoring Consultant for pricing information.

| | | | | | | | | | | | | | | |
|-------------------------|---------------|------------------------|-------------------------|------------------------|------------------------|----------------------|---------------------------|-----------------------|--------------------------|----------------------|--------------------------|----------------------|-----------------------|-----------------------|
| #103 Cardinal Red | #73 Maroon | #102 Team Orange | #99 Golden Yellow | #142 Kelly Green | #74 Forest Green | #120 Teal Blue | #72 Electronic Blue | #140 Royal Blue | #121 Midnight Blue | #141 Navy Blue | #104 Medium Purple | #70 Desert Tan | #95 Silver Gray | #76 Print Black |
|-------------------------|---------------|------------------------|-------------------------|------------------------|------------------------|----------------------|---------------------------|-----------------------|--------------------------|----------------------|--------------------------|----------------------|-----------------------|-----------------------|

AGENCY APPROVAL: UL/CUL listed, FCC, CE, INDUSTRY CANADA.

SCOREBOARD: Size 10'L x 5'H x 8"D (3.05 x 1.52 x .20 meters), constructed of aluminum. Scoreboard has 1" white outline striping. Hanging weight approximately 160 lbs. (73 kg).

CAPTIONS: HOME, GUESTS, INNING/PERIOD, TIME, BALL, STRIKE, OUT, white 6" high.

SPONSOR AREA: 3'x2' available sponsorship area.

LED UNITS: Seven-bar segmented digits with protective aluminum cover.

POWER (RED/AMBER): 120 VAC, 1.1 Amps, 50/60 Hz. / 240 VAC, 0.5 Amps, 50/60 Hz. Requires earth ground.

POWER (TRANSLUCENT WHITE): 120 VAC, 1.7 Amps, 50/60 Hz. / 240 VAC, 0.9 Amps, 50/60 Hz. Requires earth ground.

BUILT-IN LIGHTNING PROTECTION: All models feature fiber-optic isolation circuitry providing additional protection against lightning strikes.

GUARANTEE: TO VIEW OR RECEIVE THE MOST RECENT COPY OF OUR GUARANTEE, PLEASE VISIT: NEVCO.COM/WARRANTY-LIMITATION/
U.S. SERVICE: 1-800-851-4040 **INTERNATIONAL SERVICE:** 1-618-664-0360 **CANADA SERVICE:** 1-800-461-8550



BUILD YOUR OWN DISPLAY AND SCORING SYSTEM ONLINE AT:

WWW.NEVCO.COM

U.S. & CANADA: 800-851-4040 INTERNATIONAL: 618-664-0360

FAX: 618-664-0398 E-MAIL: INFO@NEVCO.COM