




FOOTBALL

SCOREBOARDS

MODEL 3602

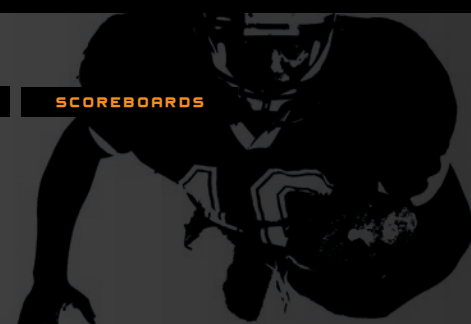

Size: 12' x 5' x 8" (3.66 x 1.52 x .20 meters)

Approximate hanging weight: 180 lbs. (82 kg) **with ETNs:** 235 lbs. (107 kg)

Digit Size: 18" **Digit Color:** High Intensity Red, Amber, or Translucent White



SHOWN WITH OPTIONAL WHITE LEDS



SHOWN WITH OPTIONAL ELECTRONIC TEAM NAMES

Advanced timing features ideal for Soccer, Football, Field Hockey and Lacrosse facilities.

- Operate wired or wireless.
- Bright, long lasting, energy efficient LEDs.
- Gasketed digits reduces water intake.
- Designed to withstand wind load speed zones exceeding 150 mph.
- Includes built-in horn.
- Lighted time colon and decimal; automatically adjusts to 1/10th of a second.

* **Translucent White LEDs cannot be intermixed with other digit colors on one scoreboard**



MAXIMIZE YOUR IMPACT®

BUILD YOUR OWN DISPLAY AND SCORING SYSTEM ONLINE AT:
WWW.NEVCO.COM

U.S. & CANADA: 800-851-4040 INTERNATIONAL: 618-664-0360
FAX: 618-664-0398 E-MAIL: INFO@NEVCO.COM

INTEGRATED DISPLAY AND SCORING SOLUTIONS



Model 3602 (Outdoor) Soccer/Football/Field Hockey/Lacrosse Scoreboard

SCOREBOARD/CONTROL OPERATING FEATURES

MODEL 3602	MPC(W)-4/5/6	MPCW-7	MPCX ₂ WIRELESS
TIMING 18" High Intensity Red, Amber, or Translucent White LED Digits	Bi-directional UP or DOWN count. Any number can be set between 0:00-99:59. 1/10th seconds display during final minute.	Bi-directional UP or DOWN count. Any number can be set between 0:00-99:59. 1/10th seconds display during final minute.	Bi-directional UP or DOWN count. Any number can be set between 0:00-99:59. 1/10th seconds display during final minute.
TEAM SCORES 18" High Intensity Red, Amber, or Translucent White LED Digits	Displays 0-99	Displays 0-99	Displays 0-99
PERIOD 18" High Intensity Red, Amber, or Translucent White LED Digits	Displays 0-9	Displays 0-9	Displays 0-9
TIME OF DAY	In place of displaying game time on the scoreboard, the "time out" time may be displayed or the "time of day".	In place of displaying game time on the scoreboard, the "time out" time may be displayed or the "time of day".	N/A
HORN	Sounds automatically at 0:00 for a minimum of two (2) seconds. May omit automatic horn. Can sound manually at any time.	Sounds automatically at 0:00 for a minimum of two (2) seconds. May omit automatic horn. Can sound manually at any time.	Sounds automatically at 0:00 for a minimum of two (2) seconds. May omit automatic horn. Can sound manually at any time.
JUNCTION BOX	One (1) 4" x 2 1/8" x 2 1/8" with cover, to be installed in dry location (press box), furnished.	N/A	N/A
CONTROL CABLE	One (1) length required of 2-WIRE (coaxial type) 1/4" diameter. Order length required.	N/A	N/A
SEGMENT TIMING	Supported.	Supported.	Requires MPCX ₂ segment timer control.

In addition to the standard 15 colors, Nevco can match any PMS color. Please contact your local Display and Scoring Consultant for pricing information.

#103 Cardinal Red	#73 Maroon	#102 Team Orange	#99 Golden Yellow	#142 Kelly Green	#74 Forest Green	#120 Teal Blue	#72 Electronic Blue	#140 Royal Blue	#121 Midnight Blue	#141 Navy Blue	#104 Medium Purple	#70 Desert Tan	#95 Silver Gray	#76 Print Black
-------------------------	---------------	------------------------	-------------------------	------------------------	------------------------	----------------------	---------------------------	-----------------------	--------------------------	----------------------	--------------------------	----------------------	-----------------------	-----------------------

AGENCY APPROVAL: UL/CUL listed, FCC, CE, INDUSTRY CANADA.

SCOREBOARD: Size 12'L x 5'H x 8"D (3.66 x 1.52 x .20 meters), constructed of aluminum. Scoreboard has 1" white outline striping. Four (4) brackets provided for mounting. Hanging weight approximately 180 lbs. (82 kg) with ETNs 235 lbs. (107 kg).

CAPTIONS: HOME, GUESTS, MIN, SEC, PERIOD, white 10" high. (HOME and GUESTS are omitted when ordered with ETNs.)

LED UNITS: Seven-bar segmented digits with protective aluminum cover.

POWER WITHOUT ETNS (RED/AMBER): 120 VAC, 1.2 Amps, 50/60 Hz. / 240 VAC, 0.6 Amps, 50/60 Hz. Requires earth ground.

POWER WITH ETNS (RED/AMBER): 120 VAC, 2.2 Amps, 50/60 Hz. / 240 VAC, 1.1 Amps, 50/60 Hz. Requires earth ground.

POWER WITHOUT ETNS (TRANSLUCENT WHITE): 120 VAC, 2.1 Amps, 50/60 Hz. / 240 VAC, 1.0 Amps, 50/60 Hz. Requires earth ground.

POWER WITH ETNS (TRANSLUCENT WHITE): 120 VAC, 3.0 Amps, 50/60 Hz. / 240 VAC, 1.5 Amps, 50/60 Hz. Requires earth ground.

BUILT-IN LIGHTNING PROTECTION: All models feature fiber-optic isolation circuitry providing additional protection against lightning strikes.

GUARANTEE: TO VIEW OR RECEIVE THE MOST RECENT COPY OF OUR GUARANTEE, PLEASE VISIT: NEVCO.COM/WARRANTY-LIMITATION/

U.S. SERVICE: 1-800-851-4040

INTERNATIONAL SERVICE: 1-618-664-0360

CANADA SERVICE: 1-800-461-8550



MAXIMIZE YOUR IMPACT®

BUILD YOUR OWN DISPLAY AND SCORING SYSTEM ONLINE AT:
WWW.NEVCO.COM

U.S. & CANADA: 800-851-4040 INTERNATIONAL: 618-664-0360
FAX: 618-664-0398 E-MAIL: INFO@NEVCO.COM