

— Instruction Manual —

SHCLKBKTW

WALL MOUNT SHOT CLOCK BRACKET



Customer Service
(800) 247-7668

PARTS LIST

Item	Qty	Description	Item	Qty	Description
A	2	Shot Clock Bracket	D	8	3/8" Lock Washer (Packaged with Shot Clock)
B	2	Shot Clock Display Cabinet (Packaged Separately)	E	2	Wireless Remote Power Switch (Packaged with Shot Clock)
C	8	3/8-16 x 1" Hex Bolt (Packaged with Shot Clock)			

Warning!

Wall mount brackets require an acceptable wall mounting surface. Brick, block, or poured concrete walls are superior. It is inadvisable to mount brackets to walls with wood or steel studs unless additional work approved by a structural engineer is done to provide additional support. Bison does not provide wall anchors with any brackets. The purchaser assumes liability for the installation of any wall mounting brackets. Consult a professional architect, engineer or contractor to determine safe methods of installation to your facility's wall construction.

NOTE:


Bison does not provide hardware to attach the *Shot Clock Brackets (A)* to the customer's wall. Attachment method and type of anchor used are the responsibility of the installer.

- ♦ Inspect all contents prior to installation. Report any missing parts to dealer immediately.
- ♦ Read all instructions before proceeding.
- ♦ Save this instructions in the event that the manufacturer must be contacted in the future


NOTE:

This bracket is intended for use only with the Bison SHCLK200 Wireless Shot Clock Systems.

1. Mount the *Shot Clock Brackets (A)* to the walls at locations that can best be seen from the court by players and officials.
2. After installation of the *Shot Clock Brackets (A)* to the walls, place the *Shot Clock Display Cabinets (B)* on top of the *Shot Clock Brackets (A)* to prepare for installation.
3. Using *3/8-16 x 1" Hex Bolt (C)* and *3/8" Lock Washer (D)*, Install into the threaded inserts in the bottom of the *Shot Clock Display Cabinets (B)*. See Figure 1.
4. Position antennae on the *Shot Clock Display Cabinets (B)* so that it maximizes the line of sight to the location where the Shot Clock Control Panel is to be operated.

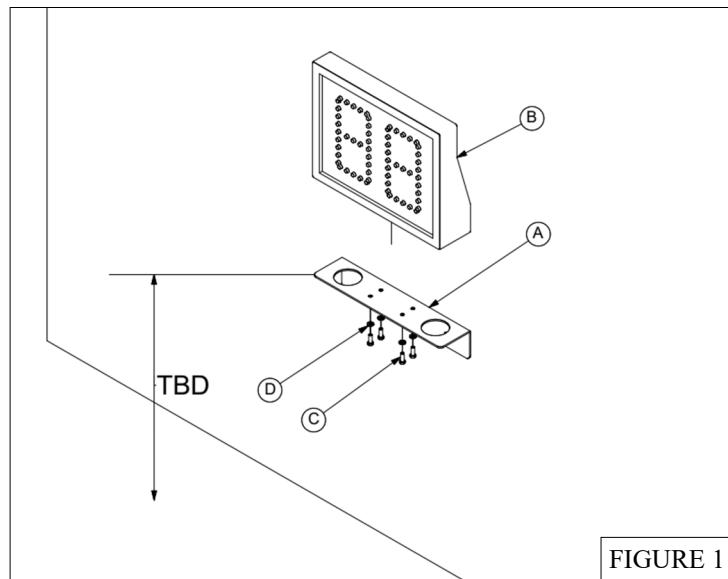

3. Each *Shot Clock Display Cabinet* (B) will require a 110-volt AC receptacle to provide power. A 30' long power cord is provided with each *Shot Clock Display Cabinet* (B). Once it is determined where the source of power is located, attach the power cord to the connector on the bottom of the *Shot Clock Display Cabinet* (B) and run the cord neatly to the 110-volt receptacle. If the 30' power cord is too long it is acceptable to shorten and reinstall a new male receptacle on the end.
4. An independent *Wireless Remote Power Switch* (E) is provided with each *Shot Clock Display Cabinet* (B). It should be installed between the 110-volt wall receptacle and the male power cord plug to allow power to be shut off to the *Shot Clock Display Cabinet* (B) using the hand held *Wireless Remote Power Switch* (E). See Figure 2.

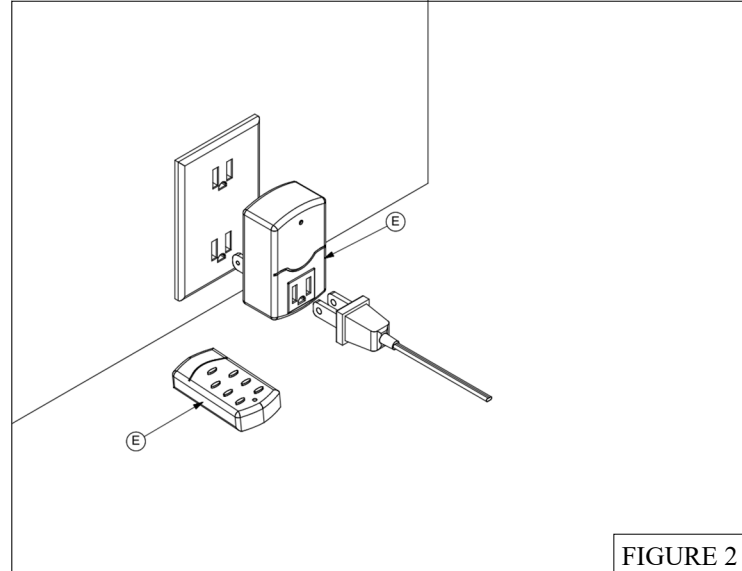

5. Additional operating instructions are included in the manual provided with the Shot Clock.