



SPORTS COOL FILTERED DRINK STATION

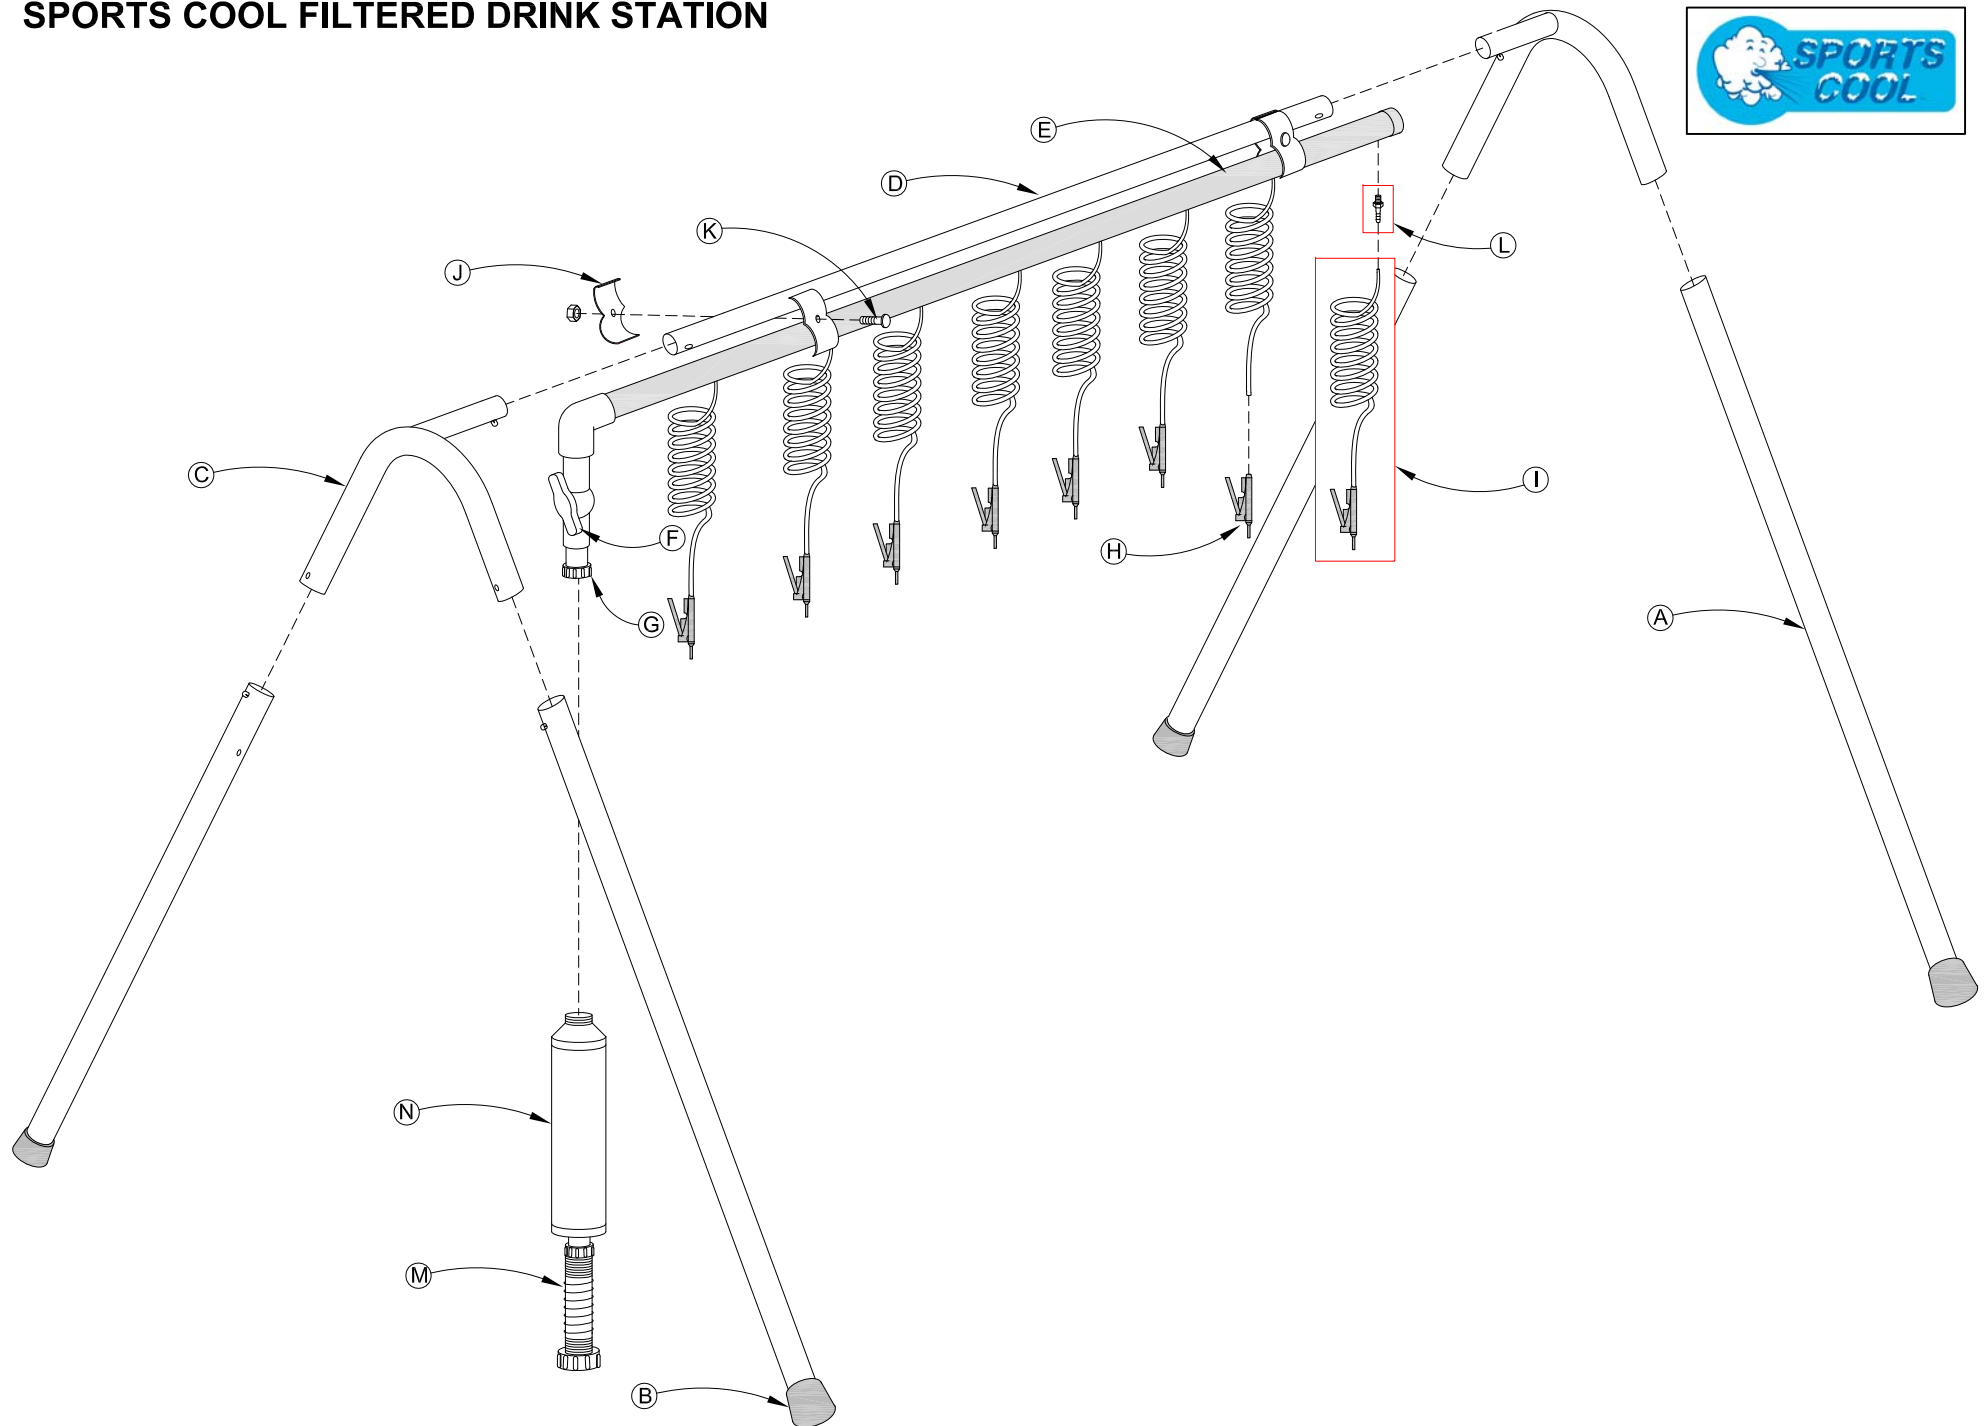

SPORTS COOL FILTERED DRINK STATION

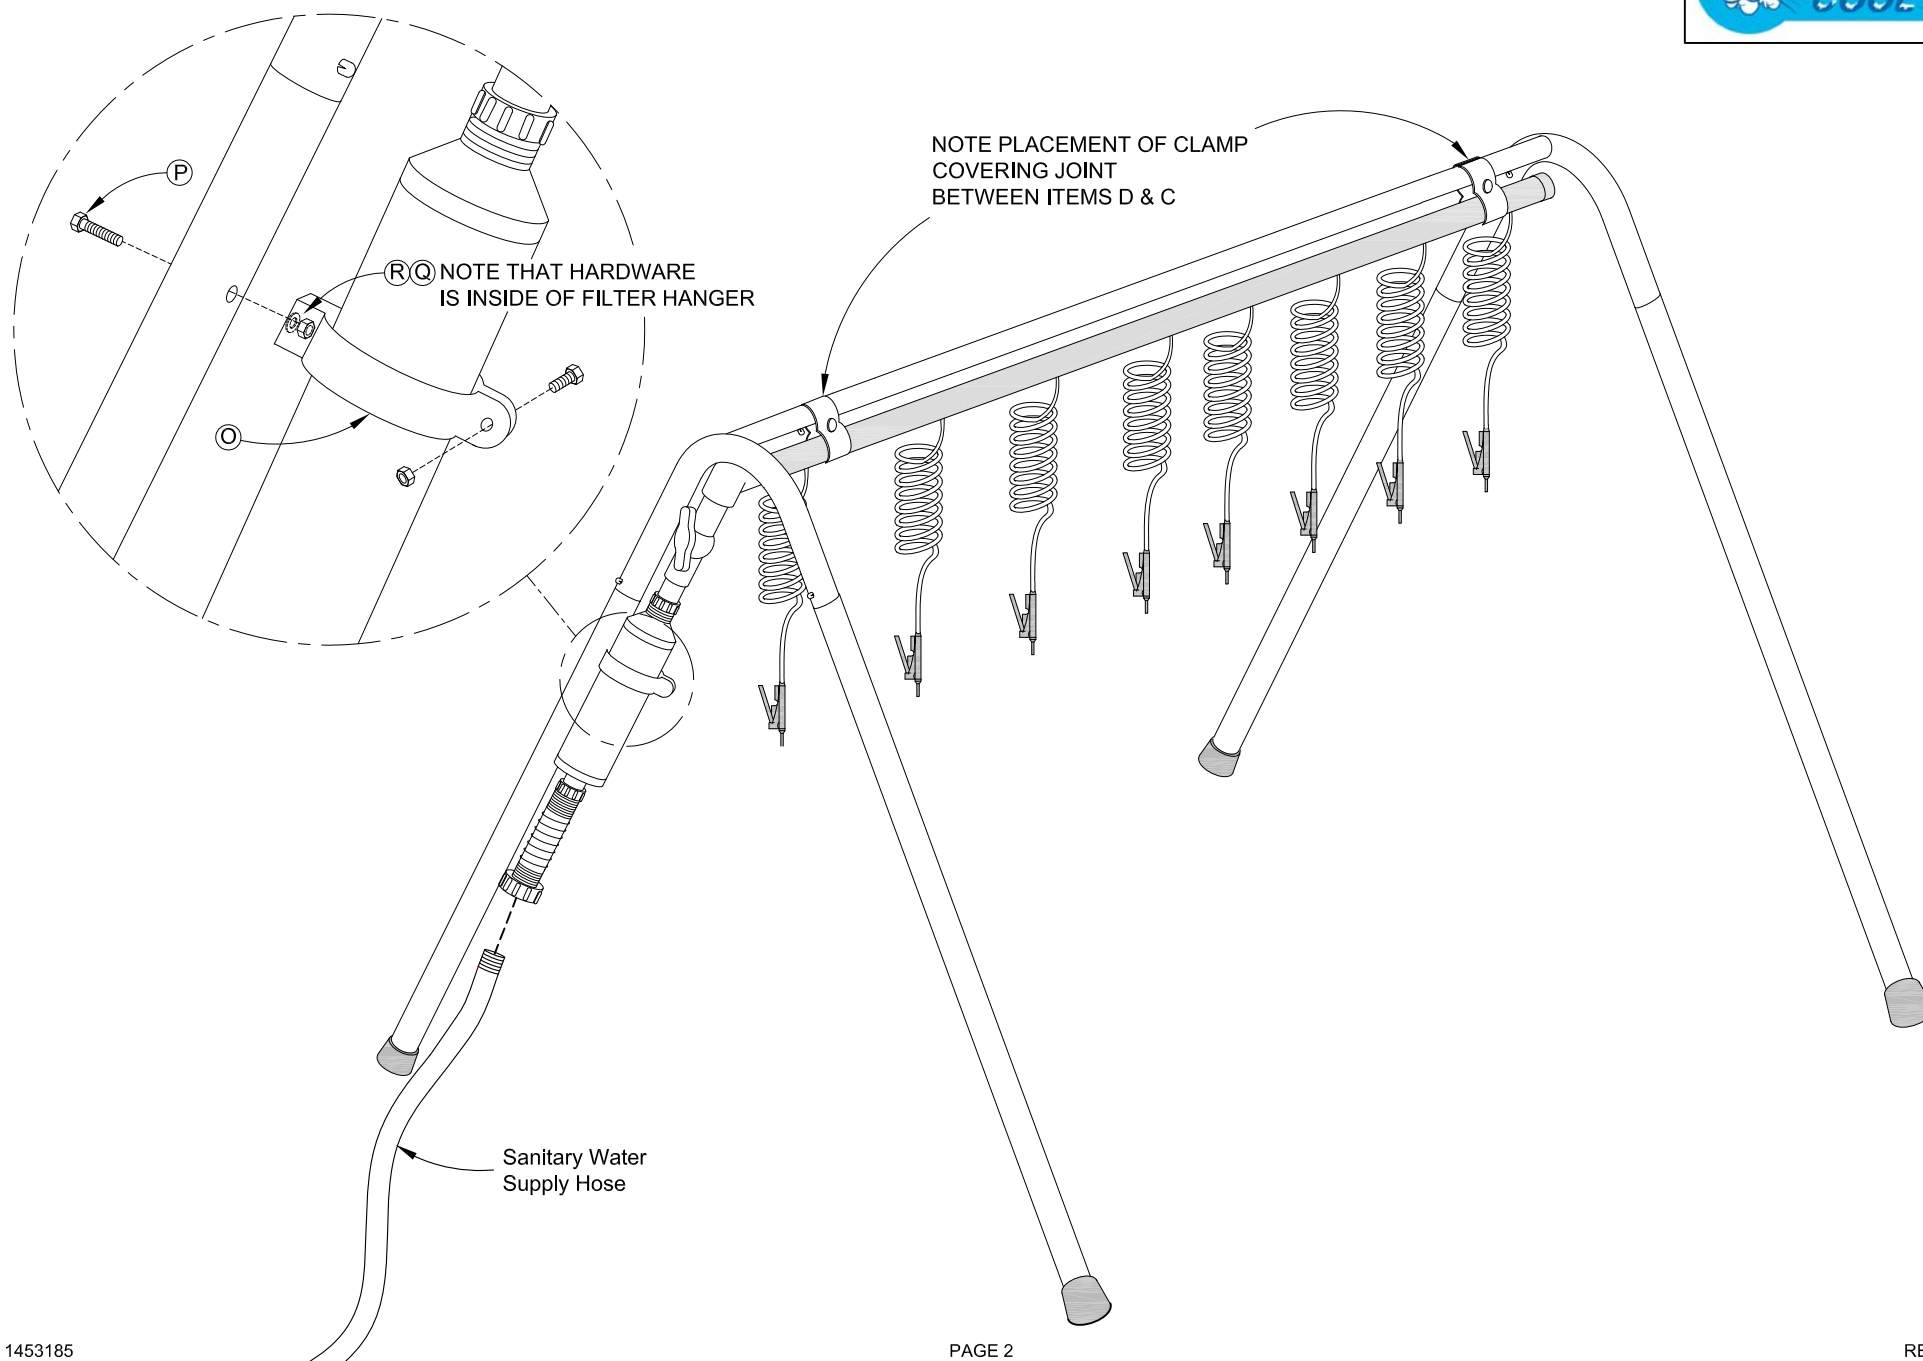

SPORTS COOL FILTERED DRINK STATION INSTRUCTIONS AND PARTS LIST



1. Assemble Legs **(A)** to Elbow Joints **(C)**.
2. Assemble Crossbar **(D)** to Elbow Joints.
3. Attach Water Manifold **(E)** to underside of Crossbar using Clamps **(J)**.
NOTE: Placement of Clamps is very important.
4. Attach item **(O)** Filter Hanger as shown. Only one leg has hole to accept Filter Hanger.
5. Attach Filter item **(N)** and Flexible Hose item **(M)** to the Filter Hanger as shown.
6. Attach Sanitary Water Supply Hose to item **(M)** Flexible Hose.
 - Pressure can be regulated by the Red Shut Off Valve **(F)**.
 - Before use - Sanitize drinking wands and flush system with clean water.
 - Optional - Can be used with Portable Water Chiller by Sports Cool.

ITEM	DESCRIPTION	QTY	PART NO.
A	LEGS (1 WITH HOLE)	4 EA.	
B	CRUTCH TIPS	4 EA.	ZX1530001
C	ELBOW JOINT	2 EA.	
D	CROSSBAR	1 EA.	
E	WATER MANIFOLD - COMP	1 EA.	ZDSMXA
F	SHUT OFF BALL VALVE	1 EA.	ZX3920066
G	FEMALE HOSE CONNECTOR	1 EA.	ZX3920073
H	SHUT OFF TRIGGER	8 EA.	SPCWAND
I	HOSE ASSEMBLY	8 EA.	SPCHOSEX
J	CLAMP	2 PR.	
K	CARRIAGE BOLT WITH NUT	2 EA.	
L	NYLON HOSE NIPPLE	8 EA.	ZX3920107
M	FLEXIBLE HOSE PROTECTOR	1 EA.	ZX3920094
N	FILTER	1 EA.	ZX3920095
O	FILTER HANGER	1 EA.	Z030HANGER
P	HEX BOLT .25 x 1.75	1 EA.	Z041250175
Q	LOCK NUT .25	1 EA.	Z060250XXX
R	FLAT WASHER .25	1 EA.	Z070025Z/P