
# 00999000 - JUDGE'S STAND

### FITTED JUDGE'S STAND

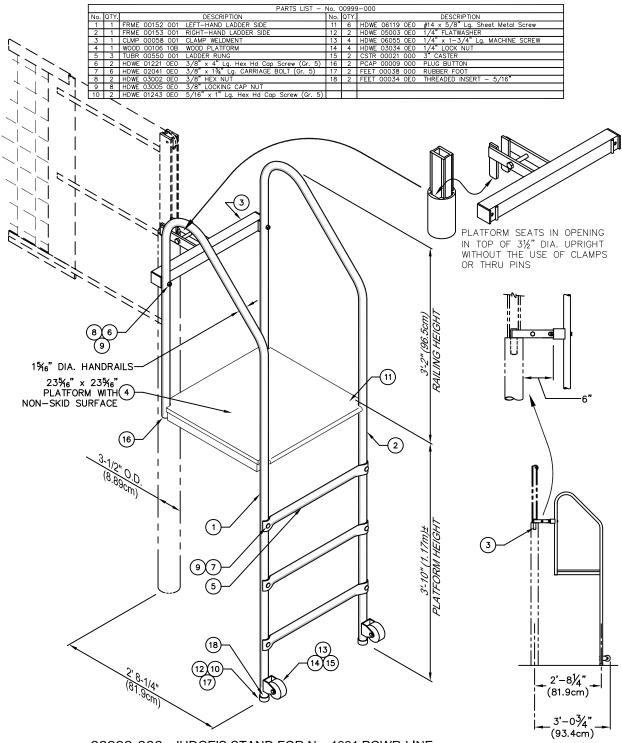

— 00999-000 JUDGE'S STAND FOR No. 1991 POWR-LINE

\_ – 9931xx

SET OF PROTECTIVE PADS FOR No. 00999-000 JUDGE'S STAND (CUSTOM COLORS AVAILABLE - SEE PAGE No. V-993-1)



PROJECT NUMBER

**PROJECT NAME** 

WWW.PORTERATHLETIC.COM/FACILITY .

**VOLLEYBALL SPECIFICATION SHEE**:

/-999

## 00999000 - JUDGE'S STAND

#### FITTED JUDGE'S STAND

#### **SPECIFICATIONS**

#### PORTER No. 00999-000 JUDGE'S STAND

Judge's Stand shall be designed with a special attachment fitting to seat in the cavities of the 3-1/2" (8.9cm) O.D. aluminum upright of the No. 1991, 1993, and 1995 Powr-Line® Volleyball Systems without the use of clamps, handwheels, locating pins or tools.

Platform support side frames shall consist of formed 1-5/16" (3.3cm) O.D. steel tube handrail/ladder sections with a heavy angle weldment for the support of the platform. Formed handrails shall extend 38" (96.5cm) above the platform. Three (3) special, formed, 1-5/16" (3.3cm) O.D. ladder rung sections shall be equally spaced to allow for ease of mounting platform. Lower end of ladder side frames shall be equipped with heavy-duty diameter, nonmarking rubber pads. Side frames are also equipped with 3" (7.6cm) diameter, non-marking caster wheels positioned for ease of tipping and transporting to storage areas. Side frames and ladder rungs shall be finished in a durable powder-coated finish.

Platform shall be 23-5/16" x 23-5/16" (59.2cm x 59.2cm), constructed of a high quality 3/4" (1.9cm) thick birch laminate, with a reinforced understructure. Platform shall be finished in a clear lacquer with a non-slip top surface. Top of platform shall be positioned 3'-10" (1.17m) above playing surface when in use.

#### OPTIONAL ITEMS TO SPECIFY

See Page No. V-993-1 for specifications on Porter No. 9931xx Set of Protective Pads.