




Most Kwik Goal products carry a **Lifetime Guarantee**. For details or claims, visit **kwikgoal.com** or contact customer service at 1-800-531-4252.


ASSEMBLY INSTRUCTIONS FOR 2B1602 AFR-2 REBOUNDER

- 1. Unpack all parts and check for damage that may have occurred during shipping. If damage has occurred, notify trucking company immediately. Lay out all parts. Remove all cardboard and packaging immediately. Wet or damp packaging may damage contents.
- 2. Read through entire instruction before beginning assembly and installation.

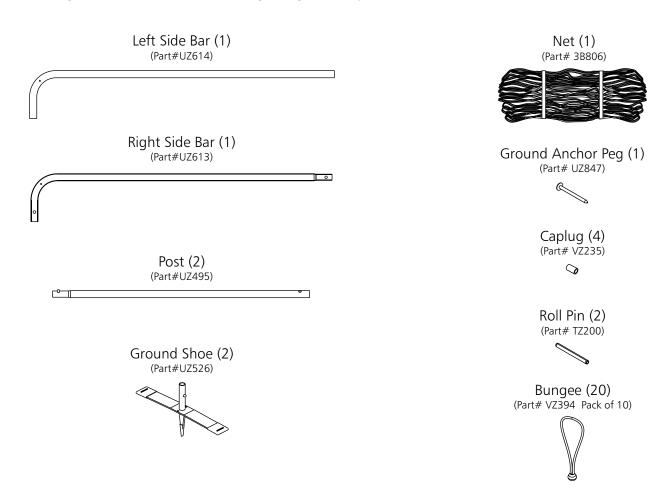


CAUTION

3. Connect right side bar and post, also connect left side bar and post as shown. Note: Do not connect right side bar and left side bar at this time.

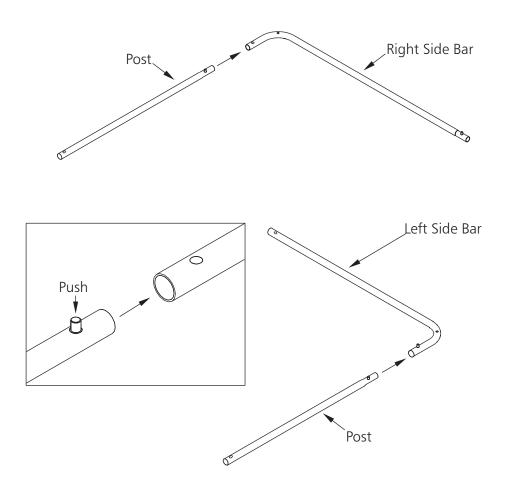


CAUTION

4. Using top corner tags as a guide, weave net on to right side bar as shown.

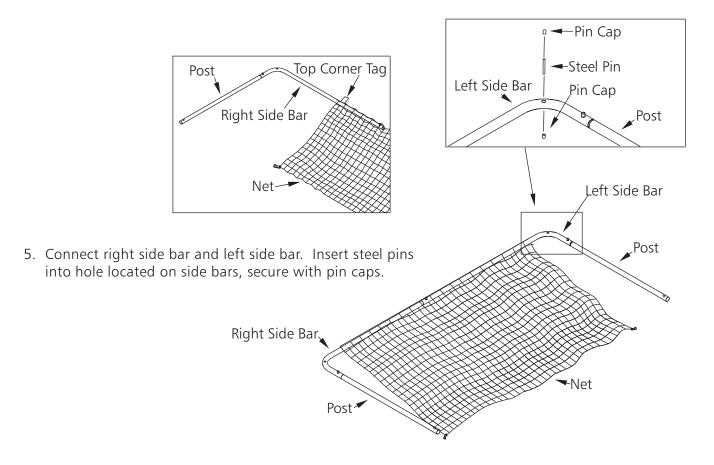

6. Attach ground shoes to posts. Connect clips located on net to ground shoes.

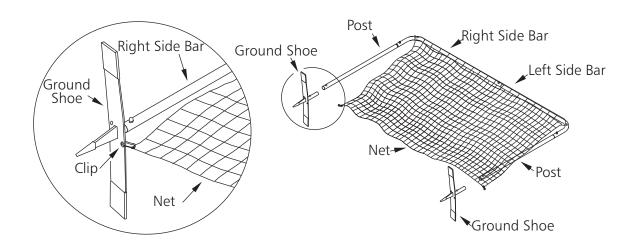



CAUTION


7. Stand assembled AFR- 2° in desired location and push ground shoes into field using foot pressure. Be sure to keep posts 90 ° to side bars. **CAUTION: NEVER USE HAMMER ON GROUND SHOE.** If soil conditions are hard, mark ground shoe location and make a pilot hole with pilot hole peg.

Ground Shoe

Proper use of Pilot Hole Peg







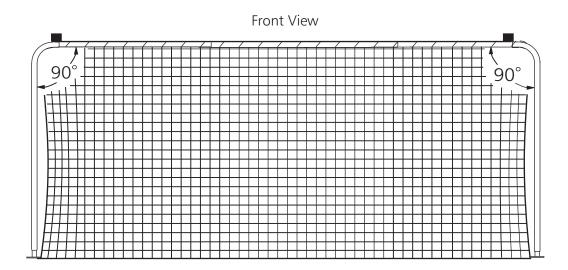



CAUTION


8. Attach bungees to net as shown. Evenly space 10 bungees down each post. Note: The addition of bungees while attaching the net may make the net appear small but it will stretch during installation.









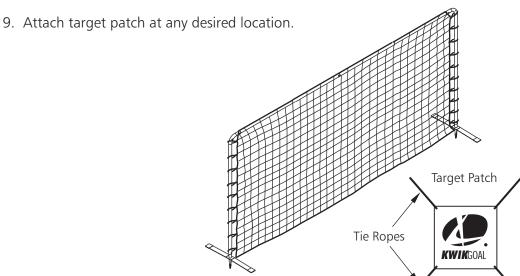

10. To disassemble, reverse assembly steps. Store AFR-2[®] goal in a safe place. Carry bag is available for your AFR-2[®], see our catalog or online at kwikgoal.com.

CAUTION