



PRODUCT SPECIFICATION


BA72U, BA60U, BA54U, BA48U Duraskin Backboard Padding

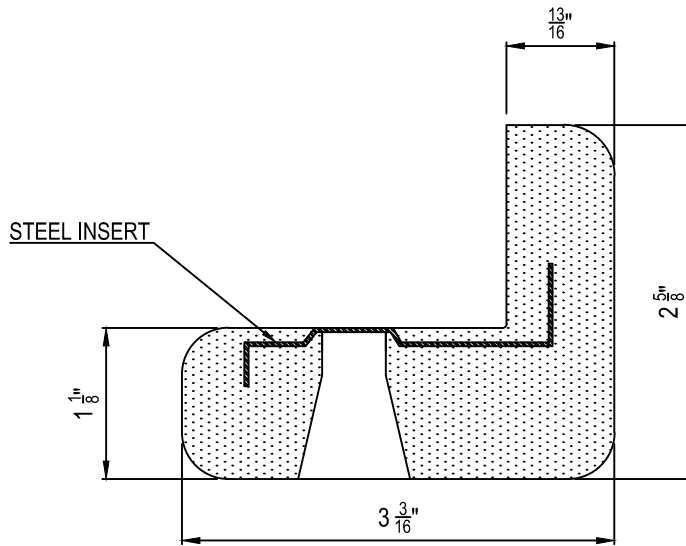

CROSS SECTION

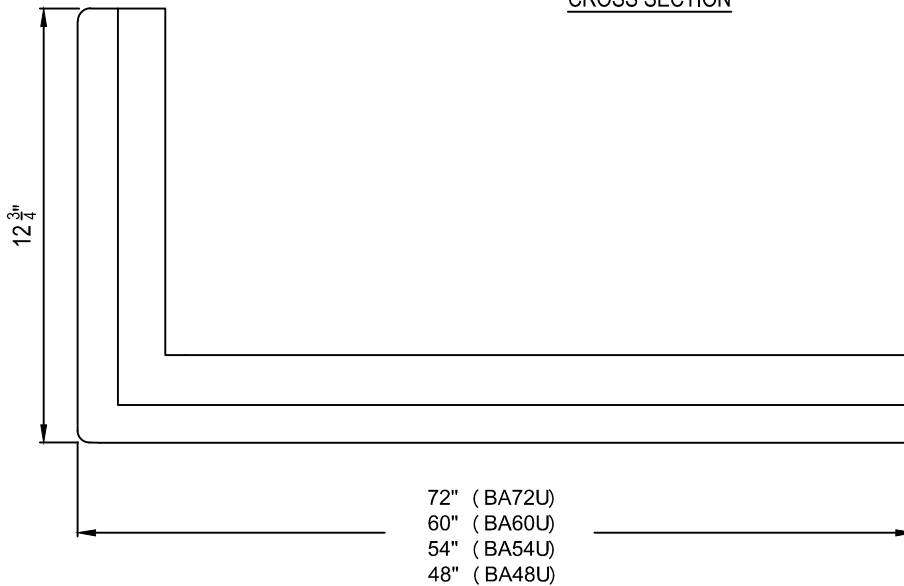

FRONT

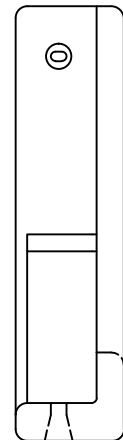

SIDE

Padding shall be molded with an integral skin and have a tear strength of no less than 125 psi. Each left hand and right hand section shall be no less than $\frac{3}{4}$ " thick and cover the lower and bottom edge of the backboard no less than $2 \frac{1}{2}$ " high and 3" deep. Padding shall protect both sides of backboard a minimum of 12" from the bottom of the backboard. Molded in steel inserts shall provide mounting locations to allow padding to be screwed to backboard frame. Padding shall be black and carry a 1-year limited warranty. Mounting hardware shall be included. Installation to be completed in accordance to manufacturer's instructions. Do not scale drawings. Specify BA72U for 72" backboards, BA60U for 60" backboards, BA54U for 54" backboards and BA48U for 48" backboards