



www.gillathletics.com  
800-637-3090

## 403 - ALUMINUM HIGH SCHOOL HURDLE ASSEMBLY INSTRUCTIONS

Part #	Description	Qty
1	40305 403 Base Leg - Alum	2
2	40306 Leg Weight 403	2
3	40308 Crossbrace	1
4	M1228 5/16"-18 x 2" Hex Bolt	4
5	M1254 5/16"-18 Hex Nut	4
6	N4031 403 End Cap	2
7	M1278 Spring Button, Hurdle	2
8	40344 Capped Gate Tube	2
9	40346 SS Reg 41" Gateboard	1
10	M446 Bracket, Gate Tube, Plastic	2
11	M1273 1/4"-20 x 2 3/4" Screw, SL HD Truss	4
12	M1274 1/4"-20 Nylock Thin Hex Nut	4

Tools required:

1 x Flat Head Screwdriver

1 x 7/16" Wrench

2 x 1/2" Wrench


It is recommend that gate board (#9) is attached to gate tubes (#8) with bracket (#10) and screws (#11) before sliding gate tubes onto legs. Tighten nuts (#12) just enough to allow screws to freely turn in gate board.

Legs are boxed with leg weights installed and held in place with orange plugs. To remove plastic plugs, insert a bolt (#4) into the opposite side and push the plug out.

Leave the bolt in place while lining the leg up with the crossbrace.

If necessary, remove the bolt and insert it from the other side before bolting the leg to the crossbrace.

Install the spring buttons with spring fold down and buttons facing inward. If the spring buttons are installed with the spring fold up and exposed, they may be dislodged if the gateboard is lowered past the 30" position.

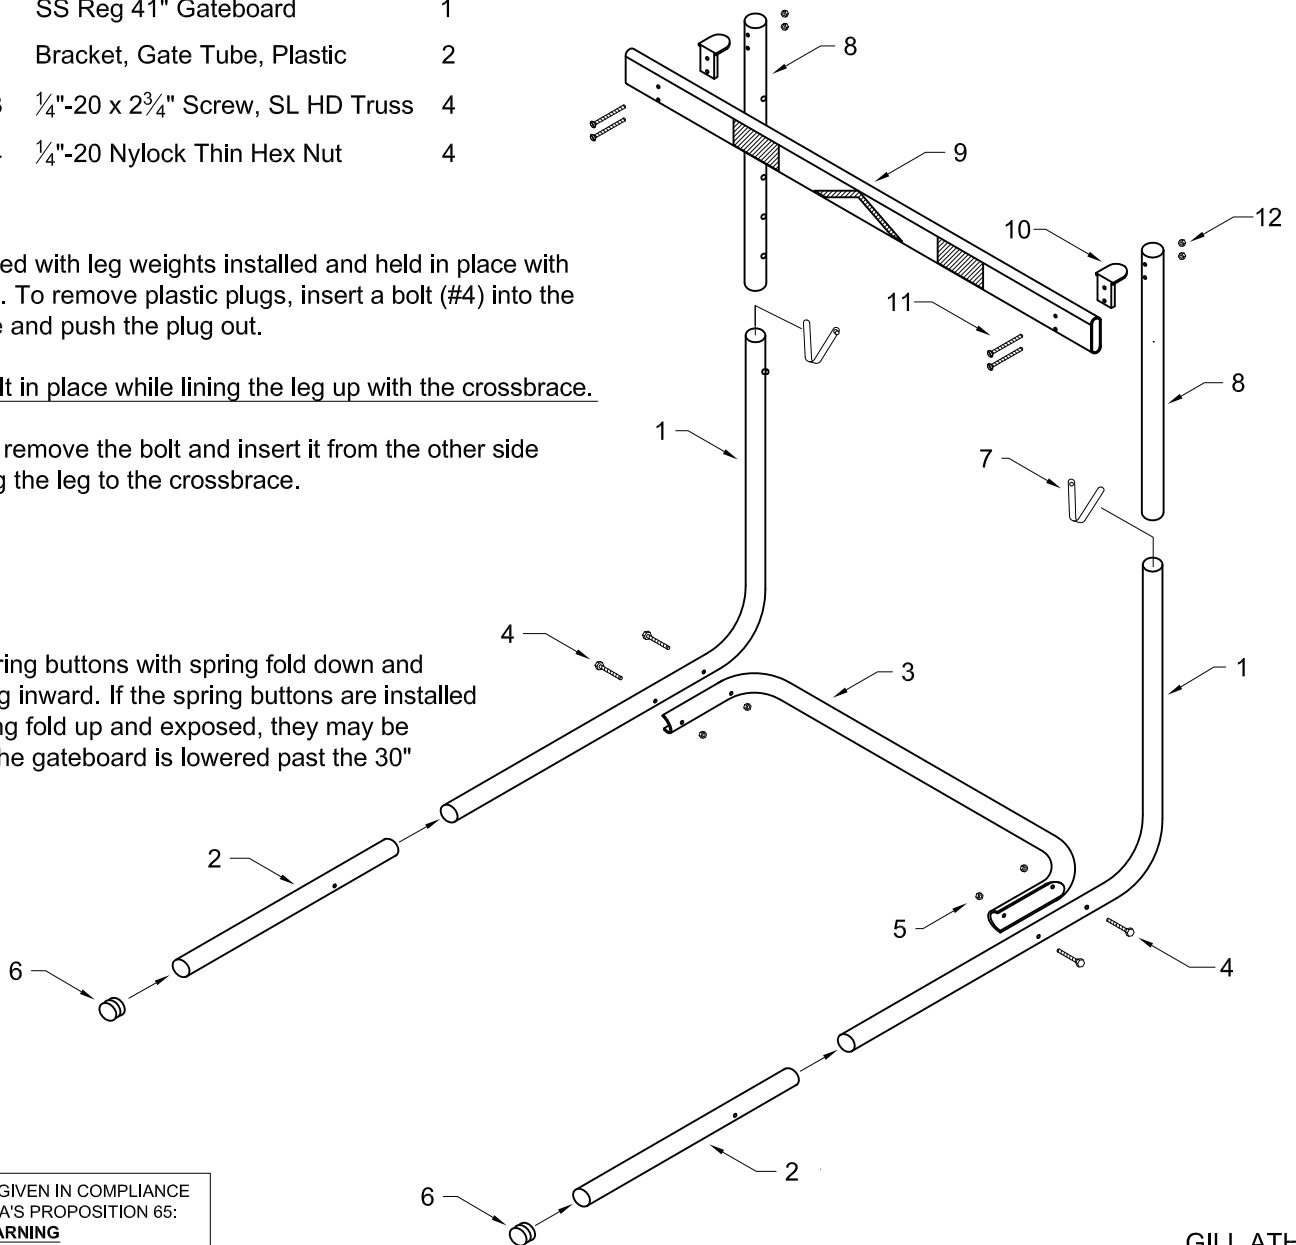

THIS WARNING IS GIVEN IN COMPLIANCE  
WITH CALIFORNIA'S PROPOSITION 65:

**WARNING**

This product contains chemicals known to the  
State of California to cause cancer, birth defects  
or other reproductive harm.

Copyright ©2011 by Gill Athletics. All rights reserved.

GILL ATH  
11-21-11  
INST403