

175 - GOOSENECK OUTDOOR BACKSTOP


5' EXTENDED OUTDOOR BACKSTOP FOR FAN BACKBOARDS

Porter
 WWW.PORTERATHLETIC.COM/FACILITY



BASKETBALL SPECIFICATION SHEET

R-175

SHOWN WITH No. 267 FAN FIBERGLASS BACKBOARD
 SELECT BACKBOARD FROM CHART BELOW



SHOWN WITH No. 00235000
 STANDARD GOAL - SELECT
 GOAL FROM CHART BELOW

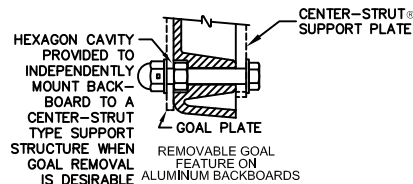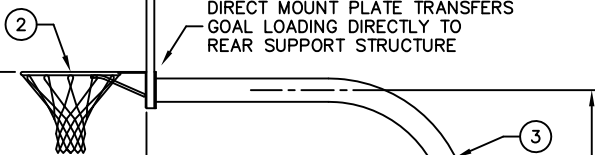

DIRECT MOUNT PLATE TRANSFERS
 GOAL LOADING DIRECTLY TO
 REAR SUPPORT STRUCTURE

OPTIONAL UPRIGHT
 PADDING (SPECIFY)

FINISHED GRADE

4½" DIA.
 (11.4cm)

6'-0"
 (1.83m)

10'-0"
 (3.05m)

5'-0"
 (1.53m)

9'-8½"
 (2.96m)

CAUTION - Contact local utility companies to
 locate buried electrical, gas water lines, etc.
 BEFORE DIGGING HOLE FOR FOOTING. Also
 check for overhead utilities.

SLOPE TOP
 OF FOOTING

1½"
 (12.7mm)

3"
 (76mm)

3'-0" ±
 (91.4cm)

* 3'-6"
 (1.07m)

* MINIMUM RECOMMENDED FOOTING
 SIZE SHOWN. INCREASE SIZE OF
 FOOTING AS REQUIRED ACCORDING TO
 LOCAL SOIL CONDITIONS, AND TO
 MEET LOCAL BUILDING CODES
 REGARDING MINIMUM WIND SPEEDS.
 CONSULT ARCHITECT OR ENGINEER
 AS NECESSARY.

CONCRETE
 FOOTING

* 2'-0" Ø
 (61.0cm)

See R-69 - 000690XX UPRIGHT PROTECTIVE PADDING
 IN STANDARD PORTER COLORS

NOTE - SEE INDIVIDUAL DRAWINGS FOR BACKBOARD, GOAL AND PADDING SPECIFICATIONS

PARTS LIST		
No.	QTY.	DESCRIPTION
1	1	BACKBOARD SEE CHART BELOW
2	1	GOAL
3	1	UPRT 00162 OGO UPRIGHT: 4½" DIA. ZINC FC

4½" DIA. SUPPORT POLE
 GOOSENECK POLE STYLE

PART NUMBER:

— 175 —

(Galvanized)

— 175 — CXX

(Powder-coat, select color)

NOTE - Upright can be provided in Porter's
 standard powder-coat colors at additional cost.
 Refer to Porter's powder-coat color chart.

BOARD	GOAL	00235000	00202H00	00251H00	236H00
267	12	13	14	15	
234	22	23	24	25	
234A	32	33	34	35	

EXAMPLE: No. 17522 - INCLUDES
 234 ALUMINUM BACKBOARD AND
 00235000 GOAL

COLOR SELECTION (For 175 __ CXX only)

01 - Light Blue	10 - Maroon
02 - Royal Blue	11 - Purple
03 - Red	12 - Black (Gloss)
04 - White	13 - Navy Blue
05 - Orange	14 - Kelly Green
06 - Yellow Gold	15 - Dark Green
07 - Silver	22 - Arch. Gray
08 - Gold	23 - Arch. Black
09 - Gray	

Porter®

1-800-637-3090 PORTER@PORTERATHLETIC.COM
 © COPYRIGHT 2017 PORTER ATHLETIC - ALL RIGHTS RESERVED

PROJECT NUMBER _____

PROJECT NAME _____

6/27/2017

175 - GOOSENECK OUTDOOR BACKSTOP

5' EXTENDED OUTDOOR BACKSTOP FOR FAN BACKBOARDS

SPECIFICATIONS

PORTER No. 175 __ (CXX) – 5' EXTENDED SINGLE POST BACKSTOP

Face of backboard shall be 5'-0" (1.53m) extended from the centerline of the formed upright support. Upright support shall be 4-1/2" (11.4cm) O.D., 7ga. wall (0.180", 4.57mm), zinc Flo-Coated steel tube formed to an approximate 24" (61.0cm) radius. Vertical section shall extend 3'-0" (91.4cm) into a concrete footing and shall be secured by welded anchor lugs. Horizontal section shall be fabricated with a special, slotted mounting plate to level the backboard and goal. Bolts from the front mounted goal shall mount directly through the backboard and into the Center-Strut® mounting plate to eliminate any strain on the backboard should a player hang on the front mounted goal.

__ designates backboard and goal required – see chart on opposite side of this sheet for selection – specify. For specifications of backboards or goals, see specific page in backboard/goal section.

CXX designates optional powder-coat color - see chart on opposite side of this sheet for selection - specify. Upright can be provided in Porter's standard powder-coat colors. Refer to Porter's powder-coat color chart.

OPTIONAL ITEMS TO SPECIFY

See Page No. R-69 for specifications on Porter No. 000690XX Upright Padding (Each).

PORTER
WWW.PORTERATHLETIC.COM/FACILITY

BASKETBALL SPECIFICATION SHEET

R-175